

本资料所载产品图片数据仅供参考，具体数据以产品实际尺寸为准，
如有更改恕不另行通知，本资料最终解释权归本公司所有。
2020年11月印刷。

为建筑做到极致
WWW.FSTIANBIAN.COM



田边官网



微信公众号

广东田边建筑五金制品有限公司

生产基地：广东省肇庆市高要区金利金盛工业园

联系电话：0758-859 3728

传真：0758-859 3977

电子邮箱：TB3008@126.com

Guangdong Tianbian Building Hardware Products Co., Ltd.

Production Base: Jinsheng Industrial Park, Jinli Town, Gaoyao District,
Zhaoqing City, Guangdong Province.

Tel: 0758-859 3728

Fax: 0758-859 3977

E-mail: TB3008@126.com

铝合金门窗五金产品

ALUMINUM ALLOY DOORS & WINDOWS
HARDWARE PRODUCTS

广东田边建筑五金制品有限公司

铝合金门窗五金产品

COMPANY PROFILE

公司简介


广东田边建筑五金制品有限公司成立于1989年，坐落于广东肇庆金盛工业园，占地面积约五万平方米，是一家集研发、生产、销售于一体的专业门窗、幕墙与门控五金配套件制造企业。曾荣获中国门窗幕墙五金十佳品牌、中国著名品牌、中国科技创新重点保护品牌、中国五金行业推荐品牌、中国工程建设推荐品牌、全国质量信誉保证·畅销品牌等。

公司以“实力铸就品质，服务铸就品牌”为核心经营理念，以“共谋福祉、共享未来”为企业使命。拥有企业独立自主的研发中心，可以根据客户的需要和要求，开发适合各种铝型材及各种功能的五金产品。拥有先进的智能化生产制造设备，并建立了企业自己的产品检测中心，对于出厂产品进行严格的检验检测，严守质量关口。以卓越的产品质量，赢得广大用户的认可和好评。

Founded in 1989, Guangdong Tianbian Building Hardware Co., Ltd with its 50,000 square meters production base was located in Jinsheng Industrial Park, Zhaoqing City, Guangdong Province. We are a professional manufacturer with own R&D, production and sales departments on window & door hardware, curtain wall hardware and door closer hardware. We have awarded China Top 10 window & door and curtain wall hardware brand, China Famous Brand, China scientific and technological innovation key conservation brand, China hardware industry recommended brand, China engineering construction recommended brand, China quality reputation assurance & best-selling brand, etc.

With the core business philosophy “strength cast quality, service create brand” and “seeking welfare, sharing better future” enterprise mission, we have independent R&D center which can R&D all kinds of aluminum profile and functional hardware according to customer’ s need and demand. We also have advanced smart production equipment and product test center which can assure the products are in best quality to win the recognition and praise from the majority of users.







海南海洋欢乐世界



昌西核电厂



海南富力湾



重庆旭辉城



河东综合交通枢纽中心



武汉火车站



马来西亚碧桂园



云南大理洱海传奇



包头富力院士廷



福建三明富力爱丁堡



中豪襄阳国际商贸城



宁波中海国际



重庆泽科弹子石中心



重庆银翔翡翠谷



深圳大都汇



西安富力白鹭湾



山西太原富力湾



浙江湖州富力城



珠海澳门大学



河南远大理想城



河南清华大溪地



山东威海那香海



天津梅江风景区西子花园




云南螺蛳湾商贸城

DIRECTORY

1-1	公司简介	
	COMPANY PROFILE	
1-2	品牌历程	
	BRAND HISTORY	
02	门窗系统	
	DOORS AND WINDOWS SYSTEM	
2-1	内平开下悬窗五金系统 TB-NK380系列	01
	INWARD OPEN HOPPER WINDOW HARDWARE SYSTEM TB-NK380 SERIES	
2-2	TB-NK380系列五金系统配置	02
	TB-NK380 SERIES HARDWARE SYSTEM CONFIGURATION	
2-3	NK380内平开下悬窗安装示意图	03
	NK380 INWARD OPEN HOPPER WINDOW INSTALLATION INSTRUCTION	
2-4	隐藏式内平开下悬窗五金系统 TB-YNK100系列	04
	HIDDEN-STYLE INWARD OPEN HOPPER WINDOW HARDWARE SYSTEM TB-YNK100 SERIES	
2-5	欧标20槽内平开窗五金系统 TB-NK200系列	05
	EUROPEAN STANDARD 20 GROOVE INWARD OPEN CASEMENT WINDOW HARDWARE SYSTEM TB-NK200 SERIES	
2-6	欧标20槽内平开窗五金系统 TB-NK250系列	06
	EUROPEAN STANDARD 20 GROOVE INWARD OPEN CASEMENT WINDOW HARDWARE SYSTEM TB - NK250 SERIES	
2-7	欧标20槽外平开窗五金系统 TB-WK100系列	07
	EUROPEAN STANDARD 20 GROOVE OUTWARD OPEN WINDOW HARDWARE SYSTEM TB-WK100 SERIES	
2-8	无槽外平开窗五金系统 TB-WK200系列	08
	SLOTLESS OUTWARD OPEN CASEMENT WINDOW HARDWARE SYSTEM TB-WK200 SERIES	
2-9	欧标20槽外平开窗五金系统	09
	EUROPEAN STANDARD 20 GROOVE OUTWARD OPEN CASEMENT WINDOW HARDWARE SYSTEM	
2-10	幕墙上悬窗五金系统	10
	CURTAIN WALL TOP HUNG WINDOW HARDWARE SYSTEM	
2-11	内平开微通风五金系统 TB-NK800系列	11
	INWARD OPEN MICRO VENTILATION WINDOW HARDWARE SYSTEM TB-NK800 SERIES	
2-12	外平开微通风五金系统 TB-WK850系列	12
	OUTWARD OPEN MICRO VENTILATION WINDOW HARDWARE SYSTEM TB-WK850 SERIES	
2-13	欧标20槽内倒窗五金系统 TB-ND100系列	13
	EUROPEAN STANDARD 20 GROOVE TILT-TURN WINDOW HARDWARE SYSTEM TB-ND100 SERIES	
2-14	平推窗五金系统 TB-PT100系统	14
	PARALLEL OPENING WINDOW HARDWARE SYSTEM TB-PT100 SYSTEM	
2-15	平开门五金系统	15
	SWING DOOR HARDWARE SYSTEM	
2-16	平开门五金系统 TB-PM200系列（不带锁芯）	17
	SWING DOOR HARDWARE SYSTEM TB-PM200 SERIES (WITHOUT KEY CYLINDER)	
2-17	平开门五金系统 TB-PM50系列	18
	SWING DOOR HARDWARE SYSTEM TB-PM50 SERIES	
2-18	推拉窗五金系统 TB-TL100系列	19
	SLIDING WINDOW HARDWARE SYSTEM TB-TL100 SERIES	
2-19	95TT推拉五金系统 TB-TL95系列	20
	95TT SLIDING HARDWARE SYSTEM TB-TL95 SERIES	
2-20	推拉窗五金系统 TB-TL210系列	21
	SLIDING WINDOW HARDWARE SYSTEM TB-TL210 SERIES	
2-21	推拉窗五金系统 TB-TL220系列	22
	SLIDING WINDOW HARDWARE SYSTEM TB-TL220 SERIES	
2-22	推拉折叠五金系统 TB-TLZD100系列	23
	SLIDING & FOLDING DOOR HARDWARE SYSTEM TB-TLZD100 SERIES	
2-23	TB-TLZD100系列五金系统配置	24
	TB-TLZD100 SERIES HARDWARE SYSTEM CONFIGURATION	

03 门窗五金产品

	DOOR AND WINDOW HARDWARE	
3-1	执手系列	25
	HANDLE SERIES	
3-2	面板执手系列	37
	PANEL HANDLE SERIES	
3-3	扣板系列	40
	LOCKING PLATE	
3-4	单点锁体	41
	SINGLE POINT LOCK BODY	
3-5	多点锁体	43
	MULTI-POINT LOCK BODY	
3-6	滑撑系列	45
	FRICTION STAY SERIES	
3-7	风撑系列	49
	WIND BRACING	
3-8	合页系列	53
	HINGE SERIES	
3-9	传动器系列	59
	TRANSMISSION BOX SERIES	
3-10	传动杆系列	61
	TRANSMISSION ROD SERIES	
3-11	连接器系列/传动块部件系列	64
	CONNECTOR SERIES/TRANSMISSION BLOCK PARTS SERIES	
3-12	锁座系列	65
	LOCK PLATE SERIES	
3-13	提升块系列	67
	LIFTING BLOCK SERIES	
3-14	中间锁系列	68
	CERTRAL LOCKING STRIKER SERIES	
3-15	插销系列	69
	BOLT SERIES	
3-16	安全索系列	70
	WINDOW SAFETY CATCHER SERIES	
3-17	条锁系列	71
	SLIDING LOCK SERIES	
3-18	拉手系列	74
	PULLING HANDLE SERIES	
3-19	推拉锁座系列	75
	SLIDING LOCK PLATE SERIES	
3-20	月牙锁系列	77
	CRESCENT LOCK SERIES	
3-21	锁钩系列	78
	LOCK HOOK SERIES	
3-22	滑轮系列	79
	PULLEY SERIES	


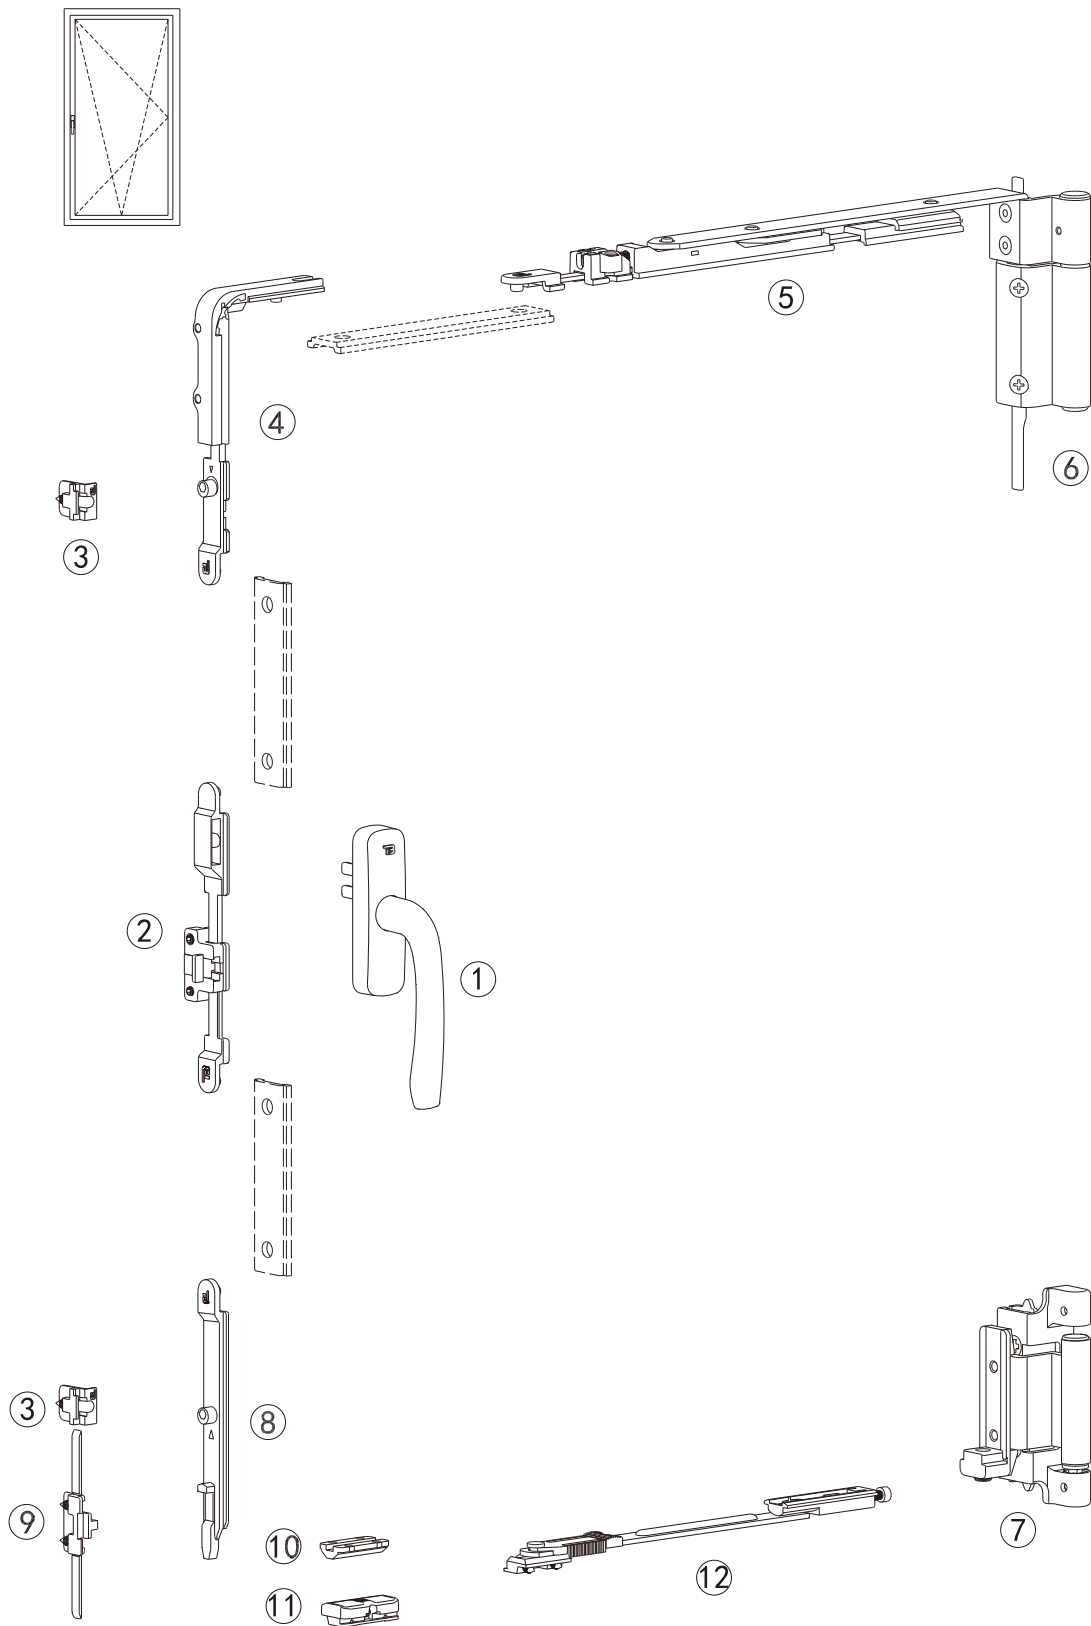


序号 No.	名称 Model No.	产品编号 Quantity	数量 The number of	备注 Remark
1	执手 handle	TB-ZB32N	1	可选配 optional
2	防误操作盒 Error-proof operation box	TB-FCD02	1	
3	锁座 lock plate	TB-SZ17A	2	
4	转角器 corner connector	TB-ZJ01	1	
5	斜拉杆 diagonal member	TB-XLG03	1	
6	上合页 upper hinge	TB-HY03	1	分左右 left or right option
7	下合页 lower hinge	TB-HY02	1	分左右 left or right option
8	下悬支撑杆 underhang support bar	TB-NK01	1	
9	防脱器 anti-fall device	TB-NK06	1	
10	提升块 lifting block	TB-TSK14	1	
11	支撑块 supporting block	TB-TSK11	1	
12	风撑 wind bracing	TB-FC05	1	规格依窗型而定 specifications according to window type



配置说明：
1.本系统适用于欧标20槽铝合金型材。
2.本系统适用于窗扇宽400-1000mm、窗扇高580-1500mm范围内的窗型，最大承重80kg。
3.以上配置仅供参考，具体配置请咨询我司技术部。



Configuration instruction：
1. this system apply to european standard 20 groove aluminum profile.
2. this system apply to range below width 400-1000mm, height 580-1500mm windows, maxium bearing capacity 80kg
3. the above configuration is for reference only. For specific configuration, please contact with our technical department.

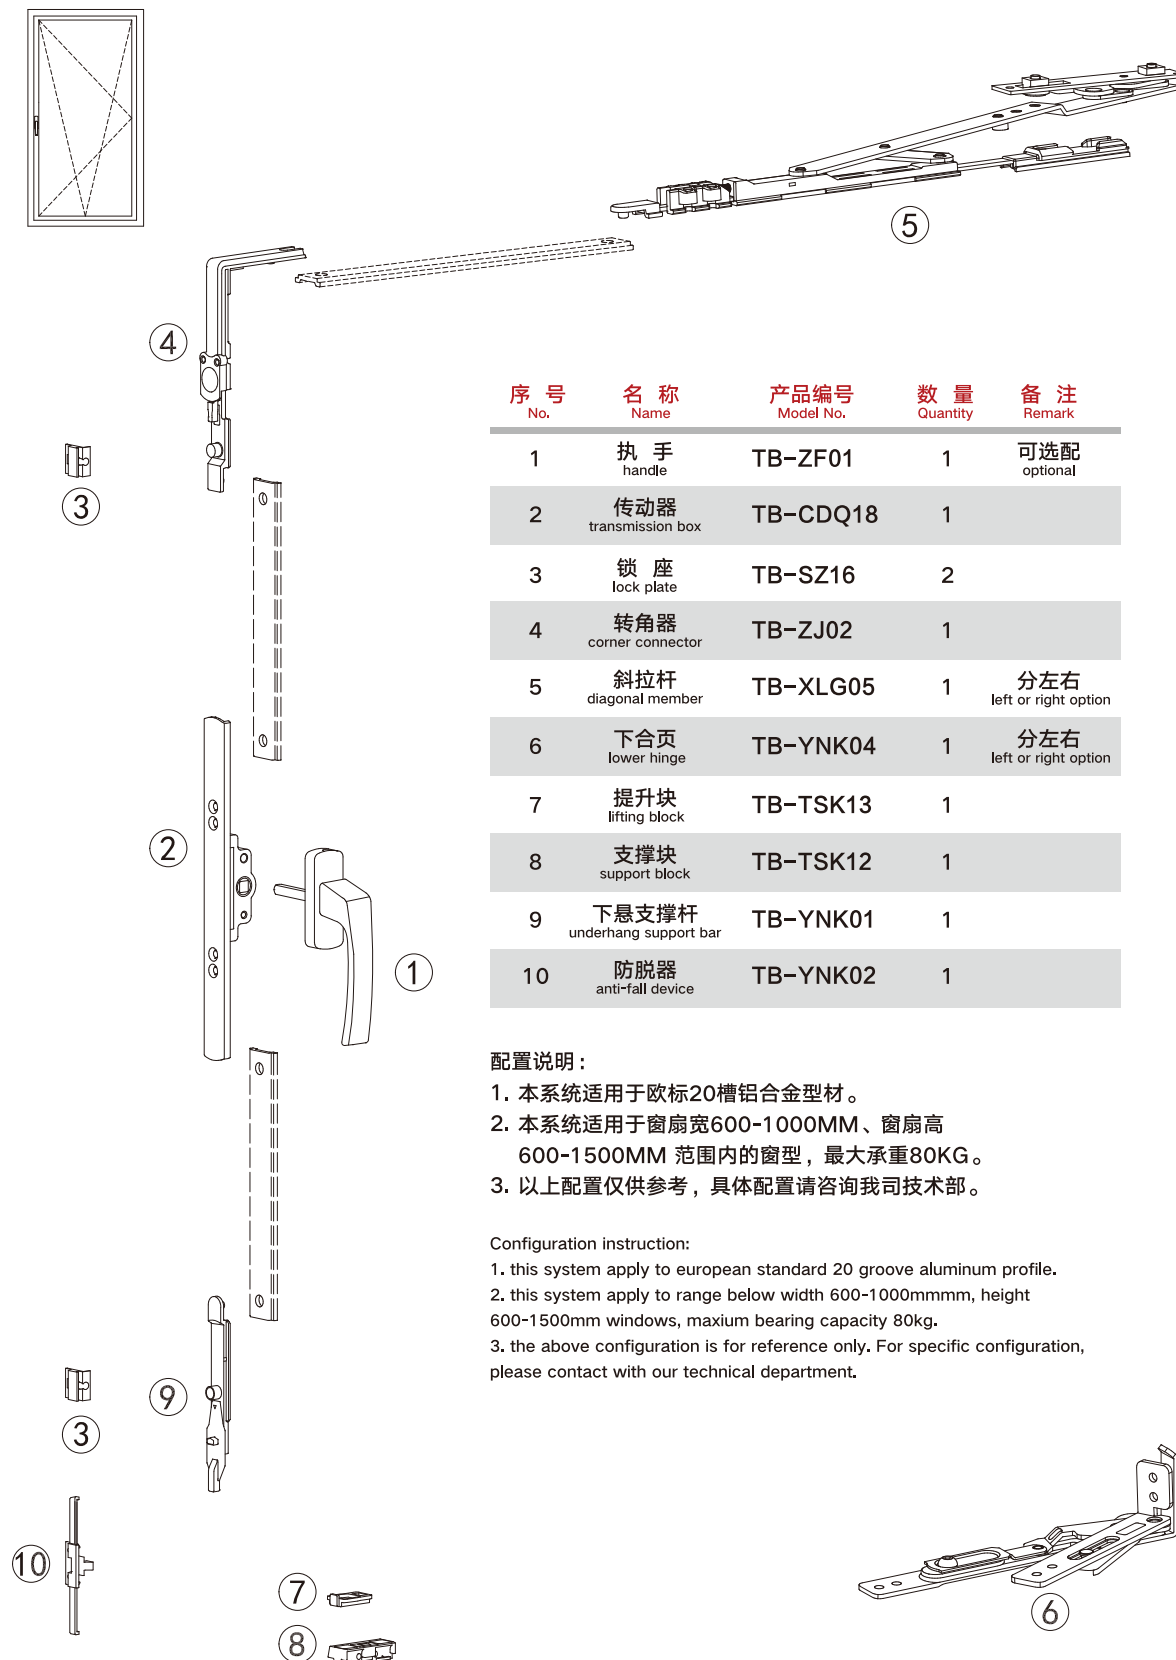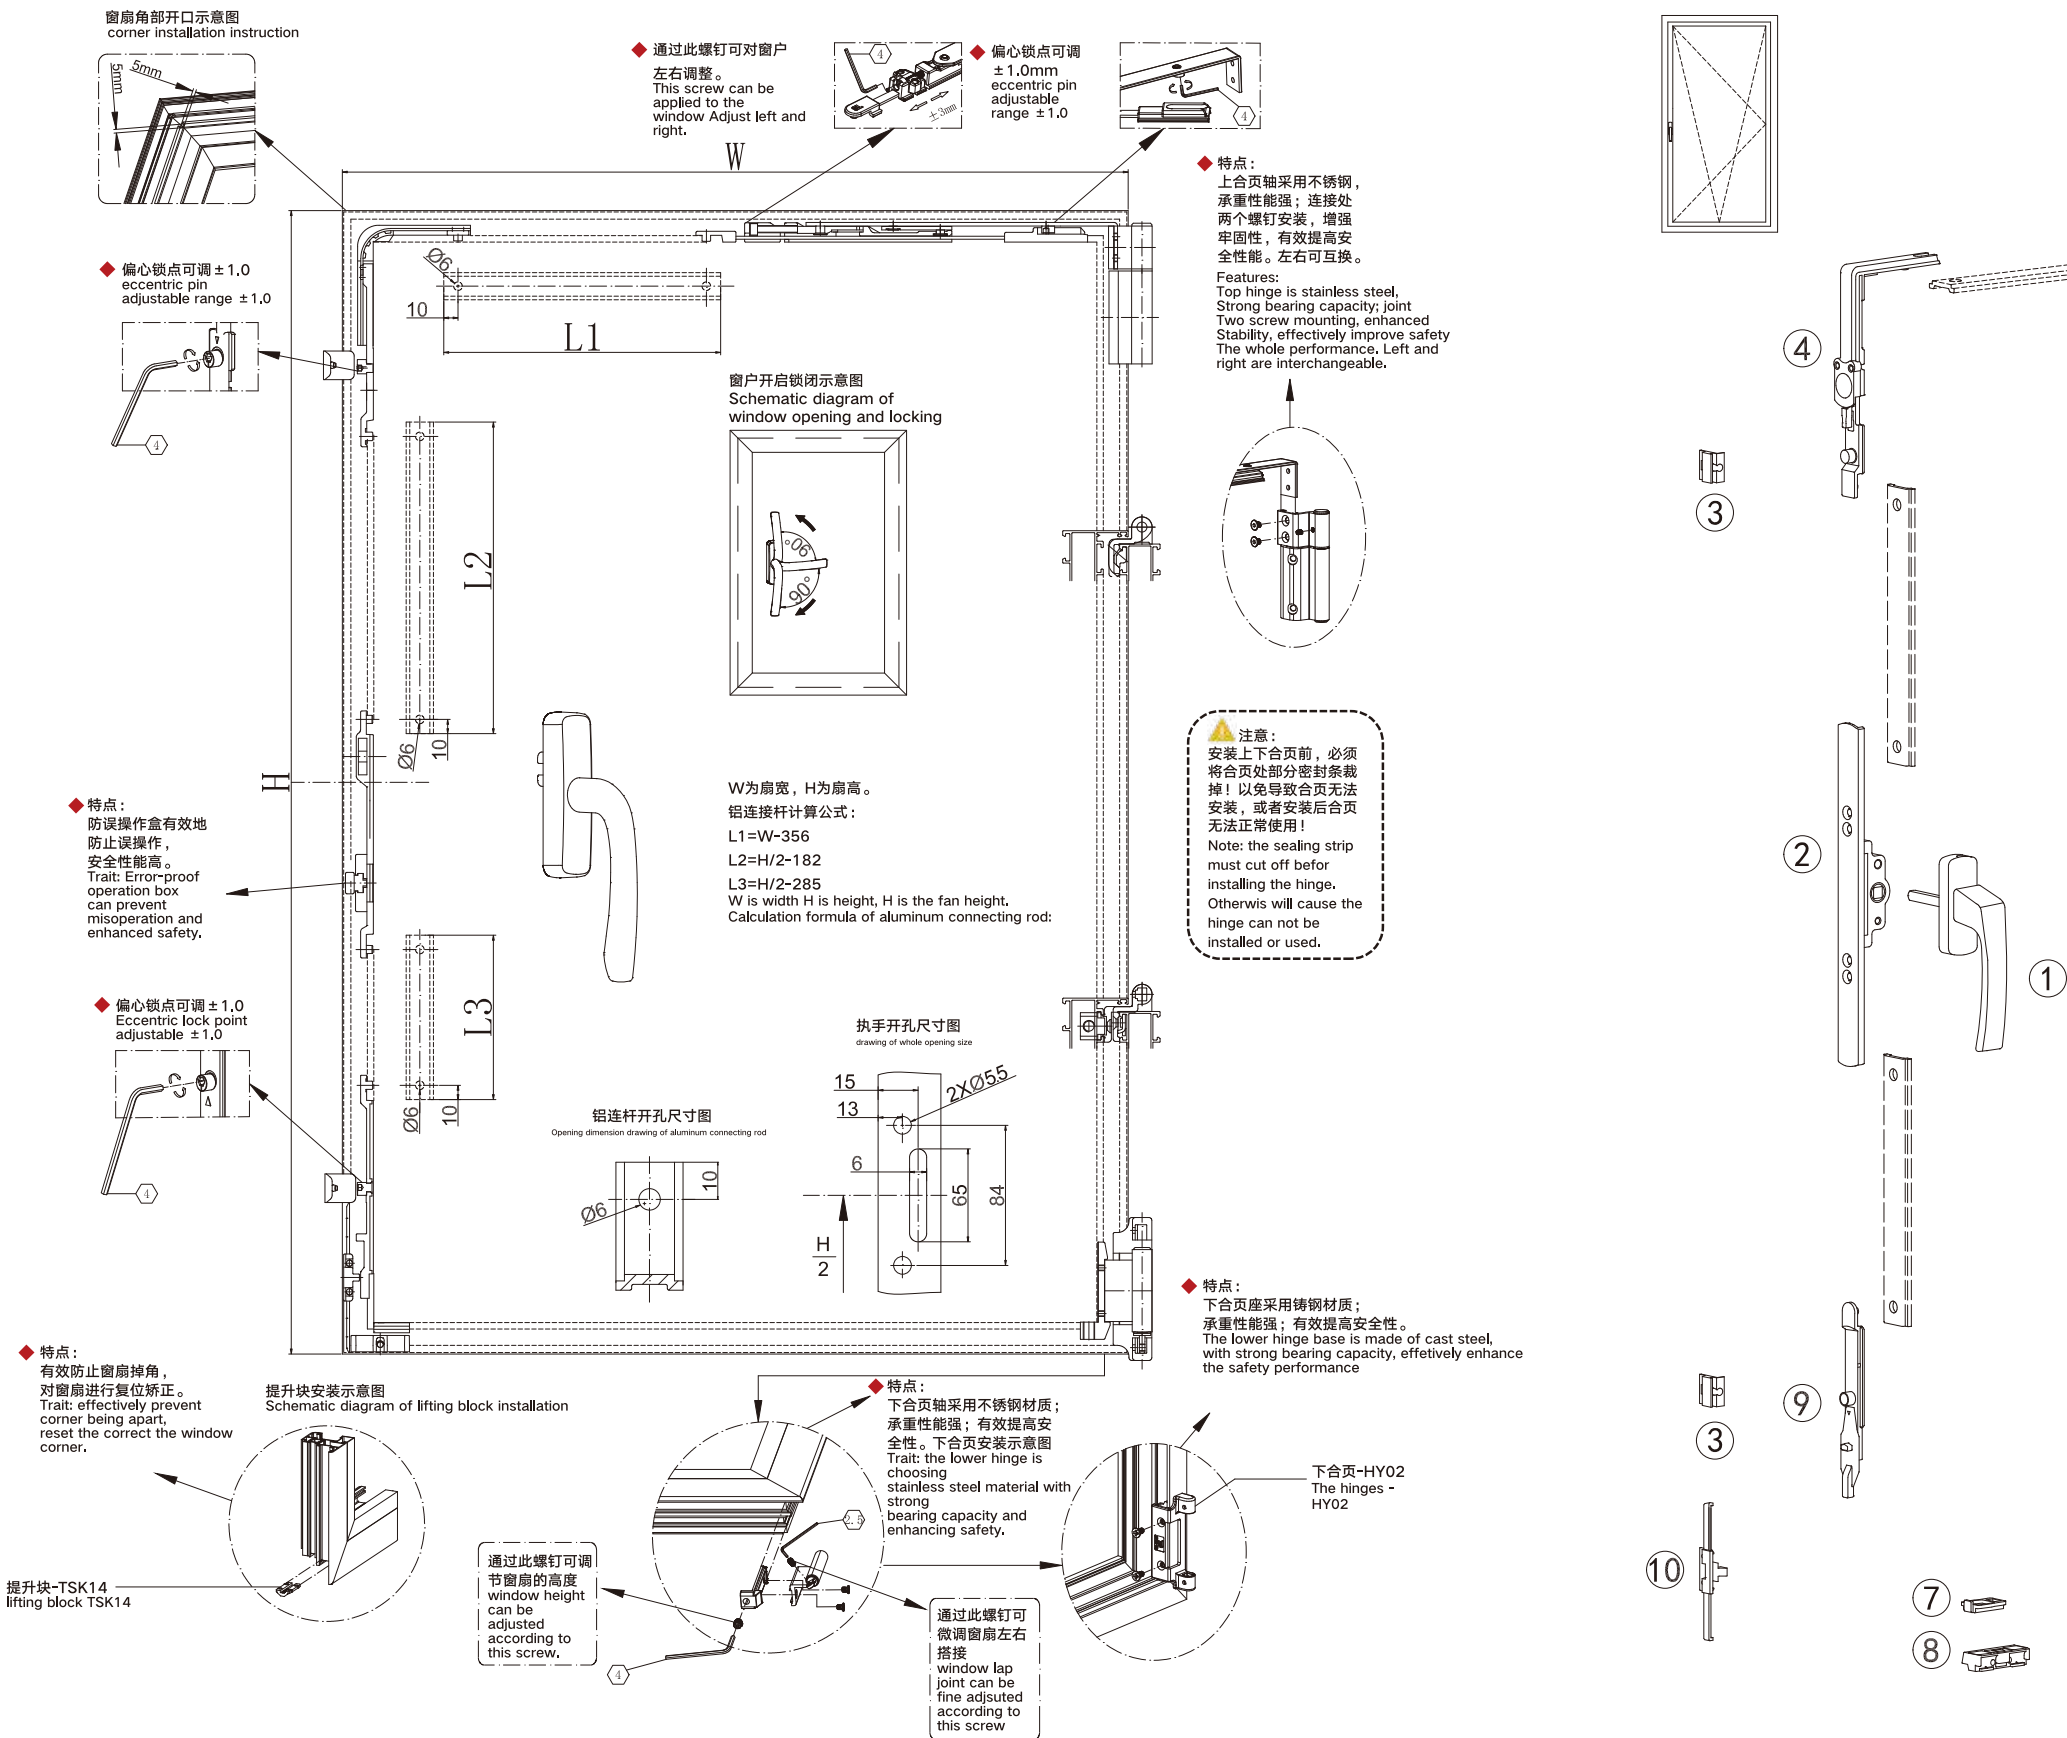

序号 No.	名称 Name	产品编号 Model No.	数量 Quantity	备注 Remark
1	执手 handle	TB-ZF01	1	可选配 optional
2	传动器 transmission box	TB-CDQ18	1	
3	锁座 lock plate	TB-SZ16	2	
4	转角器 corner connector	TB-ZJ02	1	
5	斜拉杆 diagonal member	TB-XLG05	1	分左右 left or right option
6	下合页 lower hinge	TB-YNK04	1	分左右 left or right option
7	提升块 lifting block	TB-TSK13	1	
8	支撑块 support block	TB-TSK12	1	
9	下悬支撑杆 underhang support bar	TB-YNK01	1	
10	防脱器 anti-fall device	TB-YNK02	1	

配置说明：
1. 本系统适用于欧标20槽铝合金型材。
2. 本系统适用于窗扇宽600-1000MM、窗扇高600-1500MM 范围内的窗型，最大承重80KG。
3. 以上配置仅供参考，具体配置请咨询我司技术部。

Configuration instruction:
1. this system apply to european standard 20 groove aluminum profile.
2. this system apply to range below width 600-1000mmmm, height 600-1500mm windows, maxium bearing capacity 80kg.
3. the above configuration is for reference only. For specific configuration, please contact with our technical department.









序 号 No.	名 称 Name	产品编号 Model No.	数 量 Quantity	备 注 Remark
1	执 手 handle	TB-ZF01	1	可选配 optional
2	传动器 transmission box	TB-CDQ14	1	
3	锁 座 lock plate	TB-SZ17A	2	
4	单柱锁钉块 single column locking block	TB-CD26	2	
5	隐藏式铰链 hidden type hinge	TB-YH03	2	
6	风 撑 wind bracing	TB-FC01	1	规格依窗型而定 specifications according to window type
7	提升块 lifting block	TB-TSK14	1	
8	提升块 lifting block	TB-TSK27	1	
9	中间锁座 middle lock point	TB-ZSZ01	1	选配 optional
10	中间锁座 middle lock point	TB-ZSZ02	1	选配 optional

配置说明：

- 1.本系统适用于欧标20槽铝合金型材。
- 2.隐藏式铰链最大承重为50kg。
- 3.以上配置仅供参考，具体配置请咨询我司技术部。

Configuration instruction:

1. this system apply to european standard 20 groove aluminum profile.
2. hindden type hinge maximun bearing capacity: 50kg.
3. the above configuration is for reference only. For specific configuration, please contact with our technical department.

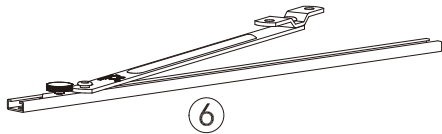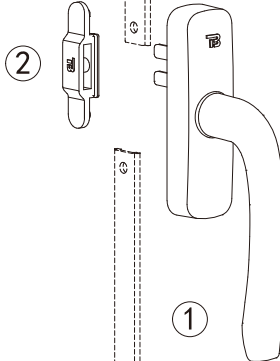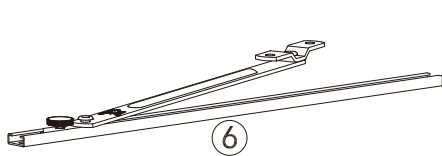



序 号 No.	名 称 Name	产品编号 Model No.	数 量 Quantity	备 注 Remark
1	执 手 handle	TB-ZB32N	1	可选配 optional
2	内开连接器 Inward open connector	TB-CD30	1	
3	锁 座 lock plate	TB-SZ17A	2	
4	单柱锁钉块 single column locking block	TB-CD26	2	
5	合 页 hinges	TB-H016	2	可选配 optional
6	风 撑 wind bracing	TB-FC01	1	规格依窗型而定 specifications according to window type
7	提升块 lifting block	TB-TSK14	1	
8	提升块 lifting block	TB-TSK27	1	
9	中间锁座 middle lock point	TB-ZSZ01	1	选配 optional
10	中间锁座 middle lock point	TB-ZSZ02	1	选配 optional













配置说明：

- 1.本系统适用于欧标20槽铝合金型材。
- 2.合页最大承重为55KG。
- 3.以上配置仅供参考，具体配置请咨询我司技术部。

Configuration instruction:

1. this system apply to european standard 20 groove aluminum profile.
2. hinge maximun bearing capacity 55kg.
3. the above configuration is for reference only. For specific configuration, please contact with our technical department.



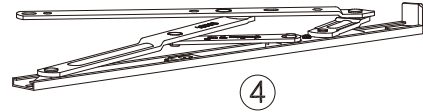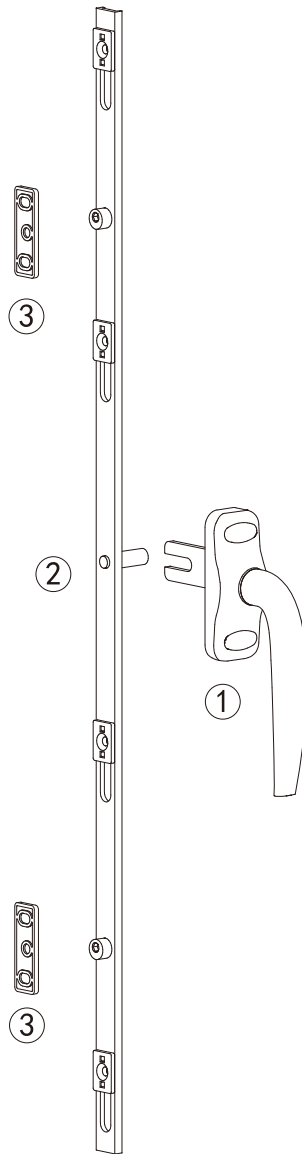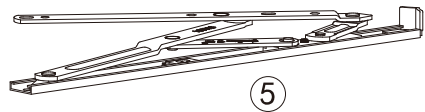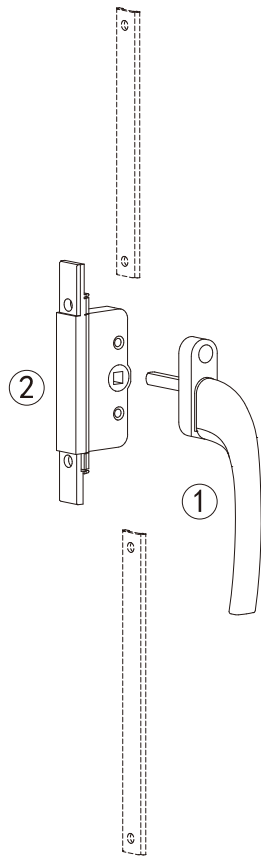

序号 No.	名称 Name	产品编号 Model No.	数量 Quantity	备注 Note
1	执手 handle	TB-ZF04	1	可选配 optional
2	传动器 transmission box	TB-CDQ14	1	
3	锁座 lock plate	TB-SZ17A	2	
4	单柱锁钉块 single column lock block	TB-CD26	2	
5	滑撑 friction stay	TB-HB	2	规格依据窗型而定 specifications according to window type
6	提升块 lifting block	TB-TSK14	1	选配 optional
7	提升块 lifting block	TB-TSK27	1	选配 optional
8	中间锁座 middle lock point	TB-ZSZ01	1	选配 optional
9	中间锁座 middle lock point	TB-ZSZ02	1	选配 optional
10	安全索 safety catcher	TB-AQS01	1	选配 optional

配置说明：

- 1.本系统适用于欧标20槽铝合金型材。
- 2.高层平开窗建议选配安全索，窗型较大建议选配中间锁座。
- 3.滑撑根据具体窗型大小参照滑撑系列介绍进行选配。
- 4.以上配置仅供参考，具体配置请咨询我司技术部。

Configuration instruction:

1. this system is suitable for European standard 20 groove aluminum alloy profiles.
2. high-rise building casement windows suggested adding safety catcher, large size window suggested adding middle lock point.
- 3.friction stay size should be chosen reffers to the window size or our frtcition stay instruction.
4. the above configuration is for reference only. For specific configuration, please contact with our technical department.



序号 No.	名称 Name	产品编号 Model No.	数量 Quantity	备注 Remark
1	执手 handle	TB-ZB03B	1	可选配 optional
2	传动杆 transmission rod	TB-CDG02	1	
3	锁座 lock plate	TB-SZ45A	2	
4	滑撑 friction stay	TB-HB	2	规格依窗型而定 specifications according to window type
5	提升块 lifting block	TB-TSK03	1	选配 optional
6	提升块 lifting block	TB-TSK04	1	选配 optional
7	中间锁座 middle lock point	TB-ZSZ03	1	选配 optional
8	中间锁座 middle lock point	TB-ZSZ04	1	选配 optional
9	安全索 safety catcher	TB-AQS01	1	选配 optional

配置说明：

- 1.本系统适用于无槽口铝合金型材。
- 2.高层平开窗建议选配安全索，窗型较大建议选配中间锁座。
- 3.滑撑根据具体窗型大小参照滑撑系列介绍进行选配。
- 4.以上配置仅供参考，具体配置请咨询我司技术部。

Configuration instruction:

1. this system apply to european standard 20 groove aluminum profile.
2. high-rise building casement windows suggested adding safety catcher, large size window suggested adding middle lock point.
3. friction stay size should be chosen reffers to the window size or our frtcition stay instruction.
4. the above configuration is for reference only. For specific configuration, please contact with our technical department.








序号 No.	名称 Name	产品编号 Model No.	系统名称 The name of the system TB-WK300 TB-WK400		备注 Remark
1	执手 handle	TB-ZB28B	1	1	可选配 optional
2	外开连接器 outward open connector	TB-CD03A	-	1	
3	传动杆 transmission rod	TB-CDG01	1	-	
4	锁座 lock plate	TB-SZ17A	2	2	
5	单柱锁钉块 Single column lock block	TB-CD26	-	2	
6	滑撑 friction stay	TB-HB	2	2	规格依窗型而定 specifications according to window type
7	中间锁座 middle lock point	TB-ZSZ01	1	1	选配 optional
8	中间锁座 middle lock point	TB-ZSZ02	1	1	选配 optional
9	安全索 safety catcher	TB-AQS01	1	1	选配 optional
10	提升块 lifting block	TB-TSK14	1	1	选配 optional
11	提升块 lifting block	TB-TSK27	1	1	选配 optional

配置说明：

- 1.本系统适用于欧标20槽铝合金型材。
- 2.高层平开窗建议选配安全索，窗型较大建议选配中间锁座。
- 3.滑撑根据具体窗型大小参照滑撑系列介绍进行选配。
- 4.以上配置仅供参考，具体配置请咨询我司技术部。

Configuration instruction :

1. this system apply to european standard 20 groove aluminum profile.
2. high-rise building casement windows suggested adding safety catcher, large size window suggested adding middle lock point.
3. friction stay size should be chosen refers to the window size or our friction stay instruction.
4. the above configuration is for reference only. For specific configuration, please contact with our technical department.

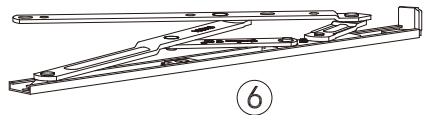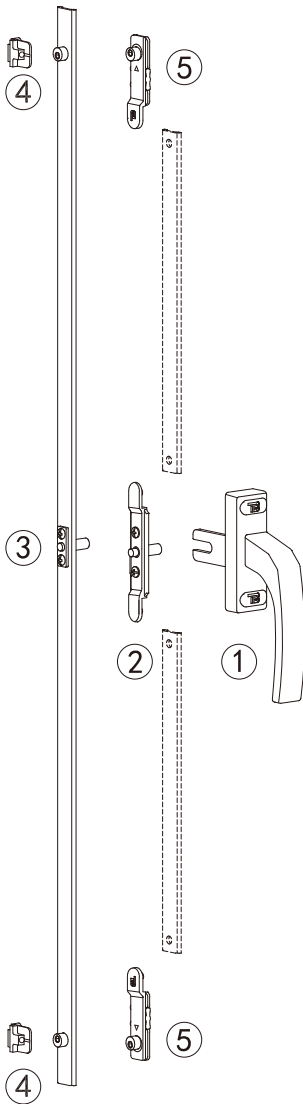








序号 No.	名称 Name	产品编号 Model No.	系统名称 The name of the system TB-WK900 TB-WK950		备注 Remark
1	执手 handle	TB-ZB02D	1	1	可选配 optional
2	传动杆 transmission rod	TB-CDG05A	1	-	
3	上悬连接器 top hung connector	TB-CD29	-	1	
4	锁座 lock plate	TB-SZ45A	2	6	
5	双柱锁钉块 double column locking block	TB-CD28	-	2	
6	转角器 corner connector	TB-ZJ01A	-	2	
7	单柱锁钉块 single column locking block	TB-CD26	-	2	
8	伸缩风撑 stretch wind bracing	TB-FC06	2	2	分左右 left or right
9	滑撑 friction stay	TB-HE	2	2	规格依据窗型而定 specifications according to window type
10	提升块 lifting block	TB-TSK03	2	2	选配 optional
11	提升块 lifting block	TB-TSK04	2	2	选配 optional
12	中间锁块 middle lock point	TB-ZSZ03	1	1	选配 optional
13	中间锁块 middle lock point	TB-ZSZ04	1	1	选配 optional



配置说明：

- 1.客户可根据产品列表执手系列选配我司其他类型的执手。
- 2.滑撑根据具体窗型大小参照滑撑系列介绍进行选配。
- 3.以上配置仅供参考，具体配置请咨询我司技术部。

Configuration instruction:

1. customer can choose other handles according to our handle product list.
2. friction stay size should be chosen refers to the window size or our frtcition stay instruction.
3. the above configuration is for reference only. For specific configuration, please contact with our technical department.

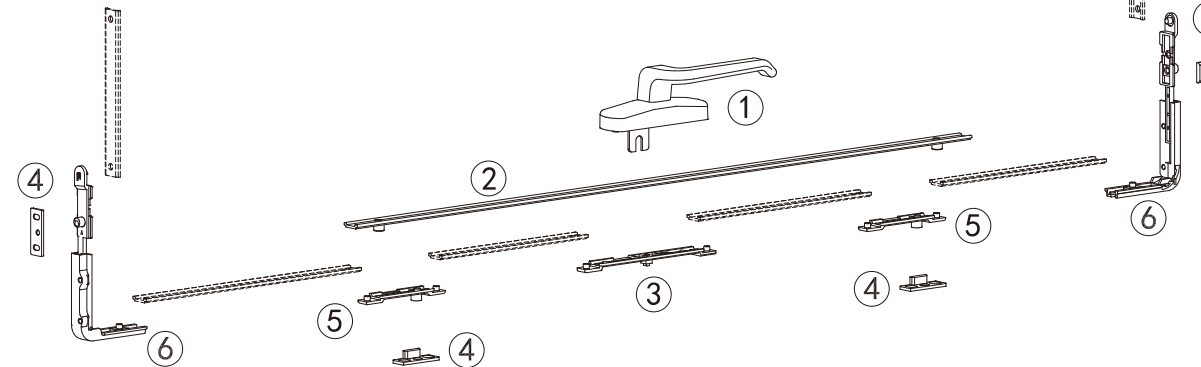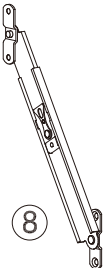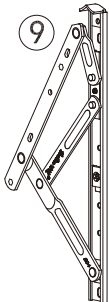
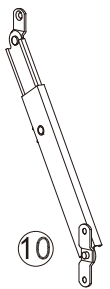
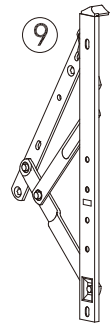


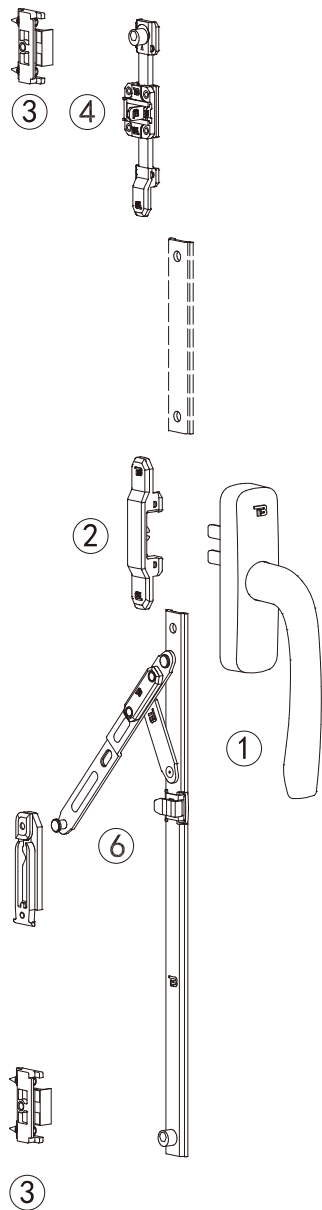

序号 No.	名称 Name	产品编号 Model No.	数量 Quantity	备注 Remark
1	执手 handle	TB-ZB32N	1	可选配 optional
2	内开连接器 inward open connector	TB-CD33	1	
3	锁座 lock plate	TB-SZ19A	2	
4	防误锁钉块 error-proof lock block	TB-FCD01	1	
5	合页 hinge	TB-H020	2	
6	传动杆 transmission rod	TB-CDG18	1	规格依窗型而定 specifications according to window type
7	中间锁座 middle lock point	TB-ZSZ01	1	选配 optional
8	中间锁座 middle lock point	TB-ZSZ02	1	选配 optional
9	风撑 wind bracing	TB-FC05	1	规格依窗型而定 specifications according to window type
10	提升块 lifting block	TB-TSK14	1	选配 optional
11	提升块 lifting block	TB-TSK27	1	选配 optional

配置说明：
1.本系统适用于欧标20槽铝合金型材。
2.建议窗型比例（高/宽）保持在1.5:1，最大承重为70kg
3.以上配置仅供参考，具体配置请咨询我司技术部。




Configuration instruction :
1. this system apply to european standard 20 groove aluminum profile.
2. suggeted window height & width proportion should be keep in 1.5: 1, maximum bearing capacity: 70kg.
3. the above configuration is for reference only. For specific configuration, please contact with our technical department.

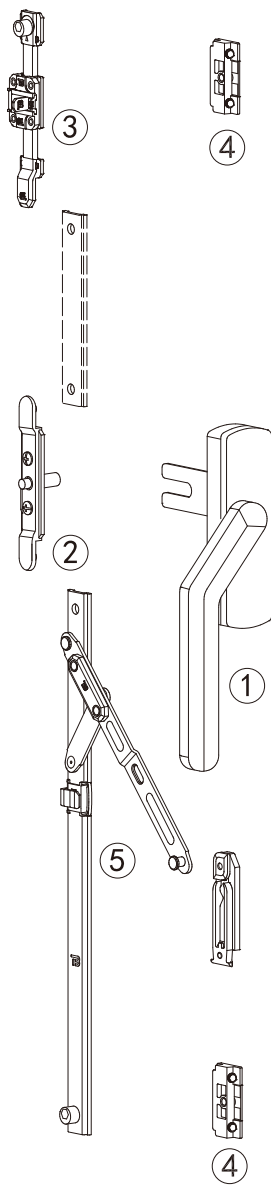




序号 No.	名称 Name	产品编号 Model No.	数量 Quantity	备注 Remark
1	执手 handle	TB-ZB42	1	可选配 optional
2	外开连接器 outward open connector	TB-CD03A	1	
3	防误锁钉块 Error-proof lock block	TB-FCD01	1	
4	锁座 lock plate	TB-SZ19A	2	可选配 optional
5	传动杆 transmission rod	TB-CDG18	1	规格依窗型而定 specifications according to window type
6	滑撑 friction stay	TB-HB	2	规格依窗型而定 specifications according to window type
7	中间锁座 middle lock point	TB-ZSZ01	1	选配 optional
8	中间锁座 middle lock point	TB-ZSZ02	1	选配 optional
9	安全索 safety catcher	TB-AQS01	1	选配 optional

配置说明：
1.本系统适用于欧标20槽铝合金型材。
2.建议窗型比例（高/宽）保持在1.5:1。
3.以上配置仅供参考，具体配置请咨询我司技术部。


Configuration description:
1. this system is suitable for European standard 20 groove aluminum alloy profiles.
2. suggeted window height & width proportion should be keep in 1.5: 1.
3. the above configuration is for reference only. For specific configuration, please contact our technical department.

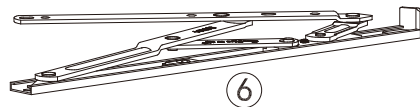

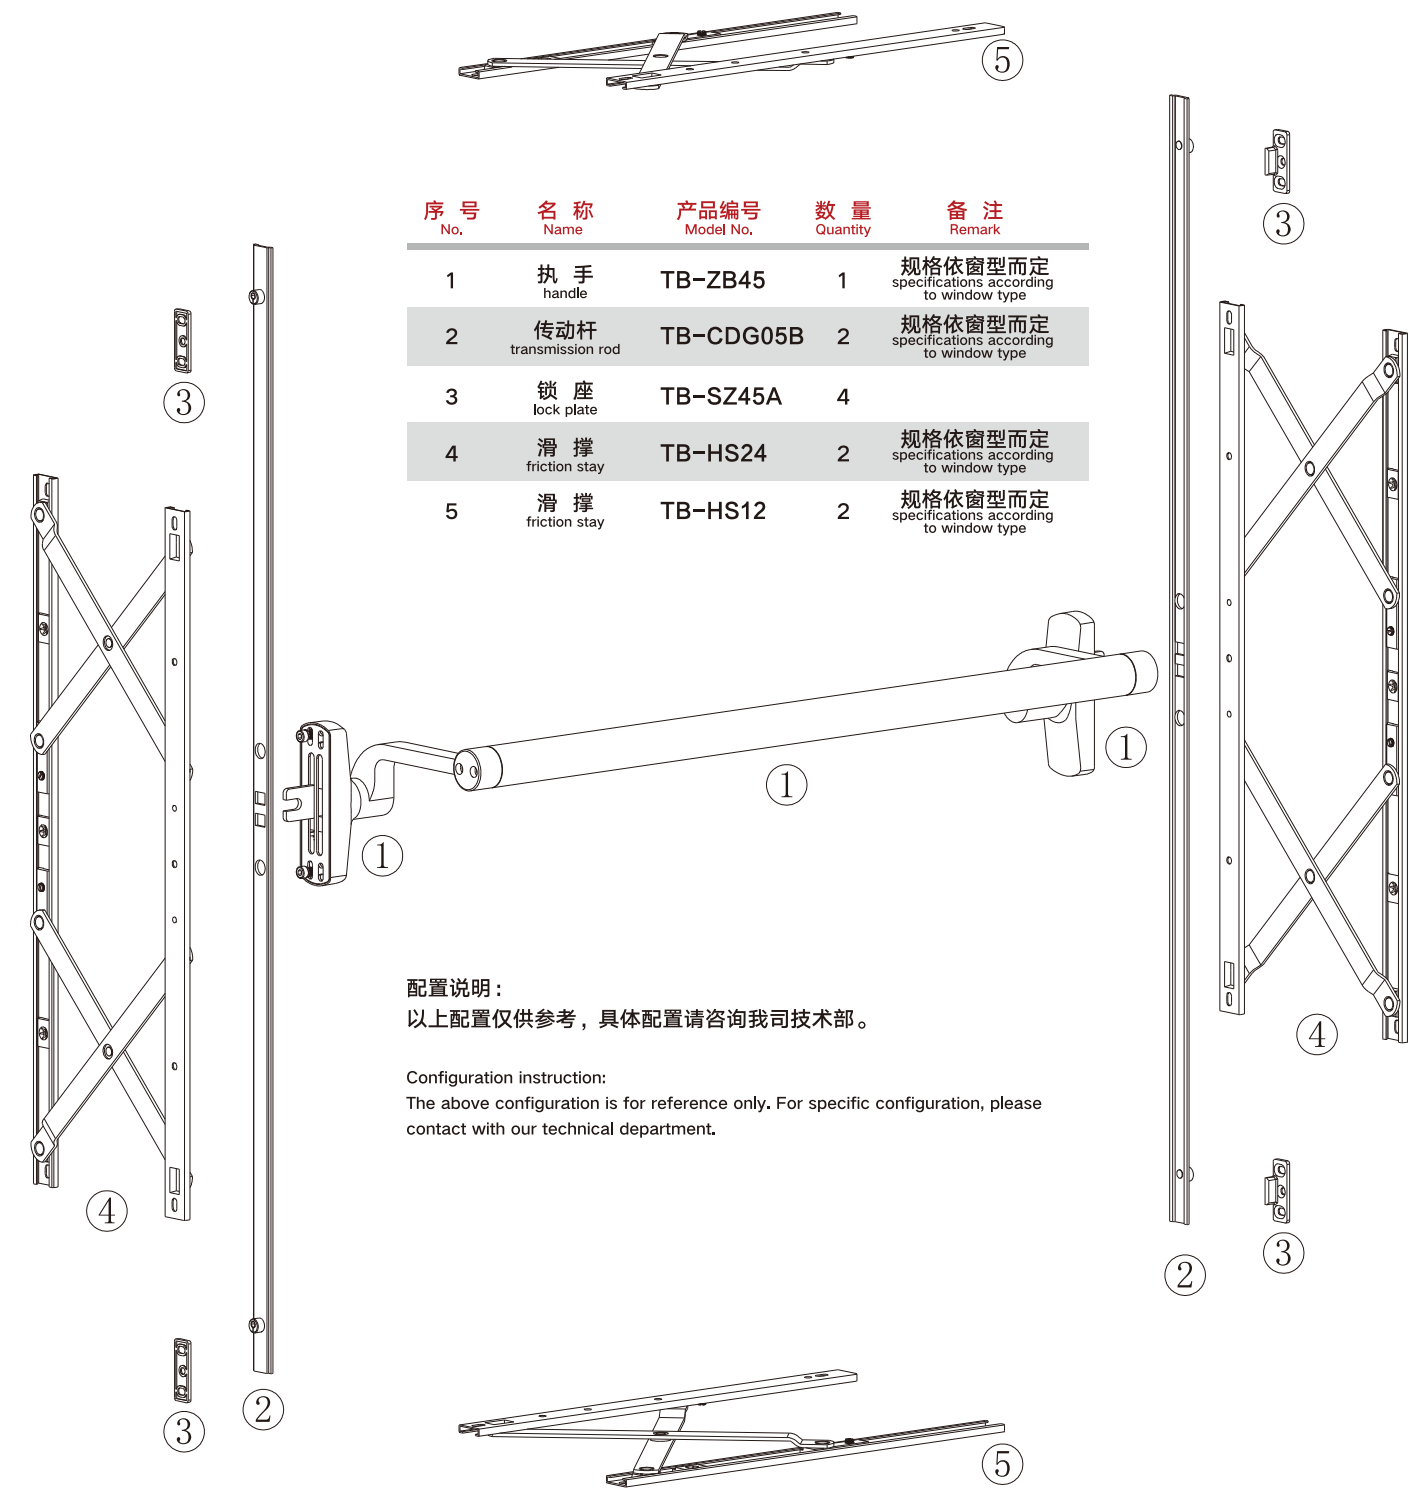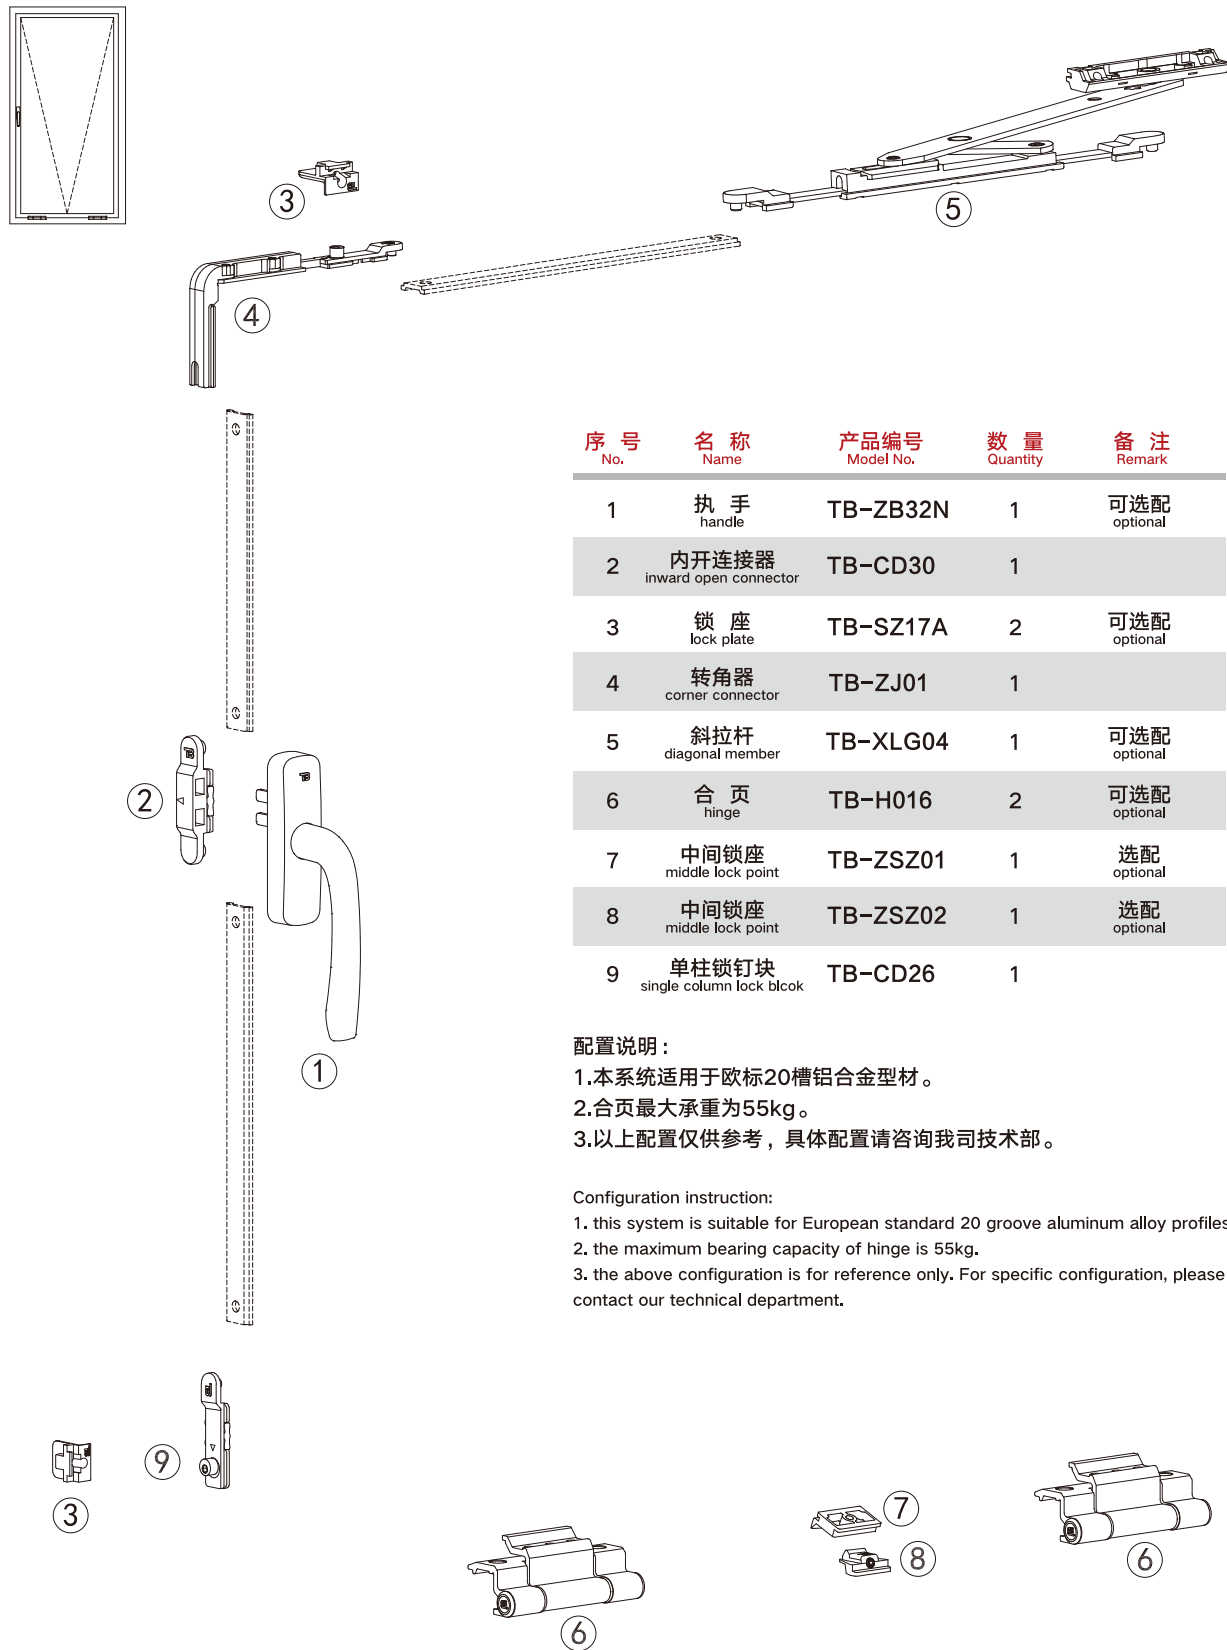


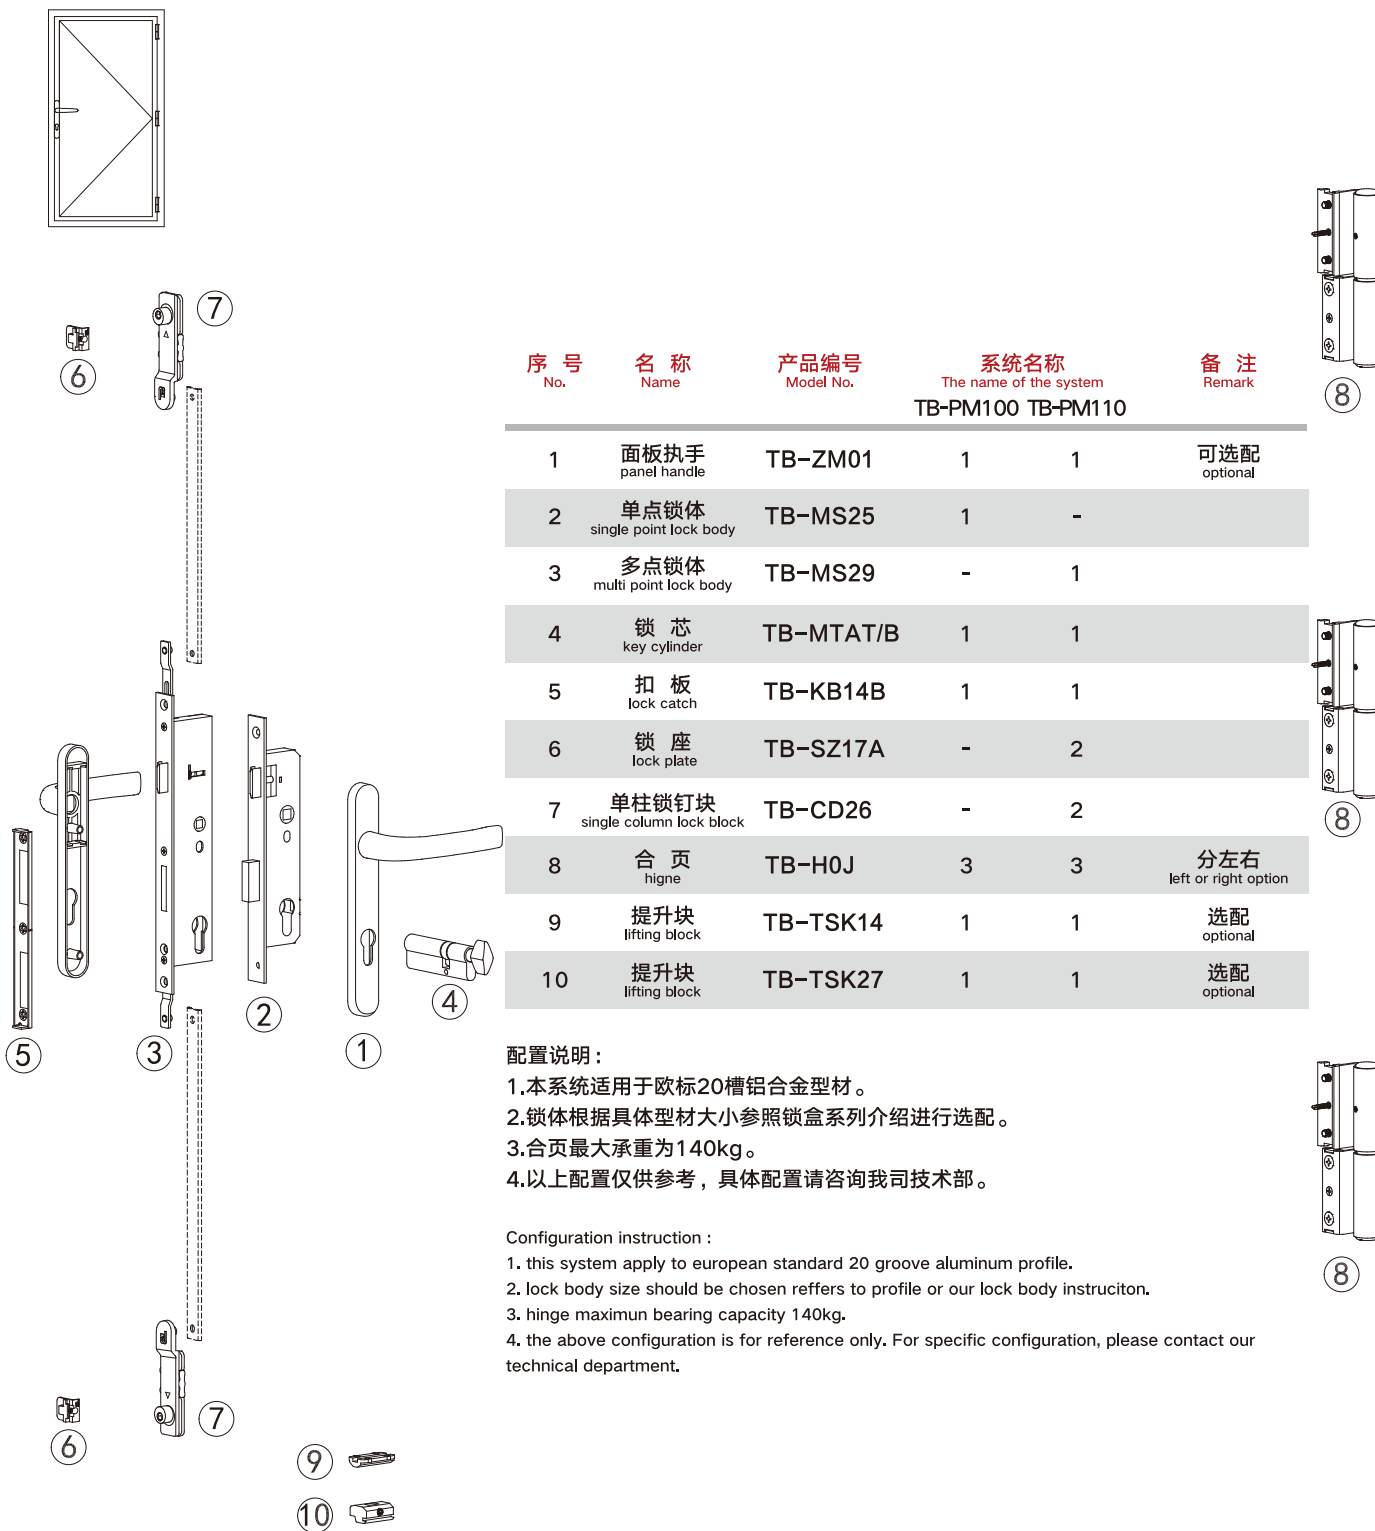

多点锁体安装示意图 multi point lock body installation instruction

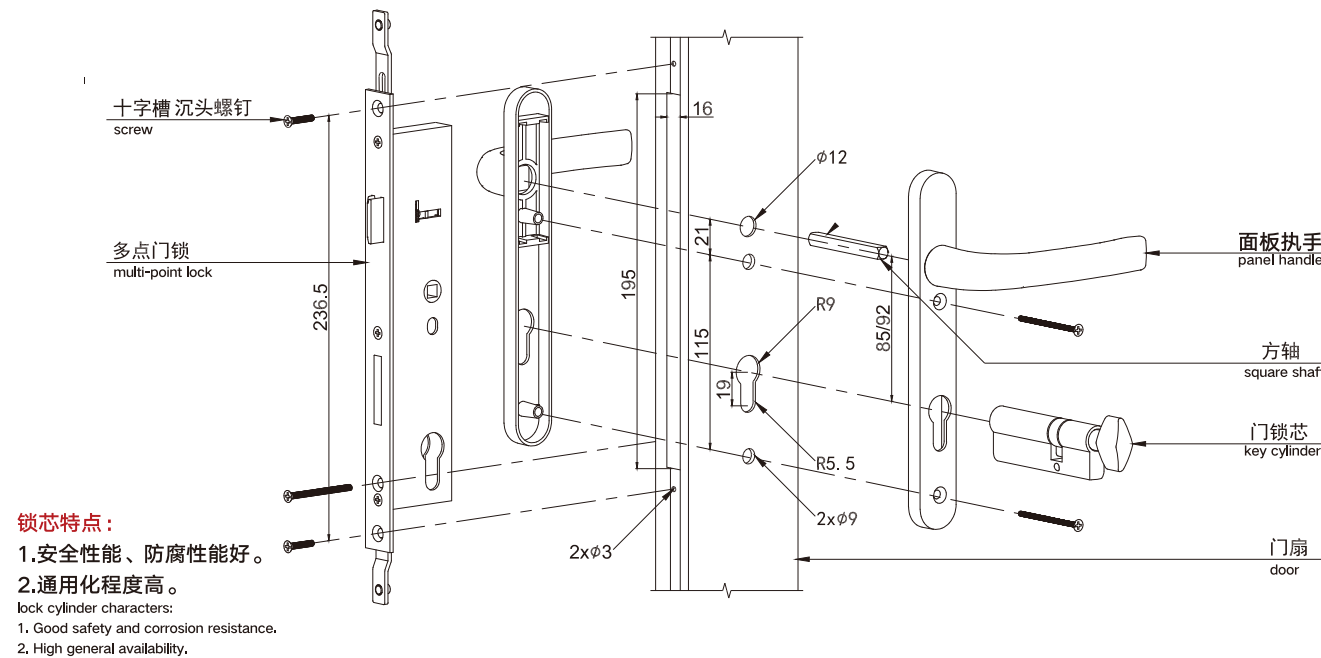

单点锁体（不带锁芯）安装示意图 single point lock body (without key cylinder) installation instruction

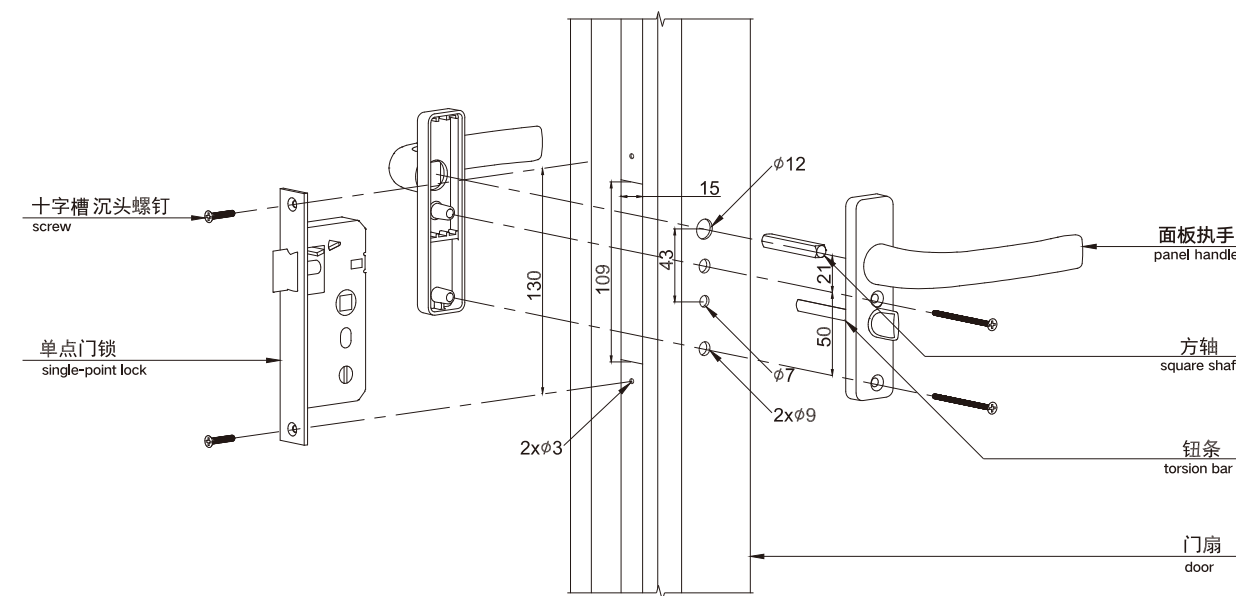

注：1. 建议批量开孔前先进行首样试装。

2. 本安装示意图适用于欧标20槽铝合金型材。

3. 需选用五金件对应的开孔图进行开孔，本示意图仅供参考。

4. 部分配件根据型材的规格进行选配，具体咨询我司技术部。

Note: 1. It is recommended to carry out the first sample test before batch opening.
2. This installation diagram is applicable to European standard 20 groove aluminum alloy profiles.
3. The corresponding orifice drawing of hardware should be selected for orifice opening. This schematic diagram is for reference only.
4. Some parts shall be selected according to the specifications of the profile. For specific configuration, please consult with our technical departmen.

· 面板把手方轴长度=扇料厚度+40MM，面板螺丝=扇料厚度+20MM。

· 锁芯长度=扇料厚度+30MM，具体尺寸选配去咨询我司技术部。

· 锁芯带旋钮一侧安装在室内，起到防盗作用。


· 锁体安装后应与门扇表面保持平齐。

· panel handle square shaft length = door thickness + 40mm, panel screw = door thickness + 20mm.

· lock length = door thickness + 30mm, the specific size is selected to consult our technical department.

· key cylinder with knob should facing indoor when install can play the role of anti-theft.








· lock body should be flush with door surface after installation.



序 号 No.	名 称 Name	产品编号 Model No.	数 量 Quantity	备 注 Remark
1	面板执手 panel handle	TB-ZM11	1	可选配 optional
2	单点锁体 single point lock body	TB-MS25D	1	
3	扣 板 lock catch	TB-KB22	1	
4	合 页 hinge	TB-H015A	3	
5	提升块 lifting block	TB-TSK14	1	选配 optional
6	提升块 lifting block	TB-TSK27	1	选配 optional

配置说明：
1.本系统适用于欧标20槽铝合金型材。
2.锁盒根据型材大小参照锁盒系列介绍进行选配。
3.合页最大承重为90kg。
4.以上配置仅供参考，具体配置请咨询我司技术部。



Configuration instruction:
1. this system apply to european standard 20 groove aluminum profile.
2. lock body size should be chosen reffers to profile or our lock body instrucion.
3. hinge maximun bearing capacity 90kg.
4. the above configuration is for reference only. For specifc configuration, please contact with our technical department.

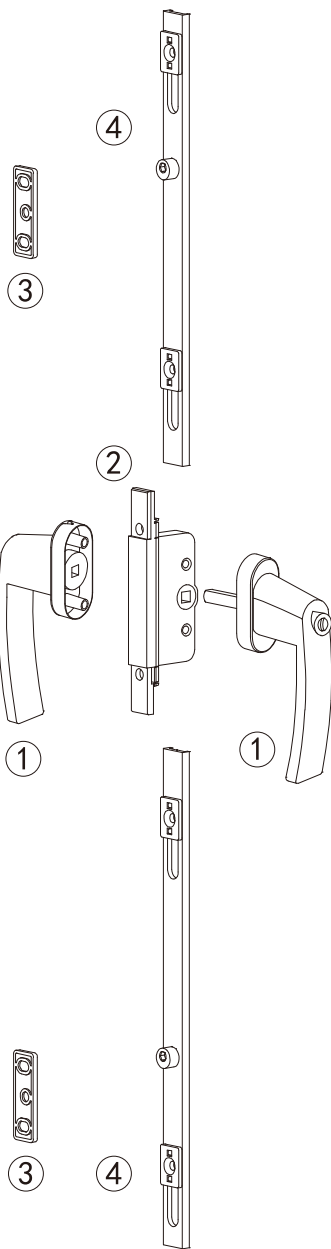



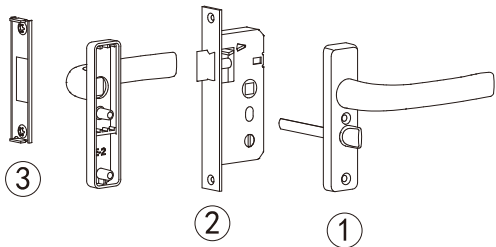


序 号 No.	名 称 Name	产品编号 Product number	数 量 Quantity	备 注 Remark
1	执 手 handle	TB-ZF12	1	可选配 optional
2	传动器 transmission box	TB-CDQ14A	1	
3	锁 座 lock plate	TB-SZ45A	2	
4	传动杆 transmission rod	TB-CDG12	2	
5	合 页 hinge	TB-H023	3	

配置说明：
1.本系统适用于无槽铝合金型材。
2.合页最大承重为50kg。
3.以上配置仅供参考，具体配置请咨询我司技术部。

Configuration instruction:
1. this system apply to slotless aluminum profile.
2. hinge maximun bearing capacity 50kg.
3. the above configuration is for reference only. for specific configuration, please contact with our technical department.














序号 No.	名称 Name	产品编号 Model No.	数量 Quantity	备注 Remark
1	月牙锁 crescent lock	TB-YS01	1	可选配 optional
2	锁钩 lock hook	TB-YG21A	1	
3	滑轮 roller	TB-HLD19	4	可选配 optional
4	防撞块 bumper block	TB-FZK01	4	
5	防盗块 security block	TB-FDK01	1	

配置说明：

- 客户可根据产品列表月牙锁系列选配我司其他类型的月牙锁。
- 滑轮组最大承重可满足单扇40kg。
- 以上配置仅供参考，具体配置请咨询我司技术部。

Configuration instruction:

- customer can choose the other crescent locks according to the list of our crescent lock series.
- roller maximun bearing capacity 40kg /piece.
- the above configuration is for reference only. For specific configuration, please contact with our technical department.

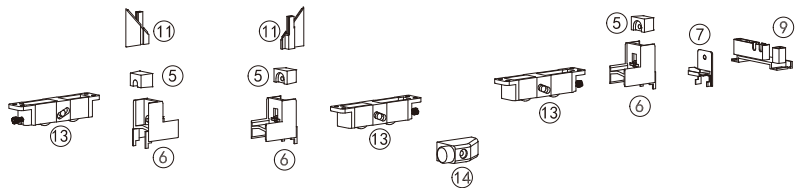



序号 No.	名称 Name	产品编号 Model No.	数量 Quantity	备注 Remark
1	执手 handle	TB-ZB32	2	可选配 optional
2	连接器 connector	TB-95TT-10	2	
3	锁座 lock plate	TB-95TT-20	4	
4	锁扣 lock catch	TB-95TT-11	4	
5	防撞块 bumper block	TB-95TT-16	8	
6	组角块 combination block	TB-95TT-12	8	
7	封盖扣 enclosing cover buckle	TB-95TT-13	4	
8	封口盖（左） enclosing cover (left)	TB-95TT-17	2	
9	封口盖（右） enclosing cover (right)	TB-95TT-18	2	
10	上接角胶片 upper corner connecting rubber mat	TB-95TT-14	2	
11	下接角胶片 lower corner connecting rubber mat	TB-95TT-15	2	
12	防盗块 Security block	TB-95TT-19	1	
13	滑轮 roller	TB-HLS01	4	
14	限位器 limiting stopper	TB-XWQ01	1	

配置说明：

- 客户可根据产品列表执手系列选配我司其他类型的执手。
- 滑轮组最大承重可满足单扇100kg。
- 以上配置仅供参考，具体配置请咨询我司技术部。

Configuration instruction:

- customer can choose the other handle according to the list of our handle series.
- roller maximun bearing capacity 100kg /piece.
- the above configuration is for reference only. For specific configuration, please contact with our technical department.



序号 No.	名称 Name	产品编号 Model No.	数量 Quantity	备注 Remark
1	执手 handle	TB-ZB32	1	可选配 optional
2	传动杆 transmission rod	TB-CDG07T	1	
3	锁座 lock plate	TB-SZ75	2	
4	防撞块 bumper block	TB-FZK01	4	
5	防盗块 security block	TB-FDK01	1	
6	条锁 sliding lock	TB-TS17B	1	可选配 optional
7	锁座 lock point	TB-SZ67A	1	
8	滑轮 roller	TB-HLS01	4	
9	限位器 limiting stopper	TB-XWQ01	1	选配 optional

配置说明：

- 客户可根据产品列表条锁和执手系列选配我司其他类型的条锁和执手。
- 滑轮组最大承重可满足单扇100kg。
- 以上配置仅供参考，具体配置请咨询我司技术部。

Configuration instruction:

- customer can choose the other sliding lock & handle according to the list of our sliding lock & handle series.
- roller maximum bearing capacity 100kg /piece.
- the above configuration is for reference only. For specific configuration, please contact with our technical department.




序号 No.	名称 Name	产品编号 Model No.	数量 Quantity	备注 Remark
1	拉手 Pulling handle	TB-LS51	1	可选配 optional
2	条锁 sliding lock	TB-TS43	1	可选配 optional
3	连接器 connector	TB-TLA01	1	
4	锁座 lock point	TB-TLA03	2	
5	锁钉块 locking block	TB-TLA02	2	
6	防撞块 bumper block	TB-FZK01	4	
7	防盗块 security block	TB-FDK01	1	
8	锁座 lock bracket	TB-SZ75	2	
9	传动杆 transmission rod	TB-CDG12T	2	
10	执手 handle	TB-ZF01	1	
11	传动器 transmission box	TB-CDQ16	1	
12	滑轮 roller	TB-HLS01	4	
13	限位器 limiting stopper	TB-XWQ01	1	

配置说明：

- 客户可根据产品列表条锁和执手系列选配我司其他类型的条锁和执手。
- 滑轮组最大承重100kg。
- 以上配置仅供参考，具体配置请咨询我司技术部。

Configuration instruction:

- customer can choose the other sliding lock & handle according to the list of our sliding lock & handle series.
- roller maximum bearing capacity 100kg /piece.
- the above configuration is for reference only. For specific configuration, please contact with our technical department.

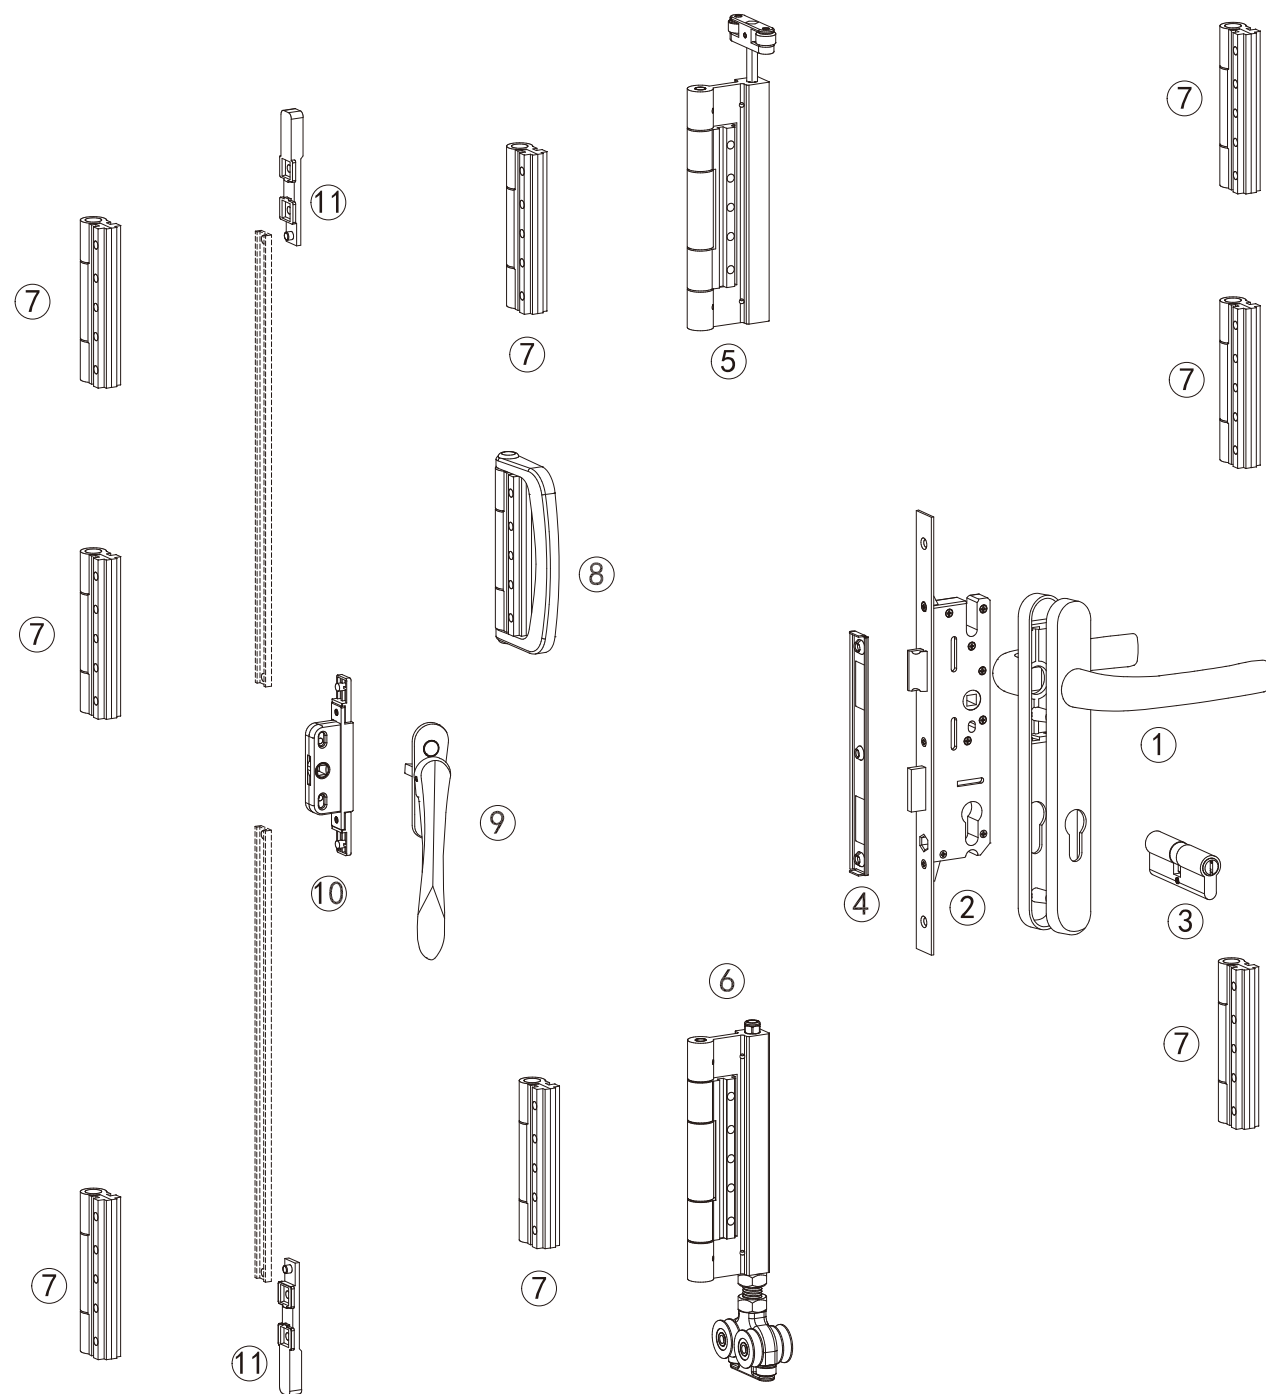

序号 No.	名称 Name	产品编号 Model No.	数量 Quantity						备注 Remark
			330	431	550	651	633	770	
1	面板执手 panel handle	TB-ZM01	1	1	1	1	1	1	可选配 optional
2	单点锁体 single point lock body	TB-MS25	1	1	1	1	1	1	可选配 optional
3	锁芯 lock cylinder	TB-MTA/B	1	1	1	1	1	1	
4	扣板 lock plate	TB-KB14B	1	1	1	1	1	1	
5	上合页系统 upper hinge system	TB-TLZDO1	1	1	2	2	2	3	
6	下合页系统 lower hinge system	TB-TLZDO2	1	1	2	2	2	3	
7	边合页 side hinge	TB-TLZDO3	5	8	7	10	10	9	
8	拉手合页 handle hinges	TB-TLZDO4	1	1	2	2	2	3	
9	执手 handle	TB-ZF19	1	1	2	2	2	3	
10	传动锁盒 transmission box	TB-CDQ14	1	1	2	2	2	3	
11	插销 bolt	TB-CX29	2	2	4	4	4	6	




330



431




550



651



633



770

配置说明：

- 1.客户可根据产品列表面板执手系列选配我司其他面板执手。
- 2.最大承重为单扇100kg。
- 3.适用范围：最大高度2700mm，单扇最宽800mm。
- 4.以上配置仅供参考，具体配置请咨询我司技术部。

Configuration instruction:

1. customer can choose the other panel handle according to the list of our panel handle series.
2. maximum bearing capacity 100kg/ piece.
3. range of application: maximum height: 2700 mm, width 800 mm.
4. the above configuration is for reference only. For specific configuration, please contact with our technical department.




01 执手系列

Handle Series


不断创新和优化，为您带来更优质的生活，是我们一直追求的。
CONTINUOUS INNOVATION AND OPTIMIZATION, TO BRING YOU A BETTER QUALITY OF LIFE, WE HAVE BEEN PURSUING.

TB-ZB01

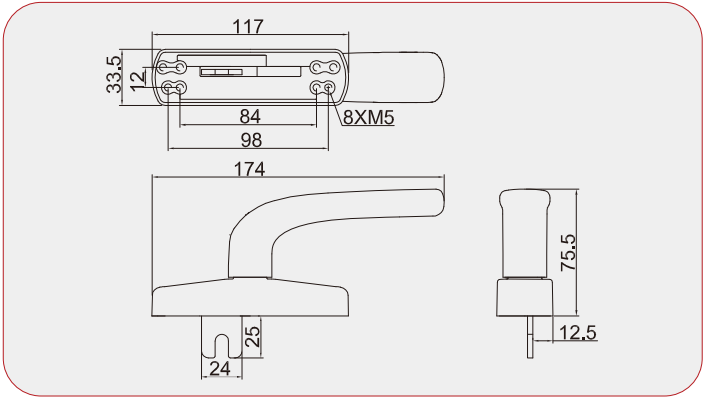


◆内开
● Inward opening.

TB-ZB05

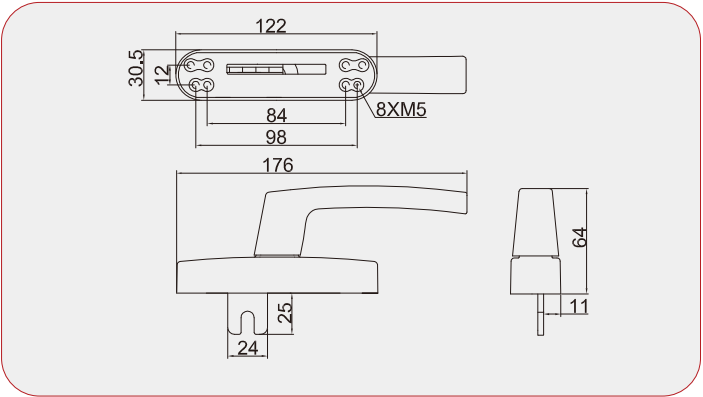


◆内开
● Inward opening.

TB-ZB02

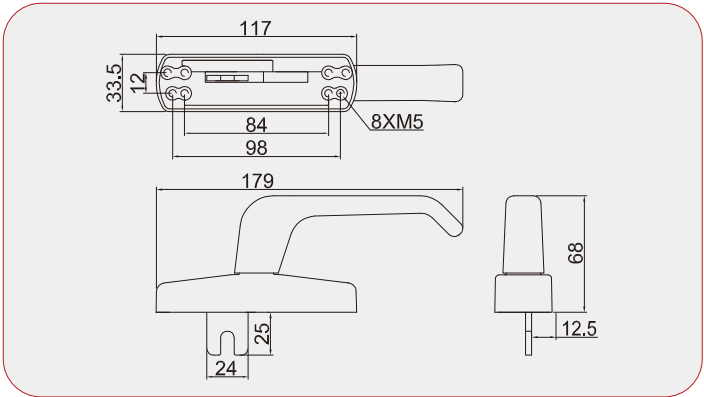


◆内开
● Inward opening.

TB-ZB05B

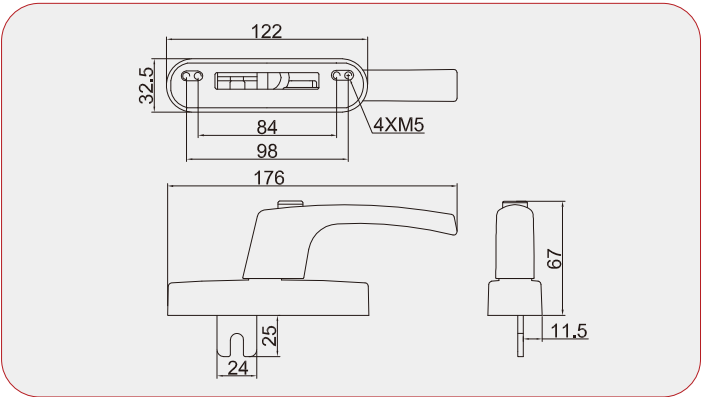


◆内开
● Inward opening.

TB-ZB02D

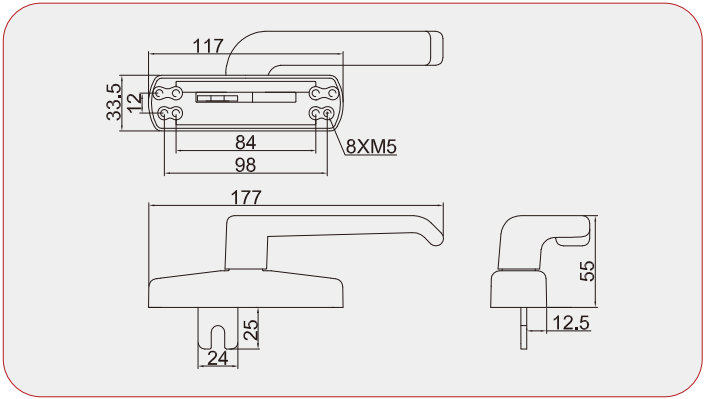


◆内开/上悬，分左右
● Inward opening/top hung, left or right for option.

TB-ZB05C

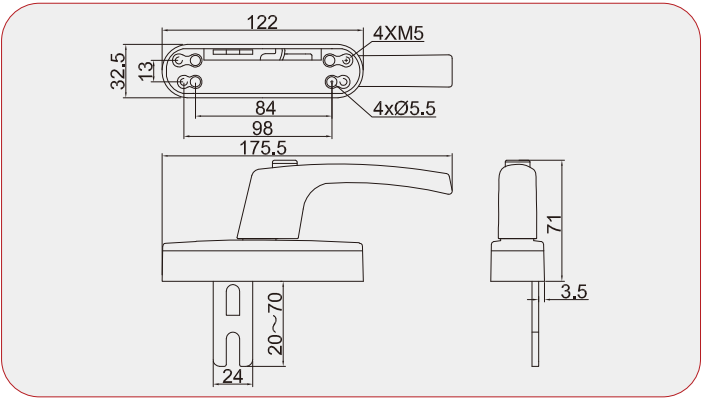


◆外开
● Outward opening.

TB-ZB03A/ZB03B

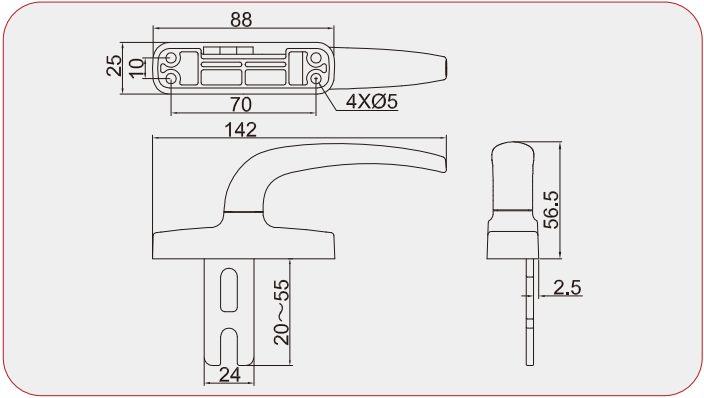


◆外开，ZB03A材质：锌座铝柄,ZB03B材质：铝座铝柄
● Outward opening, ZB03A material: Zinc base, aluminum handleZB03B material: aluminum base and handle.

TB-ZB16

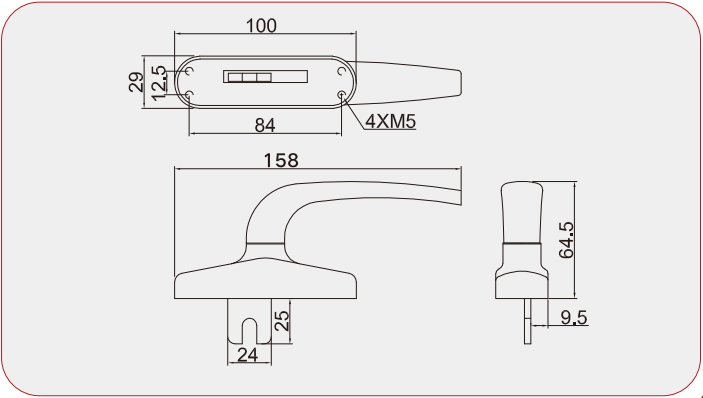


◆内开
● Inward opening.

TB-ZB18A

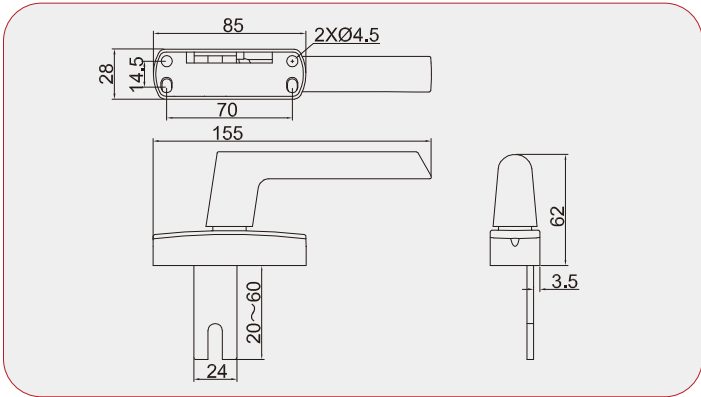


◆外开
● Outward opening.

TB-ZB28C

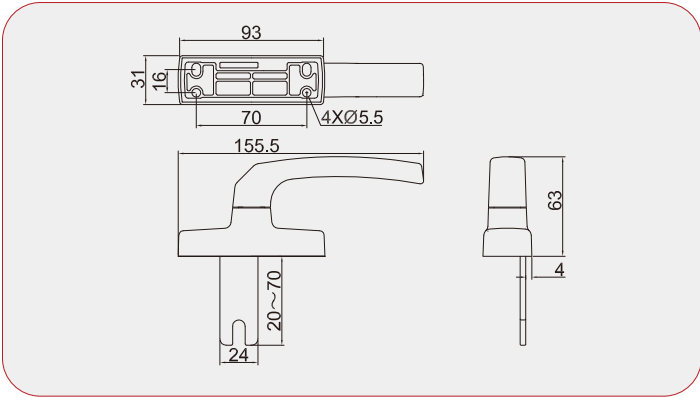


◆外开
● Outward opening.

TB-ZB27

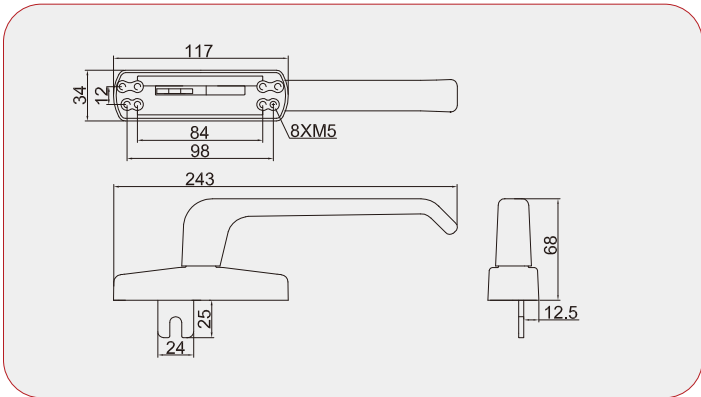


◆内开/推拉
● Inward opening/sliding.

TB-ZB29

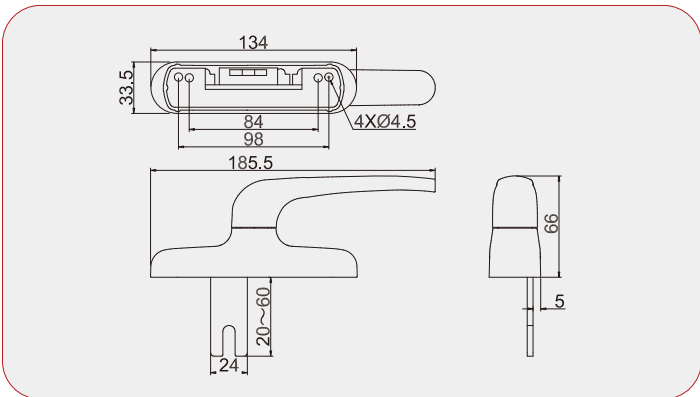


◆外开
● Outward opening.

TB-ZB28B

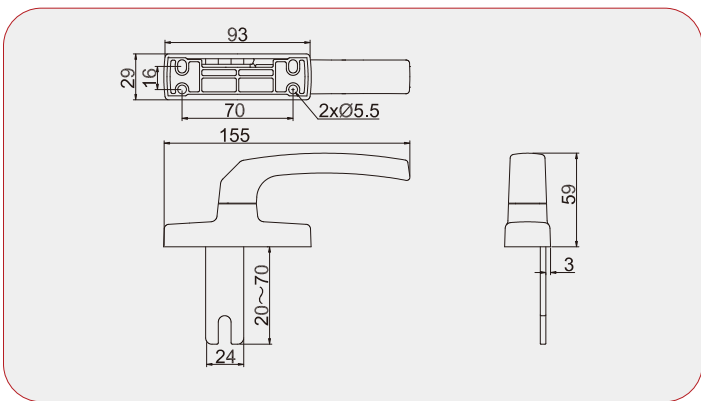


◆外开
● Outward opening.

TB-ZB17A

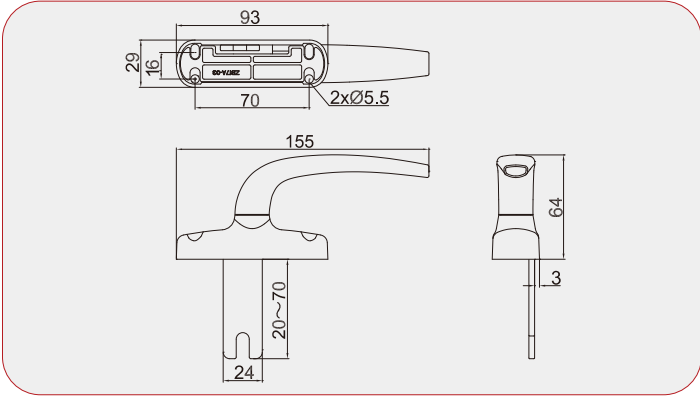


◆外开
● Outward opening.

TB-ZB28N

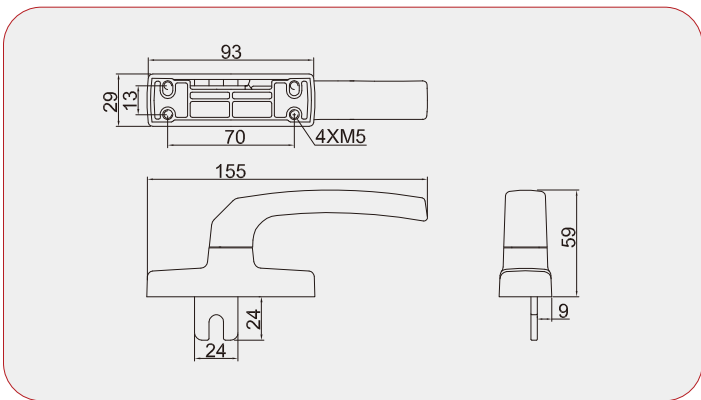


◆内开。
● Inward opening.

TB-ZB32N

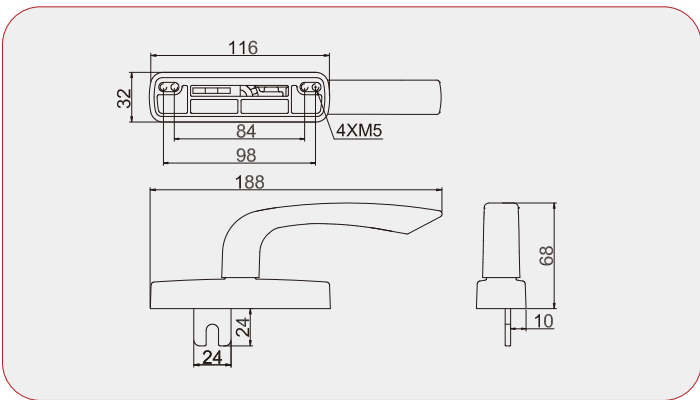


◆内开
● Inward opening.

TB-ZB32

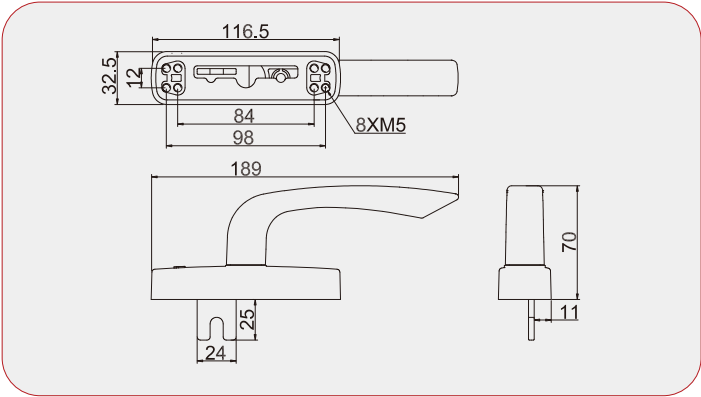


◆内开
● Inward opening.

TB-ZB34

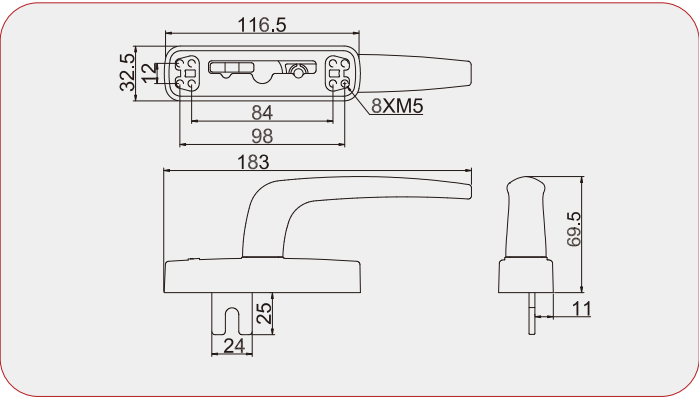


◆内开
● Inward opening.

TB-ZB32A

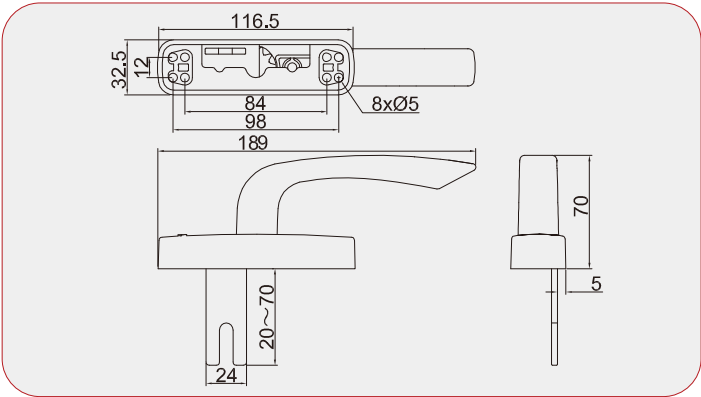


◆外开
● Outward opening.

TB-ZB34A

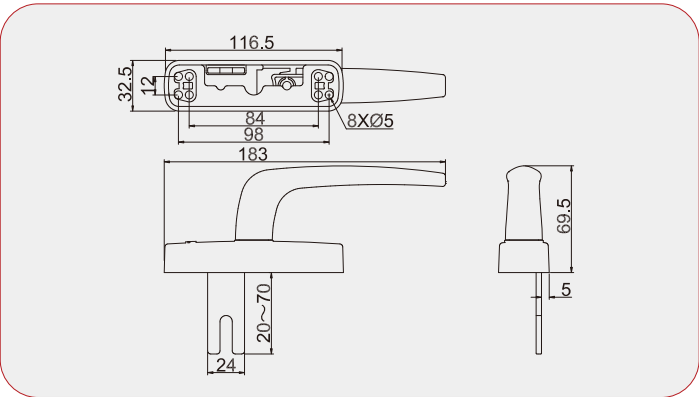


◆外开
● Outward opening.

TB-ZB33N

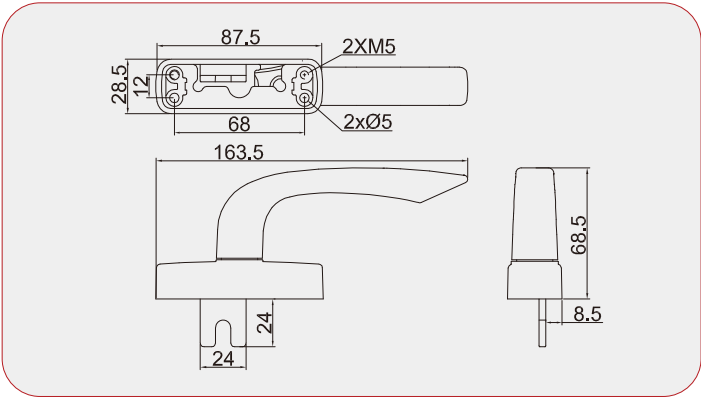


◆内开
● Inward opening.

TB-ZB35N

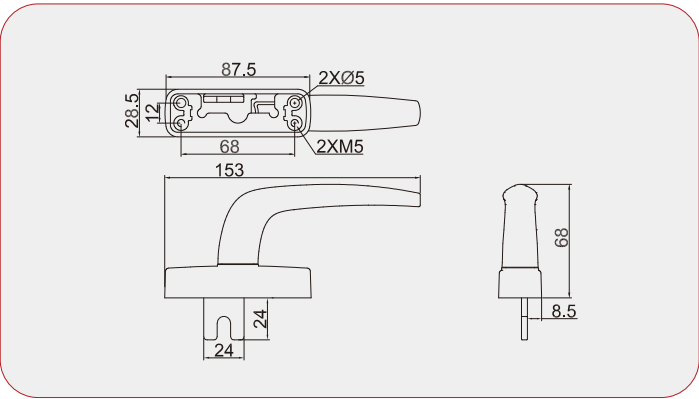


◆内开
● Inward opening.

TB-ZB33C

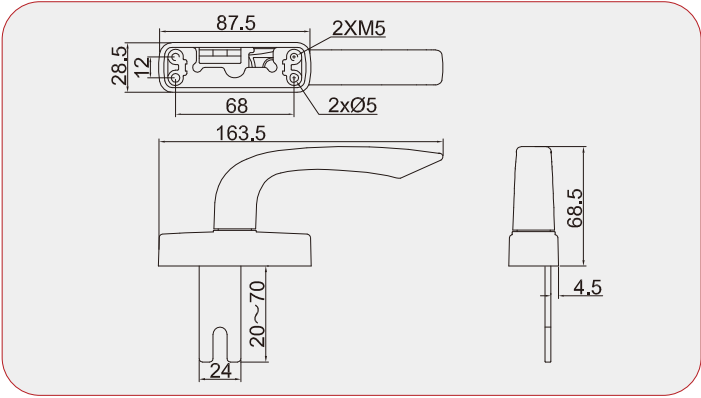


◆外开
● Outward opening.

TB-ZB35C

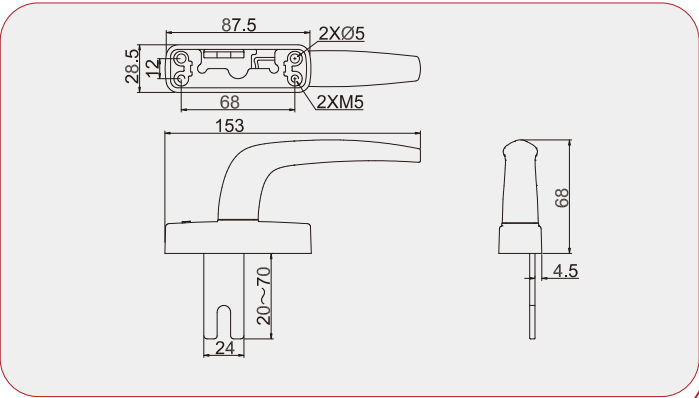


◆外开
● Outward opening.

TB-ZB41

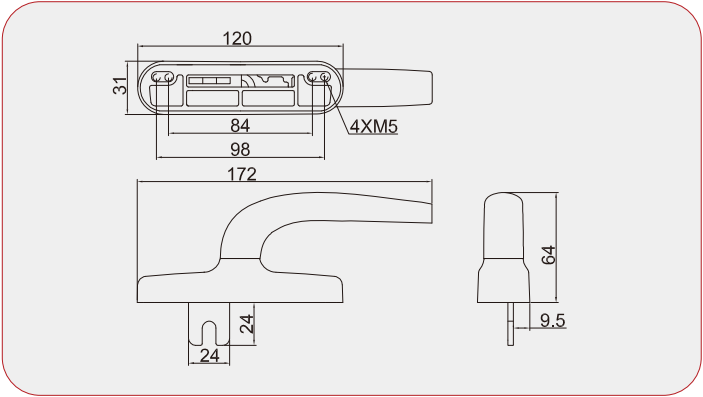


◆内开
● Inward opening.

TB-ZB07A

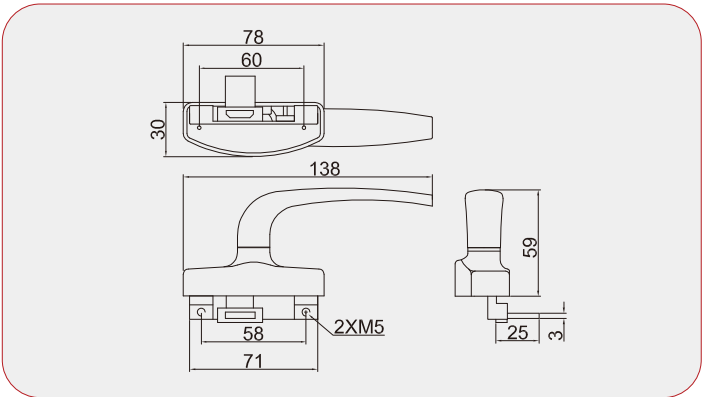

◆分左右，主拨叉最长为14mm，副拨叉的最长为25mm
● Left or right for option,the length of the main fork is 14mm, and the longest length of the secondary fork is 25mm.


TB-ZB07C

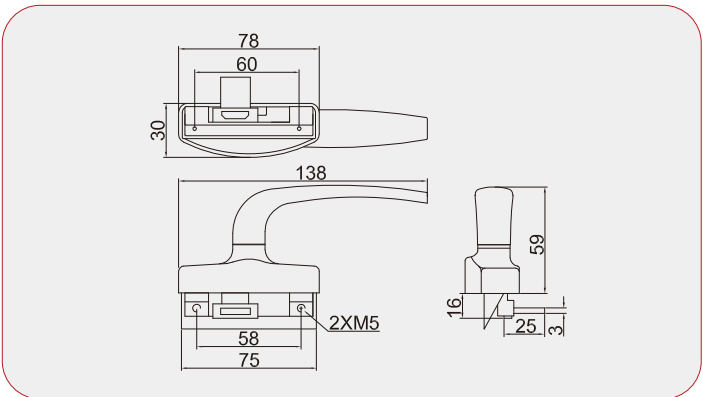


◆分左右，主拨叉最长为14mm，副拨叉的最长为25mm
● Left or right for option,the length of the main fork is 14mm, and the longest length of the secondary fork is 25mm.




TB-ZF01

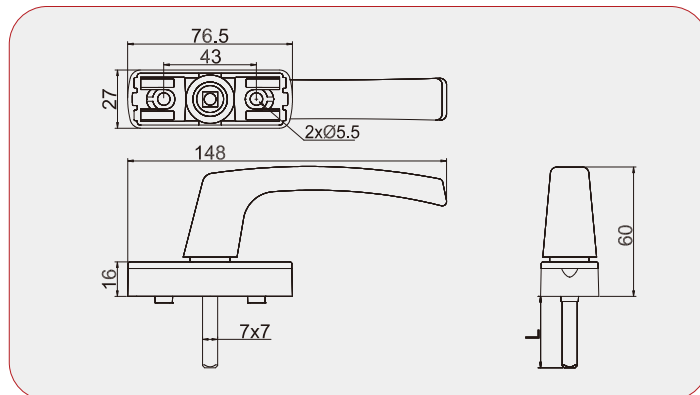


TB-ZF19

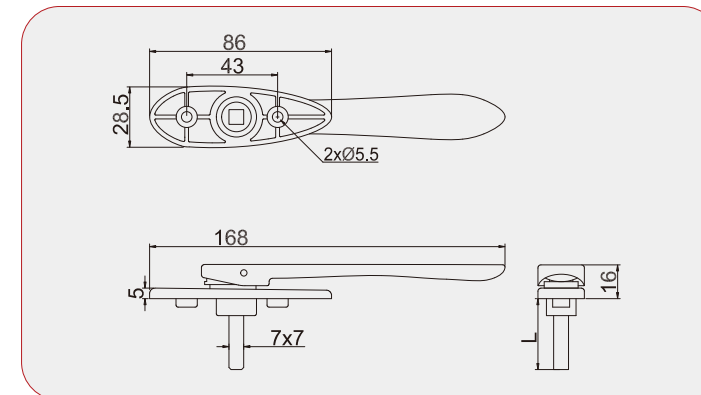


TB-ZF02

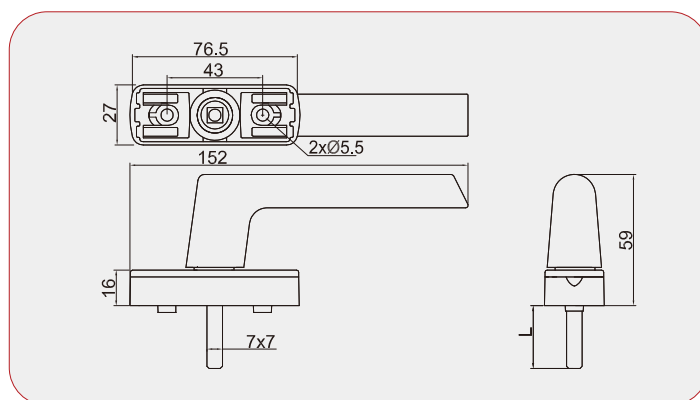


TB-ZF25

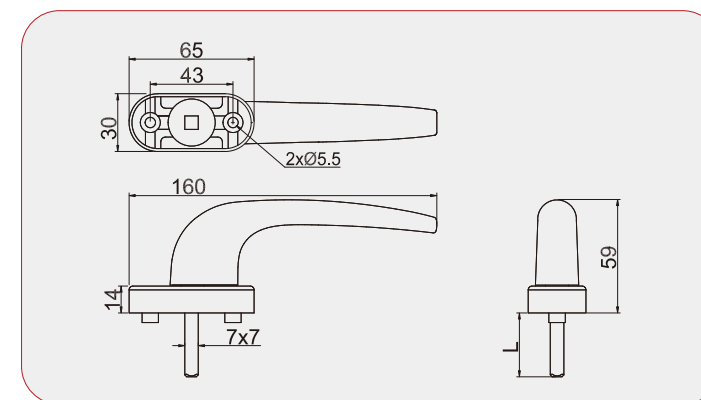


TB-ZF04

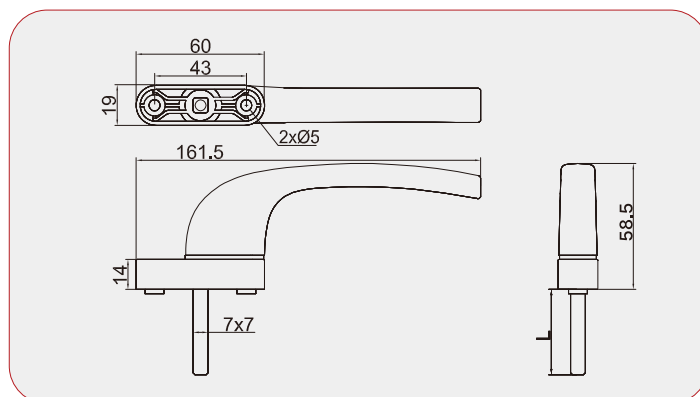


TB-ZF26

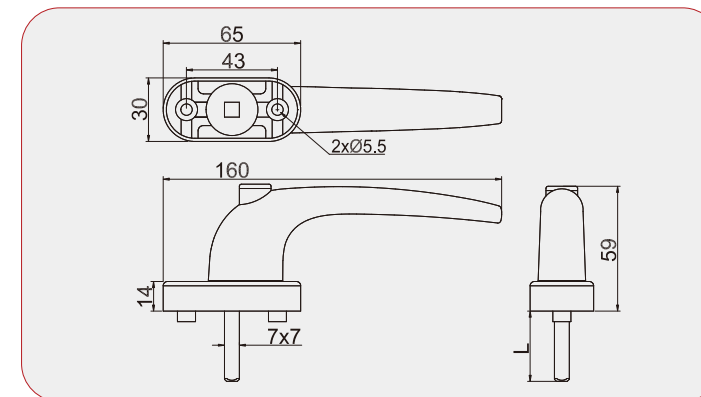


TB-ZF18

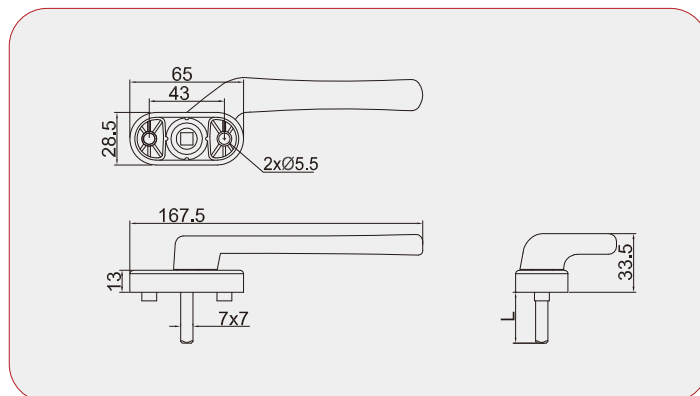


TB-ZF27

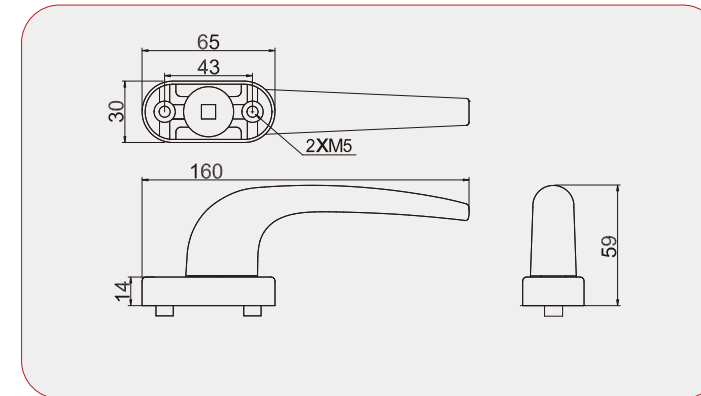

TB-ZF30

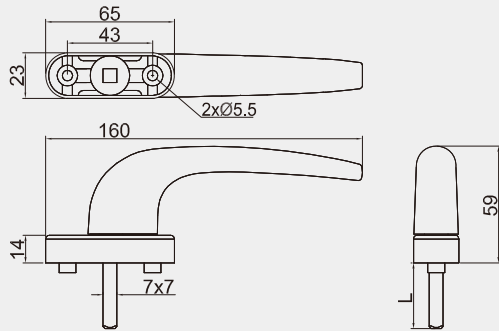


TB-ZQ01

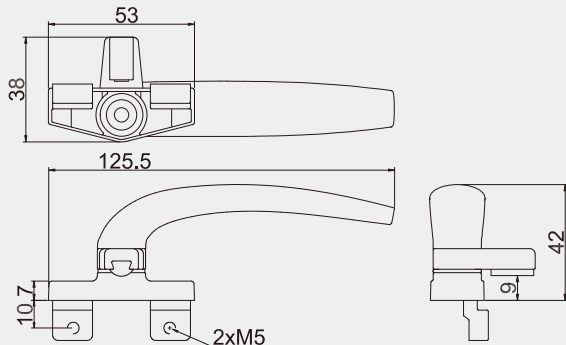


◆分左右
● Left or right for option.

TB-ZF31

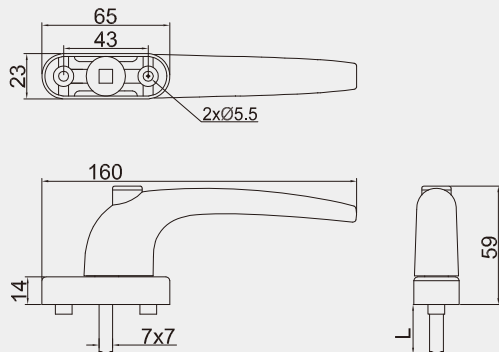


TB-ZQ02

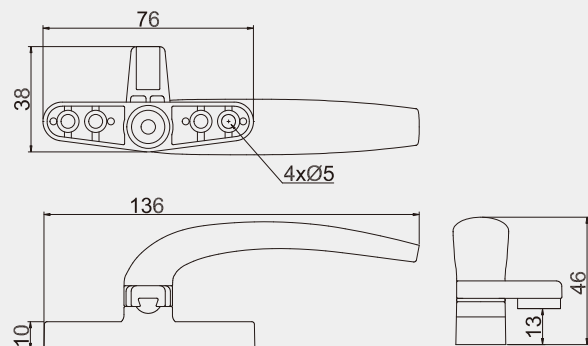


◆分左右
● Left or right for option.

TB-ZF32

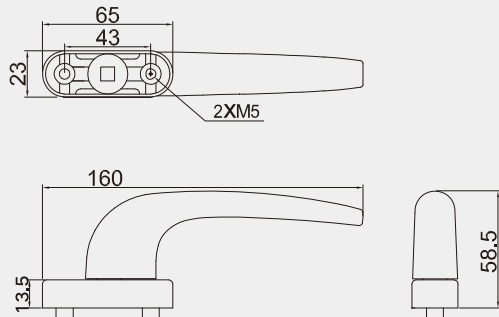


TB-ZQ03

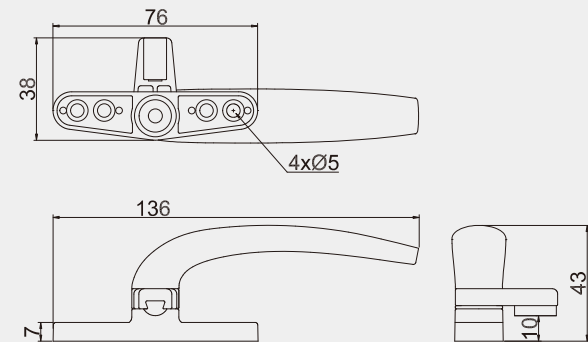


◆分左右
● Left or right for option.

TB-ZF33

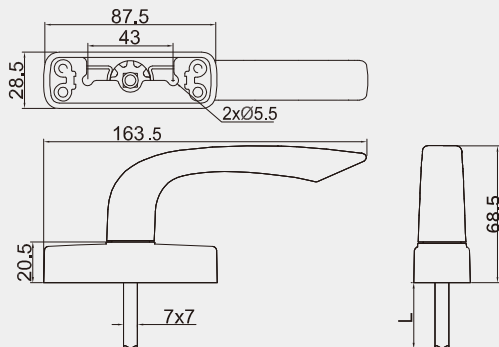


TB-ZQ04

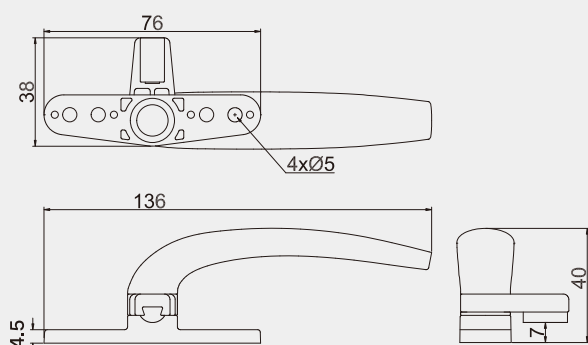


◆分左右
● Left or right for option.

TB-ZM01

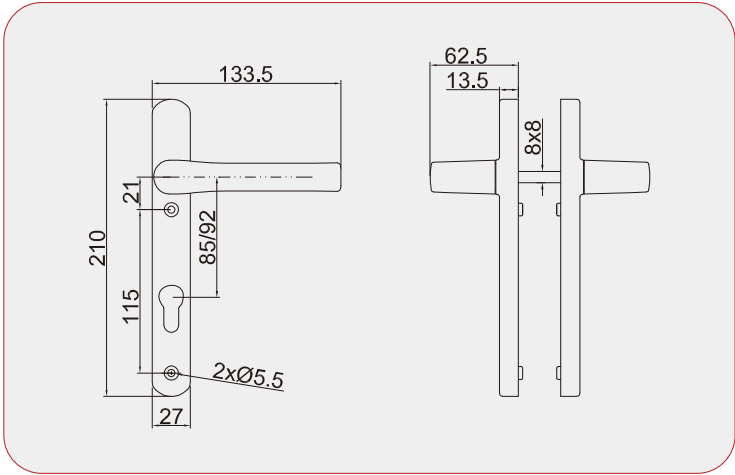


- ◆M5十字槽沉头螺钉长度=型材厚度+20mm
- ◆8*8方轴长度=型材厚度+40mm
- M5 screw length= profile thickness + 20mm,
- 8*8 square shaft length= profile thickness + 40mm,

TB-ZM04

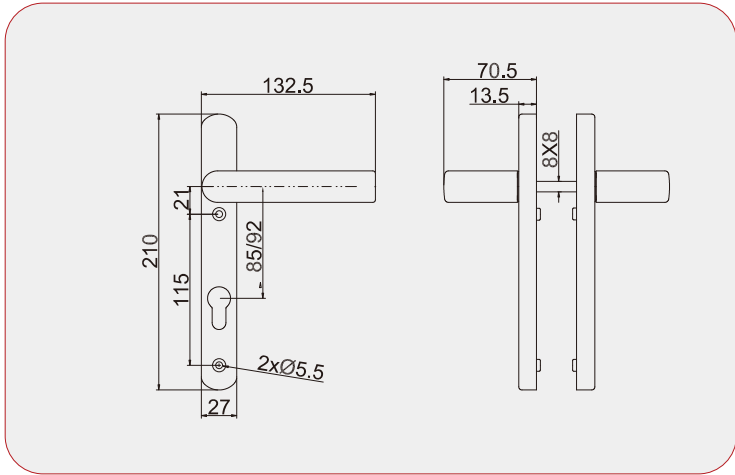


- ◆M5十字槽沉头螺钉长度=型材厚度+20mm
- ◆8*8方轴长度=型材厚度+40mm
- M5 screw length= profile thickness + 20mm,
- 8*8 square shaft length= profile thickness + 40mm,

TB-ZM02

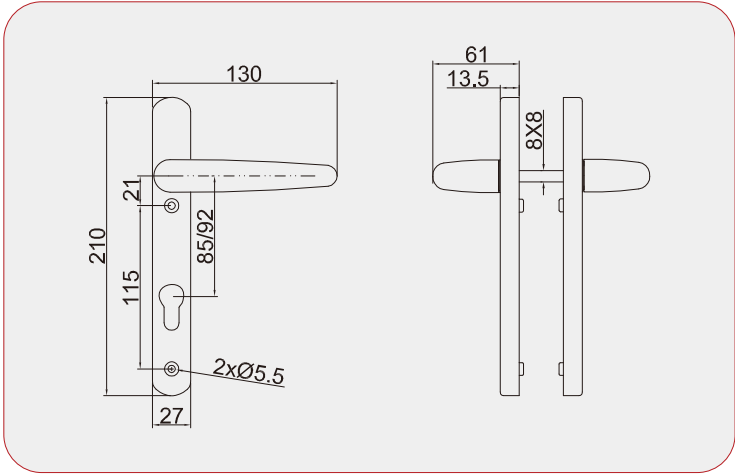


- ◆M5十字槽沉头螺钉长度=型材厚度+20mm
- ◆8*8方轴长度=型材厚度+40mm
- M5 screw length= profile thickness + 20mm,
- 8*8 square shaft length= profile thickness + 40mm,

TB-ZM09

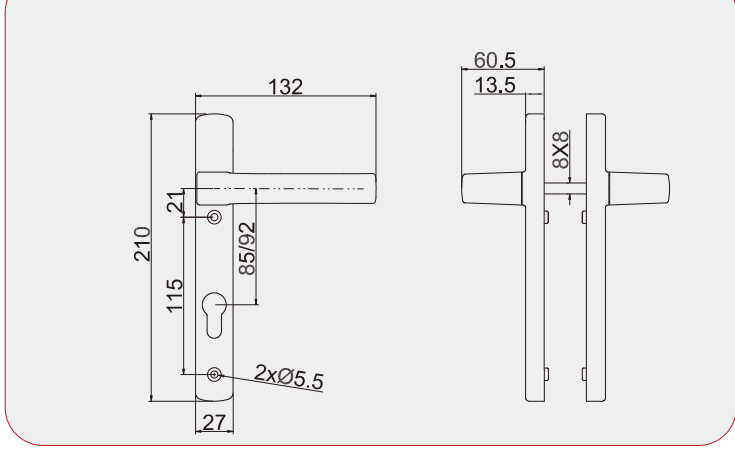


- ◆M5十字槽沉头螺钉长度=型材厚度+20mm
- ◆8*8方轴长度=型材厚度+40mm
- M5 screw length= profile thickness + 20mm,
- 8*8 square shaft length= profile thickness + 40mm,

TB-ZM03

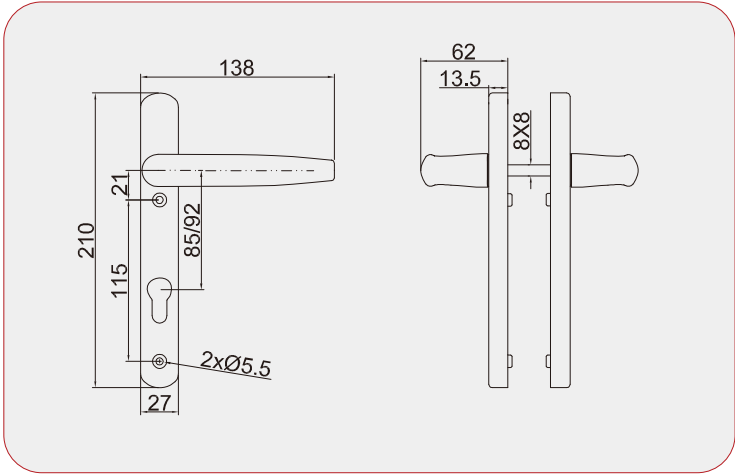


- ◆M5十字槽沉头螺钉长度=型材厚度+20mm
- ◆8*8方轴长度=型材厚度+40mm
- M5 screw length= profile thickness + 20mm,
- 8*8 square shaft length= profile thickness + 40mm,

TB-ZM11

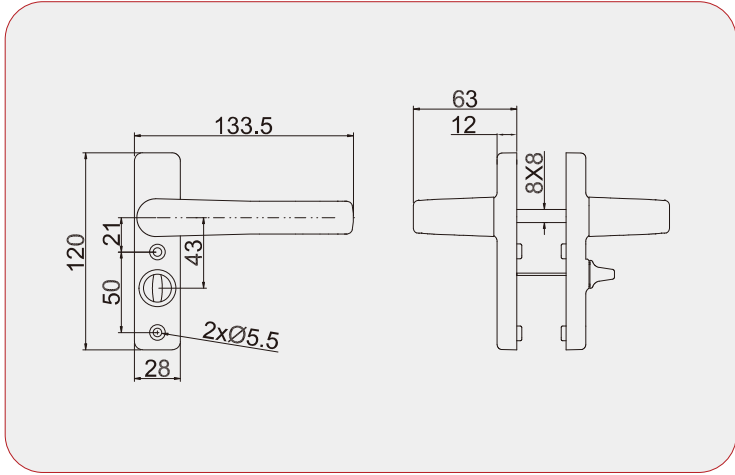


- ◆M5十字槽沉头螺钉长度=型材厚度+20mm
- ◆8*8方轴长度=型材厚度+40mm
- M5 screw length= profile thickness + 20mm,
- 8*8 square shaft length= profile thickness + 40mm,

TB-ZM12

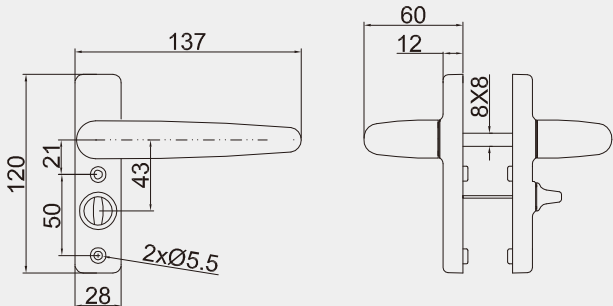


- ◆M5十字槽沉头螺钉长度=型材厚度+20mm
- ◆8*8方轴长度=型材厚度+40mm
- M5 screw length= profile thickness + 20mm,
- 8*8 square shaft length= profile thickness + 40mm,

TB-ZM13

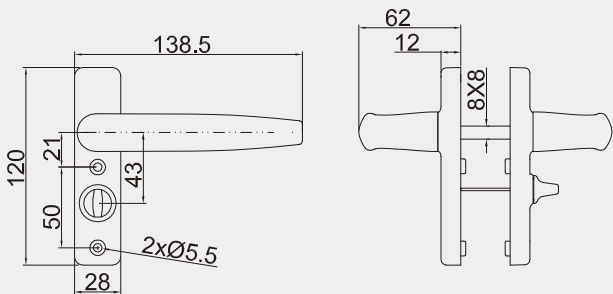


- ◆M5十字槽沉头螺钉长度=型材厚度+20mm
- ◆8*8方轴长度=型材厚度+40mm
- M5 screw length= profile thickness + 20mm,
- 8*8 square shaft length= profile thickness + 40mm,

TB-ZM14

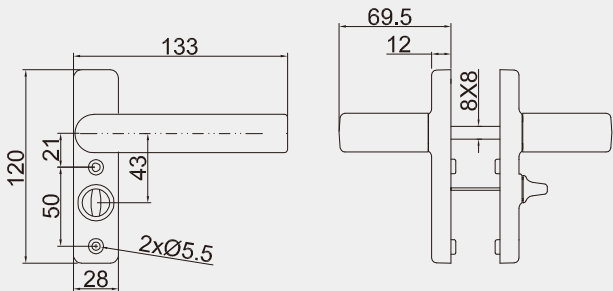


- ◆M5十字槽沉头螺钉长度=型材厚度+20mm
- ◆8*8方轴长度=型材厚度+40mm
- M5 screw length= profile thickness + 20mm,
- 8*8 square shaft length= profile thickness + 40mm,


TB-KB14A

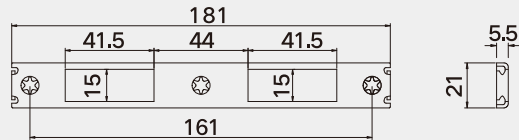


TB-KB14B

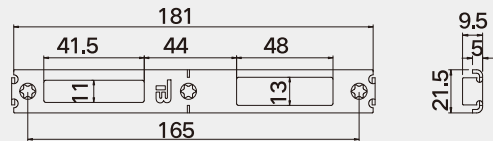


TB-KB16

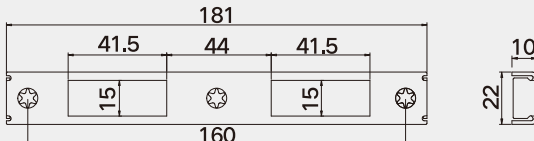


TB-KB22

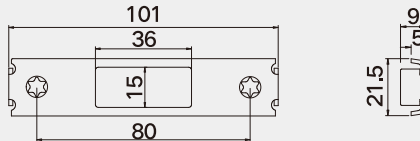


TB-KB22A

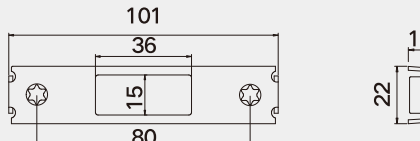


TB-KB23

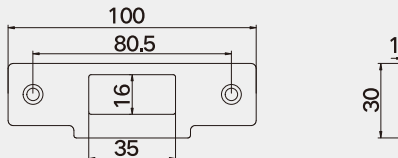

TB-KB25

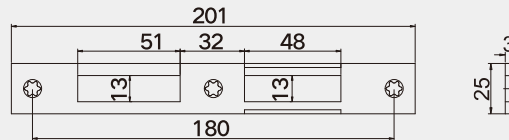

TB-KB26

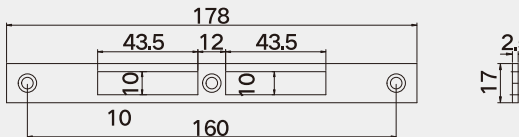

- ◆适用于MS28G门锁
- Apply to MS28G door lock.


单点锁体
Single point lock body




单点锁体
Single point lock body



◆ 不带锁芯
● Without key cylinder.

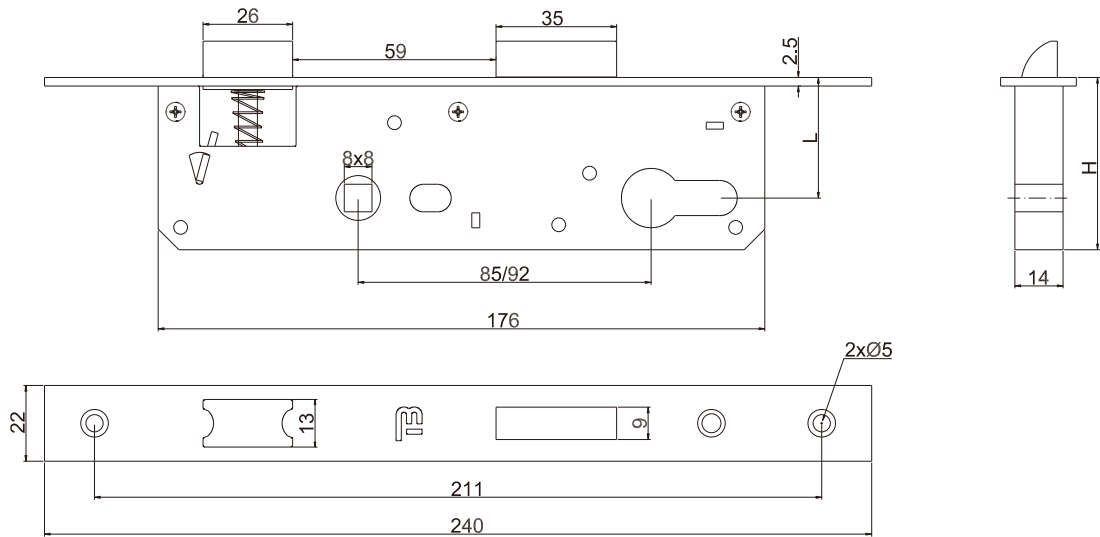

名称 Name	型号 Model	中心距离L (mm) Center distance	宽度H (mm) Wide
单点锁体 single point lock body	TB-MS20	20	35
单点锁体 single point lock body	TB-MS25	25	40
单点锁体 single point lock body	TB-MS27	27	43
单点锁体 single point lock body	TB-MS30	30	45
单点锁体 single point lock body	TB-MS35	35	50


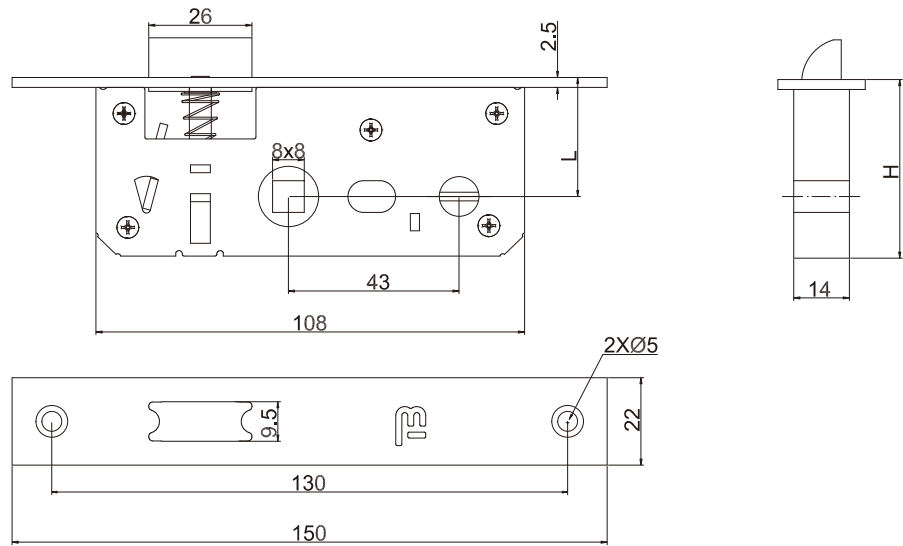


名称 Name	型号 Model	中心距离L (mm) Center distance	宽度H (mm) Wide
单点锁体 single point lock body	TB-MS25D	25	40
单点锁体 single point lock body	TB-MS30D	30	45
单点锁体 single point lock body	TB-MS35D	35	50


多点锁体
Multi- point lock body



TB-MS28G
推拉锁体
Sliding lock body

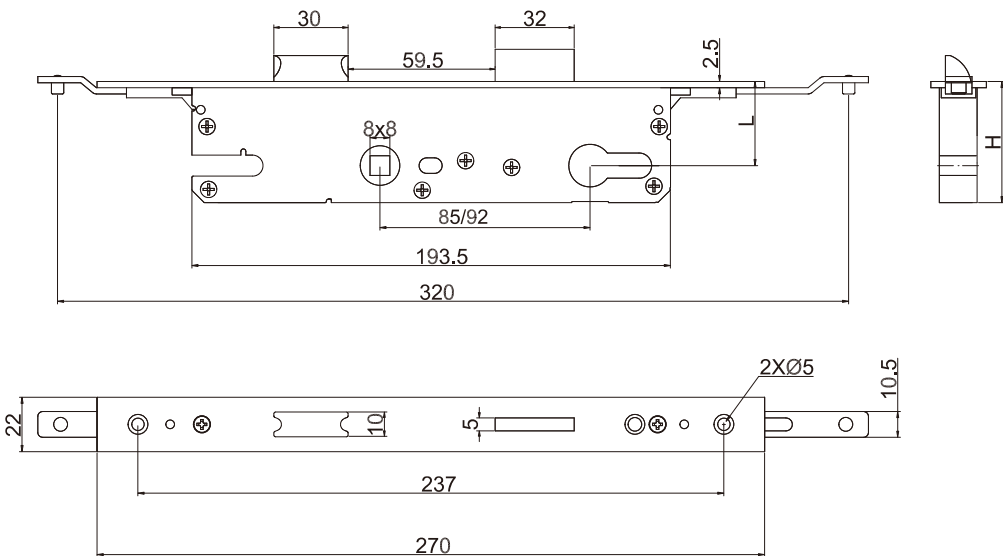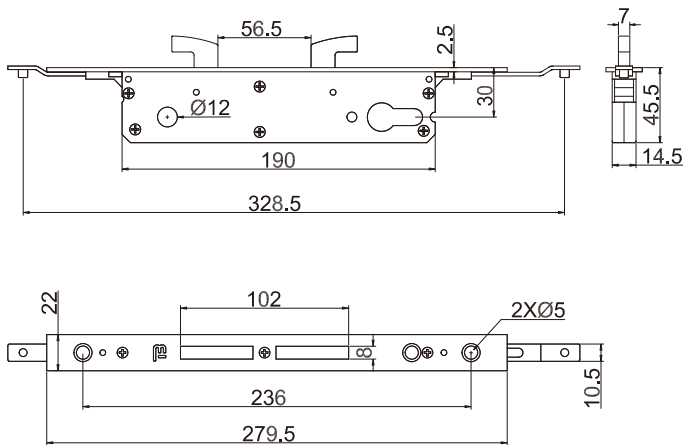

锁芯
key cylinder

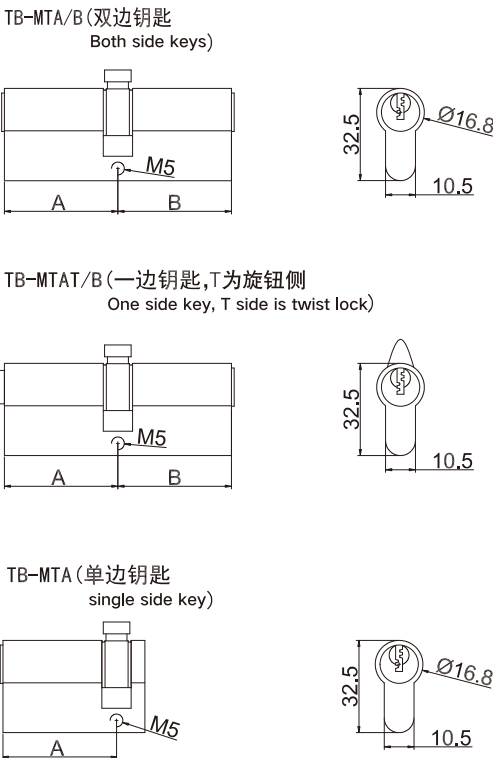


名称 Name	型号 Model	中心距离L (mm) Center distance	宽度H (mm) Wide
多点锁体 Multi-point lock body	TB-MS29	29	44
多点锁体 Multi-point lock body	TB-MS34	34	49

◆根据型材选用
◆锁芯A、B部分会因为铝材内侧空腔的尺寸不同而不同，订购时请注意
◆ Choose according to your profile
◆ Key cylinder part A and part B will be different according to the space of the profile, please pay attention when ordering.

TB-HB



- ◆ 应用于平开窗
- ◆ 选用优质304不锈钢
- ◆ 经3.5万次严格开关测试后仍可正常使用
- ◆ 符合中国建筑业 JG/T 127滑撑的行业标准
- ◆ Apply to casement window.
- ◆ Chosen with high quality 304 stainless steel.
- ◆ After 35000 times strictly aging test can still be used normally.
- ◆ According with China Building industry JG/T 127 friction stay standard.

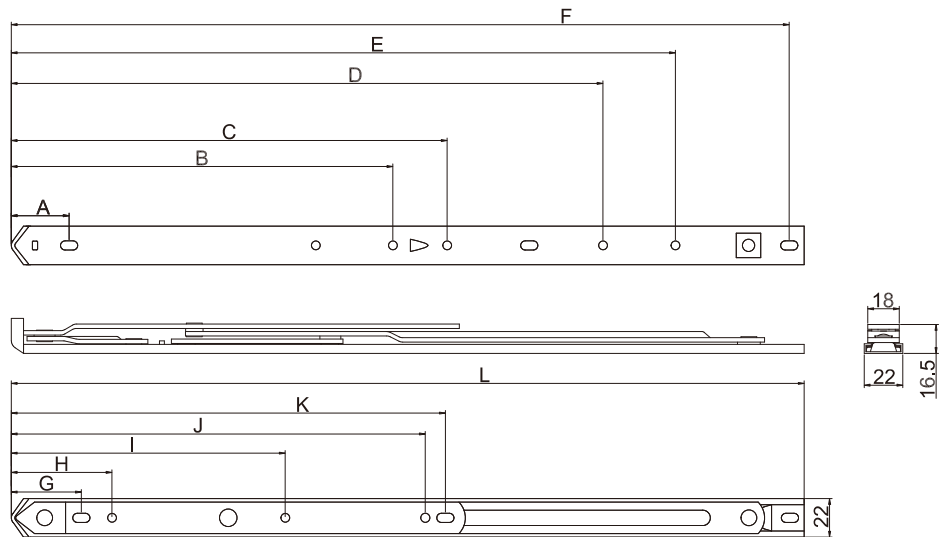


安装尺寸 Installation dimensions												
型号 model	A	B	C	D	E	F	G	H	I	J	K	L
TB-HB08	32	-	-	155	-	199	-	40.5	-	148	160	210
TB-HB10	33	-	-	210	-	254	-	40.5	110	176	188	262
TB-HB12	33	206	-	239	-	297	40	60	114	200	212	305
TB-HB14	33	206	241	285	-	348	40	60	114	214	226	355
TB-HB16	33	216	245	292	-	398	40	60	122	234	246	408
TB-HB18	33	218	249	285	-	445	40	57.5	156	236	248	453
TB-HB22	33	223	245	254	421	557	40	57.5	183	314	326	561

铝窗规格 Aluminium window size			
窗最高 (mm) high	窗最宽 (mm) wide	窗最重 (kg) max bearing capacity	开窗角度 Open Angle
1100	300	22	87 °
1200	400	25	87 °
1400	500	28	87 °
1500	600	32	87 °
1600	700	38	87 °
1700	800	42	85 °
1700	900	45	60 °

TB-HE/HEX



- ◆ 应用于上悬窗
- ◆ 选用优质304不锈钢
- ◆ 经3.5万次严格开关测试后仍可正常使用
- ◆ 符合中国建筑业 JG/T 127滑撑的行业标准
- ◆ Apply to top hung window.
- ◆ Chosen with high quality 304 stainless steel.
- ◆ After 35000 times strictly aging test can still be used normally.
- ◆ According with China Building industry JG/T 127 friction stay standard.

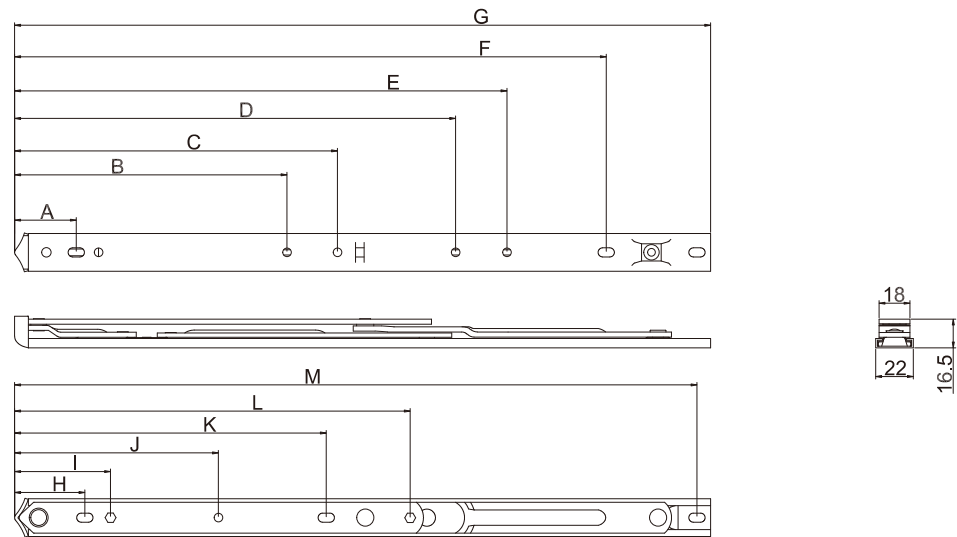


安装尺寸 Installation dimensions												
型号 model	A	B	C	D	E	F	G	H	I	J	K	L
TB-HE10	32	-	-	-	192	-	262	38	-	-	100	144
TB-HE12	32	165	185	-	250	-	303	40	56	-	118	168
TB-HE14	34	146	176	251	281	-	352	40	58	95	155	208
TB-HE16	36	159	188	257	288	345	402	41	56	119	182	231
TB-HEX18	40	187	209	251	388	436.5	445	54	58	121	192	256
TB-HEX24	42	170	188	329	535	592	602	54	56	121	190	346

铝窗规格 Aluminium window size			
窗最高 (mm) high	窗最宽 (mm) wide	窗最重 (kg) max bearing capacity	开窗角度 Open Angle
400	600	30	35 °
600	800	40	35 °
800	1000	50	35 °
1000	1200	60	25/30 °
1400	1400	75	25/30 °
1700	1500	100	15/25 °

TB-HD



- ◆ 应用于平开窗
- ◆ 选用优质304不锈钢
- ◆ 经3.5万次严格开关测试后仍可正常使用
- ◆ 符合中国建筑业 JG/T 127滑撑的行业标准
 - Apply to casement window.
 - Use high-quality 304 stainless steel.
 - After 35,000 times of strict switch test, it can still be used normally.
 - It conforms to the industrial standard of China's construction industry jg/t 127 sliding brace.

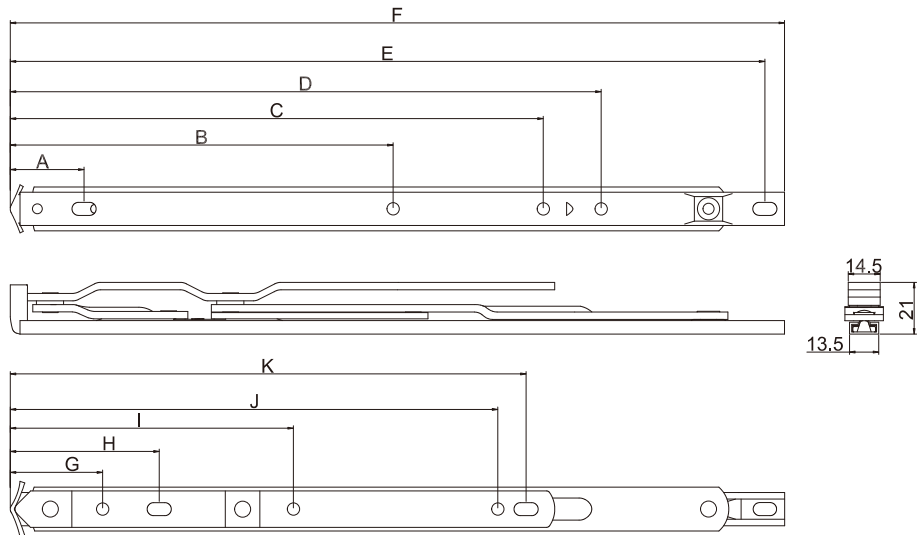


安装尺寸 Installation dimensions											
型号 model	A	B	C	D	E	F	G	H	I	J	K
TB-HD12	30	150	211	236	302	308	37	60	114	197	208
TB-HD14	30	162	236	261	351	357	37	60	135	230	241
TB-HD16	30	260	305	335	391	397	44	69	109	228	239

铝窗规格 Aluminium window size			
窗最高 (mm) high	窗最宽 (mm) wide	窗最重 (kg) max bearing capacity	开窗角度 Open Angle
600	800	17	87 °
1100	500	20	87 °
1200	600	23	87 °

TB-HDE



- ◆ 应用于上悬窗
- ◆ 选用优质304不锈钢
- ◆ 经3.5万次严格开关测试后仍可正常使用
- ◆ 符合中国建筑业 JG/T 127滑撑的行业标准
 - Apply to top hung window.
 - Use high-quality 304 stainless steel.
 - After 35,000 times of strict switch test, it can still be used normally.
 - It conforms to the industrial standard of China's construction industry jg/t 127 sliding brace.

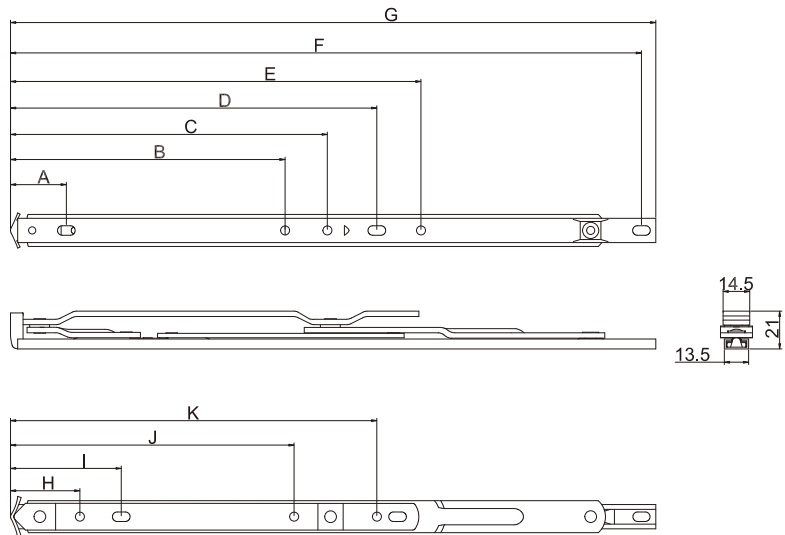

安装尺寸 Installation dimensions											
型号 model	A	B	C	D	E	F	G	H	I	J	K
TB-HDE12	34	150	172	208	237	293	303	34	77	-	155
TB-HDE14	30	148	210	-	267	345	353	34	77	-	194
TB-HDE16	33	152	197	-	263	394	402	45	-	168	234

铝窗规格 Aluminium window size			
窗最高 (mm) high	窗最宽 (mm) wide	窗最重 (kg) max bearing capacity	开窗角度 Open Angle
600	800	25	35 °
800	1000	35	35 °
1000	1200	45	25/35 °

TB-FC01




- ◆ 选用优质304不锈钢
- ◆ 限制窗户打开角度
- ◆ 防止大风损坏窗户
- ◆ 旋钮可定位窗户开启位置
- Chosen with high quality 304 stainless steel.
- Limit the open angle of the window.
- Prevent Windows from being damaged by high winds.
- The rotary knob can locate the open position of the window.


TB-FC03



- ◆ 选用优质304不锈钢
- ◆ 限制窗户打开角度
- ◆ 防止大风损坏窗户
- ◆ 旋钮可定位窗户开启位置
- Chosen with high quality 304 stainless steel.
- Limit the open angle of the window.
- Prevent Windows from being damaged by high winds.
- The rotary knob can locate the open position of the window.

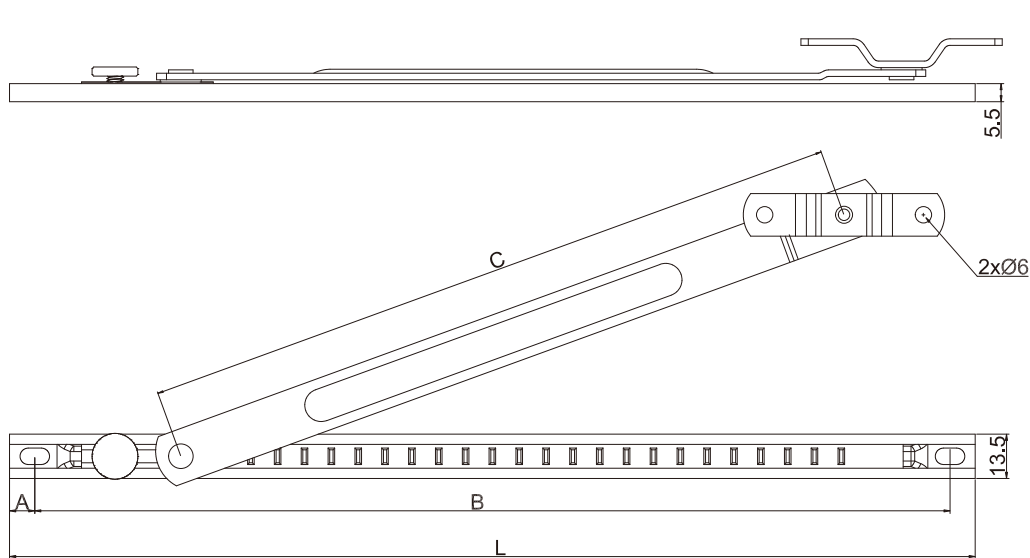

安装尺寸 (单位unit: mm) Installation dimensions					
型号 model	L	A	B	C	H
TB-FC01-08	200	7.5	185	118	13-19
TB-FC01-10	245	7.5	230	170	13-19
TB-FC01-12	295	7.5	280	220	13-19

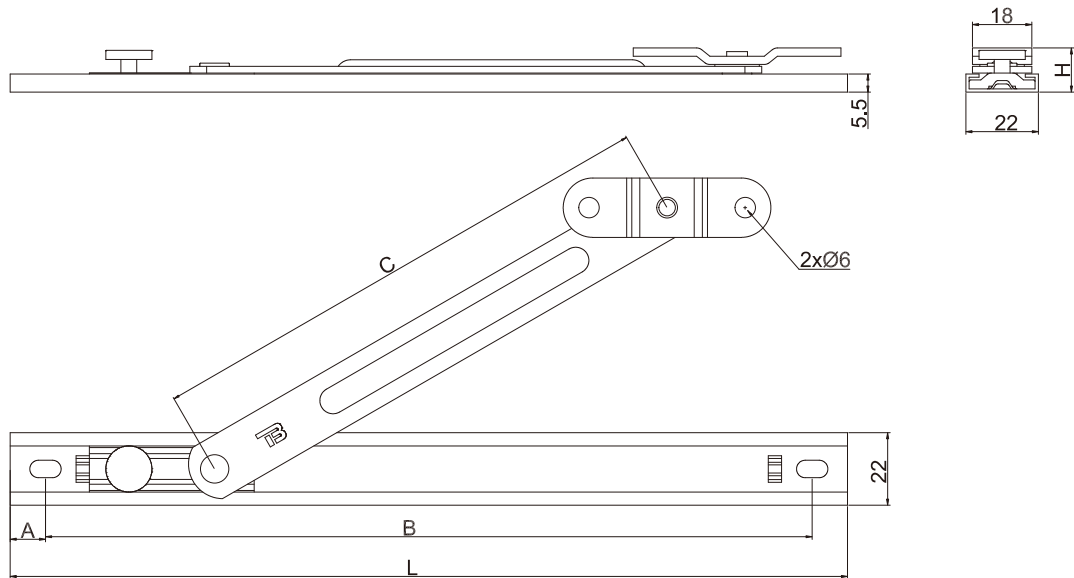


安装尺寸 (单位unit: mm) Installation dimensions					
型号 model	L	A	B	C	H
TB-FC03-10	245	9.5	226	157	13-19
TB-FC03-12	295	9.5	276	212	13-19

TB-FC05



- ◆ 选用优质304不锈钢
- ◆ 限制窗户打开角度
- ◆ 防止大风损坏窗户
- Chosen with high quality 304 stainless steel.
- Limit the open angle of the window.
- Prevent window from being damaged by wind.

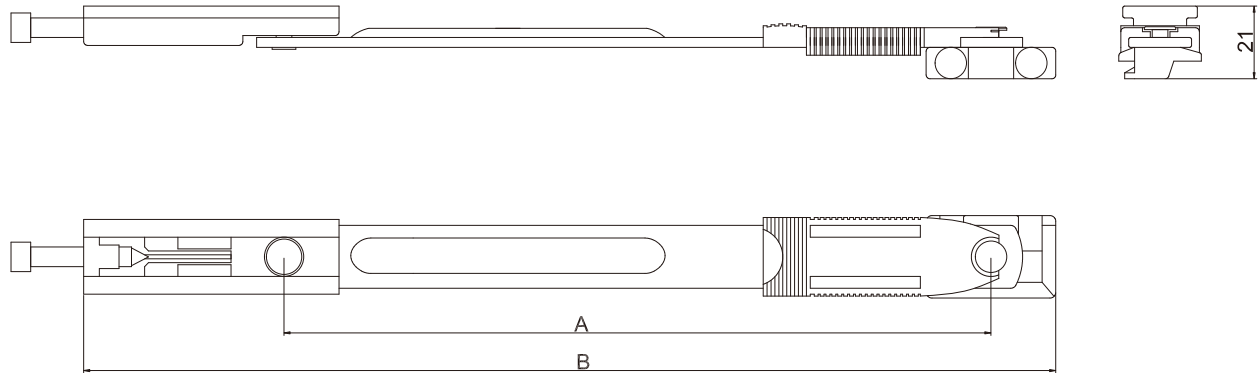


安装尺寸 (单位unit: mm) Installation dimensions			
型号 model	A	B	窗宽 wide
TB-FC05-08	180	248	不少于320
TB-FC05-10	230	298	不少于360
TB-FC05-12	280	348	不少于410

TB-FC06
伸缩风撑
Scale wind brace



- ◆ 选用优质304不锈钢
- ◆ 限制窗户打开角度
- ◆ 防止大风损坏窗户
- Chosen with high quality 304 stainless steel.
- Limit the open angle of the window.
- Prevent window from being damaged by wind.

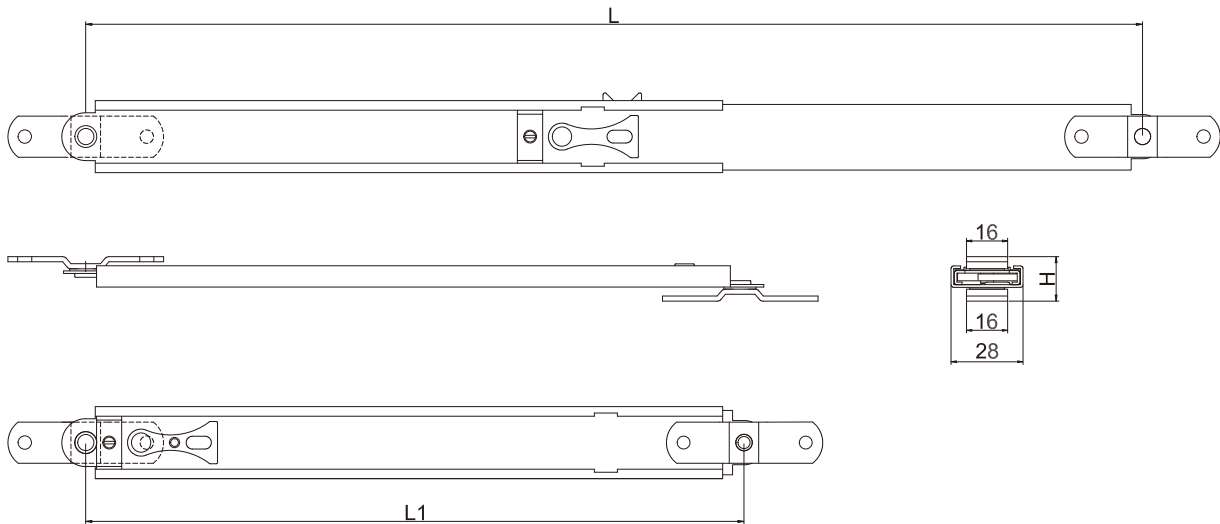

安装尺寸 (单位unit: mm) Installation dimensions			
型号 model	收缩长度L Stretch length	收缩长度L1 Stretch length	高度H Height
TB-FC06-08	311	206	16.5-21
TB-FC06-10	411	256	16.5-21


06 合页系列

Hinge series

让优秀成为习惯，专注技术钻研，建立超前领域。


MAKE EXCELLENCE A HABIT, FOCUS ON TECHNICAL RESEARCH, AND ESTABLISH ADVANCED AREAS.

TB-H0AB

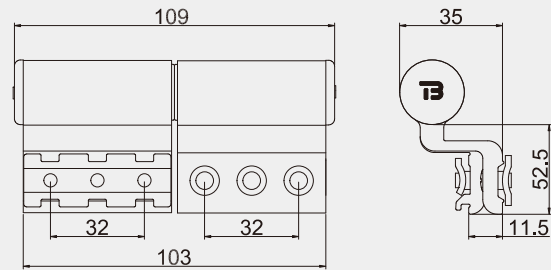


- ◆ 分左右，适用于欧标20槽铝合金平开门
- ◆ 合页最大承重：90kg/组
- Left or right for option, apply to groove 20 European standard aluminum casement door
- Hinge maximum bearing capacity: 90kg/set,

TB-H015B

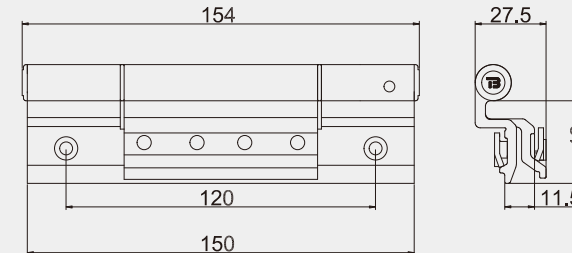


- ◆ 适用于欧标20槽铝合金平开门窗
- ◆ 合页最大承重：120kg/组
- Left or right for option, apply to groove 20 European standard aluminum casement window & door.
- Hinge maximum bearing capacity: 120kg/set,

TB-H0J

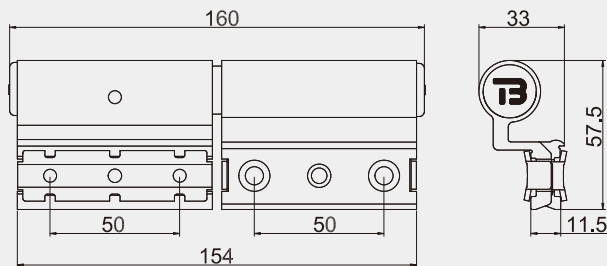


- ◆ 分左右，适用于欧标20槽铝合金平开门
- ◆ 合页最大承重：140kg/组
- ◆ 合页夹紧块在组框前放入
- Left or right for option, apply to groove 20 European standard aluminum casement door.
- Hinge maximum bearing capacity: 140kg/set,
- The hinge clamping block should put in before framing.

TB-H020A

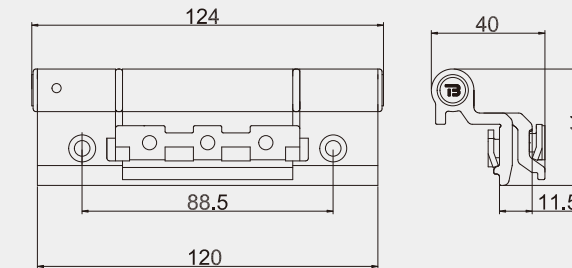


- ◆ 适用于欧标20槽铝合金平开门窗
- ◆ 合页最大承重：100kg/组
- Left or right for option, apply to groove 20 European standard aluminum casement window & door.
- Hinge maximum bearing capacity: 100kg/set,

TB-H0JA

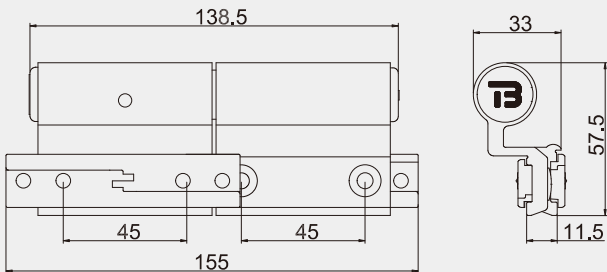


- ◆ 分左右，适用于欧标20槽铝合金平开门
- ◆ 合页最大承重：100kg/组
- Left or right for option, apply to groove 20 European standard aluminum casement door.
- Hinge maximum bearing capacity: 100kg/set,

TB-H010

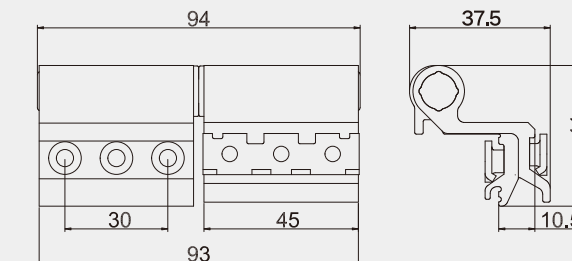


- ◆ 分左右，适用于欧标20槽铝合金平开窗
- ◆ 合页最大承重：40kg/组
- Left or right for option, apply to groove 20 European standard aluminum casement window.
- Hinge maximum bearing capacity: 40kg/set,

TB-H015A

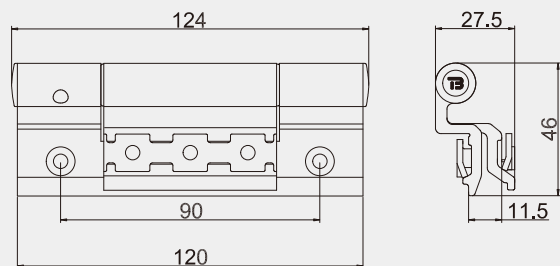


- ◆ 适用于欧标20槽铝合金平开门窗
- ◆ 合页最大承重：90kg/组
- Left or right for option, apply to groove 20 European standard aluminum casement window & door.
- Hinge maximum bearing capacity: 90kg/set,

TB-H010C

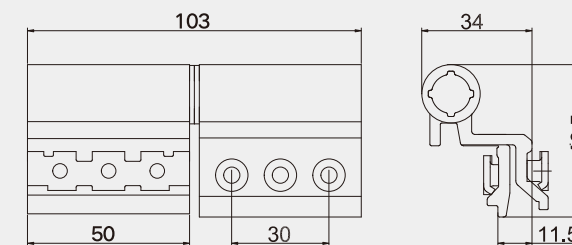

- ◆ 分左右，适用于欧标20槽铝合金平开窗
- ◆ 合页最大承重：60kg/组
- Left or right for option, apply to groove 20 European standard aluminum casement window.
- Hinge maximum bearing capacity: 60kg/set,

TB-H013A

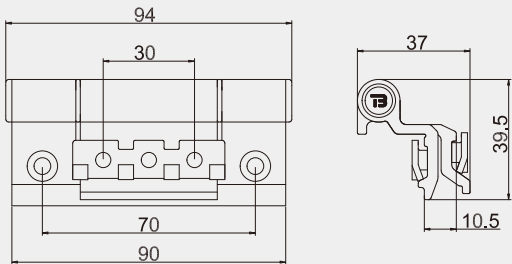


- ◆ 适用于欧标20槽铝合金平开窗
- ◆ 合页最大承重：55kg/组
- Apply to groove 20 European standard aluminum casement window.
- Hinge maximum bearing capacity: 55kg/set.


TB-H070B



- ◆ 分左右，适用于70平开门
- ◆ 合页最大承重：40kg/组
- Left or right for option, Applicable to 70 casement door.
- Maximum bearing capacity of hinge: 40kg/ group.

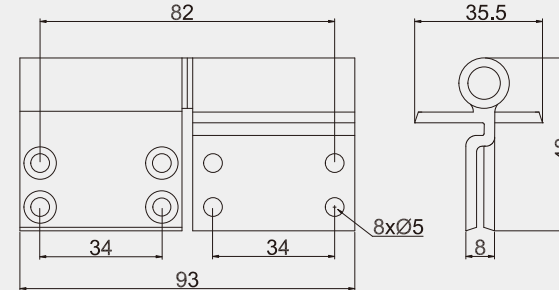

TB-H015

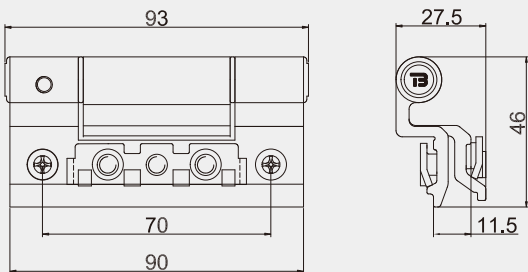


- ◆ 适用于欧标20槽铝合金平开窗
- ◆ 合页最大承重：55kg/组
- Apply to groove 20 European standard aluminum casement window.
- Hinge maximum bearing capacity: 55kg/set.


TB-H070D



- ◆ 适用于70平开门
- ◆ 合页最大承重：40kg/组
- Applicable to 70 casement door.
- Maximum bearing capacity of hinge: 40kg/ group.

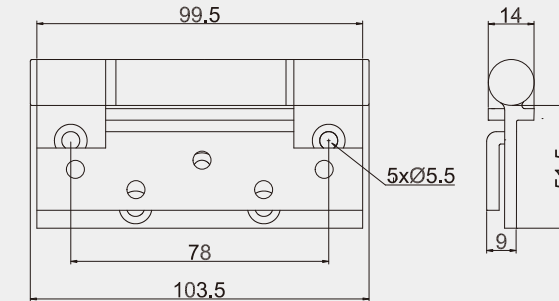

TB-H016

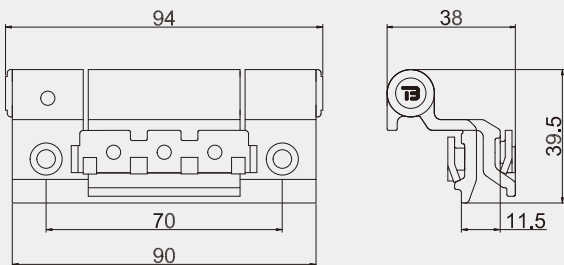


- ◆ 适用于欧标20槽铝合金平开窗
- ◆ 合页最大承重：55kg/组
- Apply to groove 20 European standard aluminum casement window.
- Hinge maximum bearing capacity: 55kg/set.


TB-H001



- ◆ 适用于欧标20槽铝合金平开门窗
- ◆ 合页最大承重：100kg/组
- ◆ 材质是304不锈钢。
- Apply to groove 20 European standard aluminum casement window & door.
- Maximum bearing capacity of hinge: 100kg/ group.
- The material is 304 stainless steel.

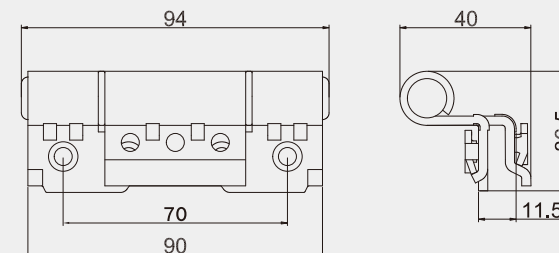

TB-H020

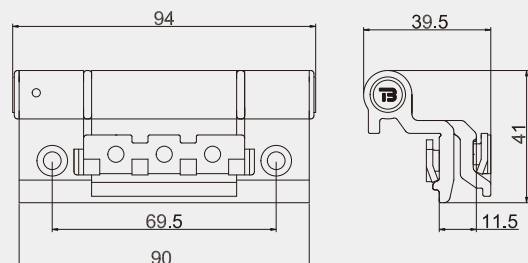


- ◆ 适用于欧标20槽铝合金平开窗
- ◆ 合页最大承重：70kg/组
- Applicable to European standard 20 groove aluminum casement window.
- Hinge maximum bearing capacity: 70kg/set.


TB-H001A



- ◆ 适用于欧标20槽铝合金平开门窗
- ◆ 合页最大承重：100kg/组
- ◆ 材质是304不锈钢。
- Apply to groove 20 European standard aluminum casement window & door.
- Maximum bearing capacity of hinge: 100kg/ group.
- The material is 304 stainless steel.

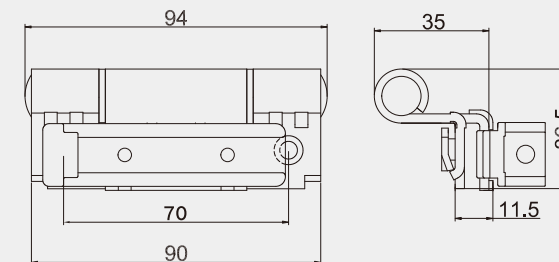


TB-H002

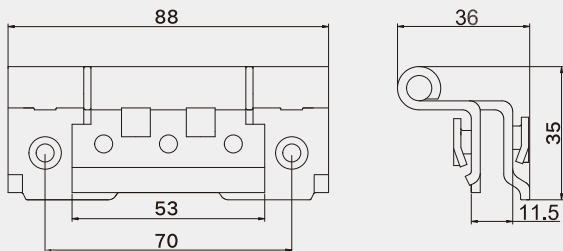


- ◆ 适用于欧标20槽铝合金平开门窗
- ◆ 合页最大承重：50kg/组
- ◆ 材质是304不锈钢
- Apply to groove 20 European standard aluminum casement window & door.
- Maximum bearing capacity of hinge: 50kg/ group.
- The material is 304 stainless steel.

TB-YH03

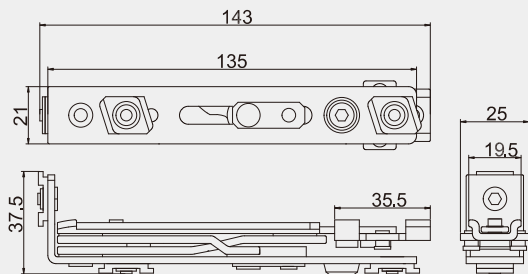


- ◆ 适用于欧标20槽铝合金平开门窗
- ◆ 隐藏式铰链最大承重：50kg/组
- ◆ 材质是304不锈钢
- Apply to groove 21 European standard aluminum casement window & door.
- Maximum bearing capacity of hidden type hinge: 50kg/group.
- The material is 304 stainless steel.

TB-YH04

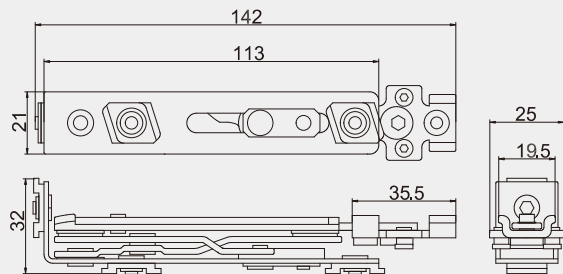

- ◆ 适用于欧标20槽铝合金平开门窗
- ◆ 隐藏式铰链最大承重：30kg/组
- ◆ 材质是304不锈钢
- Apply to groove 22 European standard aluminum casement window & door.
- Maximum bearing capacity of hidden type hinge: 30kg/group.
- The material is 304 stainless steel.


TB-YH08

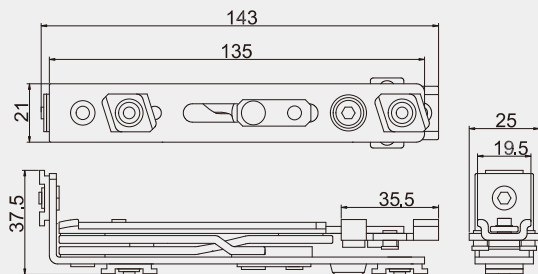


- ◆ 适用于欧标20槽铝合金平开门窗
- ◆ 隐藏式铰链最大承重：40kg/组
- ◆ 材质是304不锈钢
- Apply to groove 23 European standard aluminum casement window & door.
- Maximum bearing capacity of hidden type hinge: 40kg/group.
- The material is 304 stainless steel.




TB-CDQ13
单向传动器
Single way transmission box

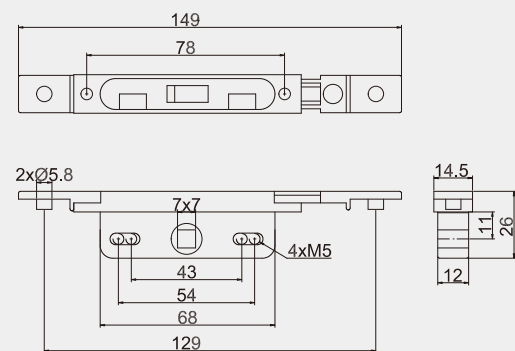


TB-CDQ16
单向传动器
Single way transmission box

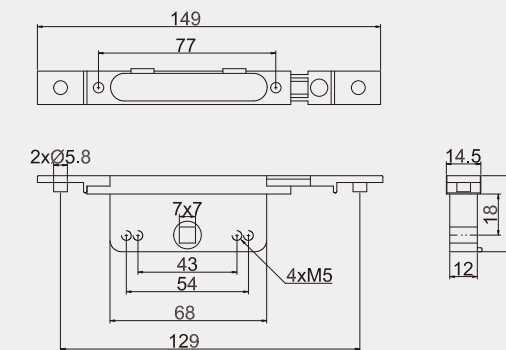


TB-CDQ14
双向传动器
Double way transmission box

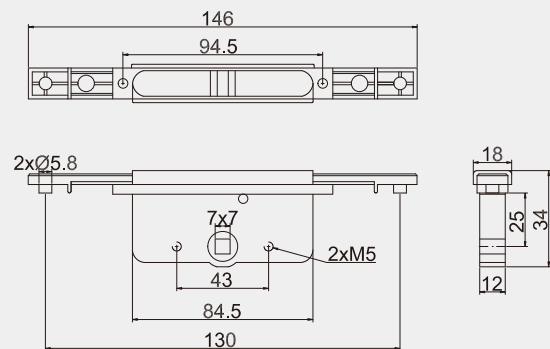


TB-CDQ17
单向传动器
Single way transmission box

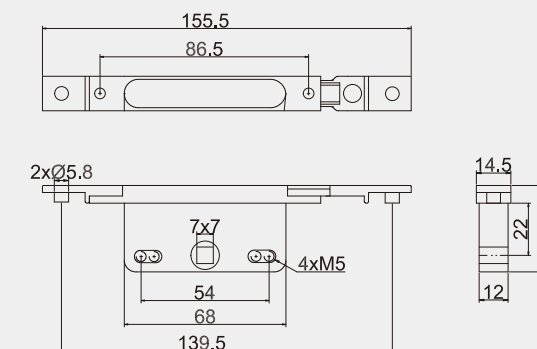


TB-CDQ15
带锁芯传动器
Transmission box with key cylinder

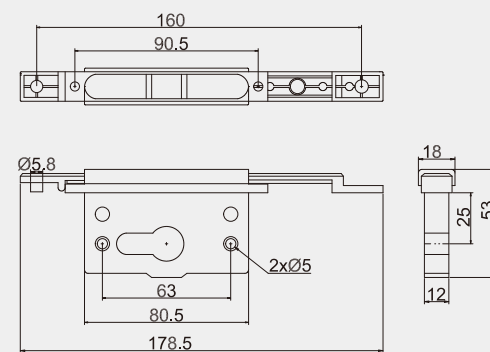


TB-CDQ20
双向传动器
Double way transmission box

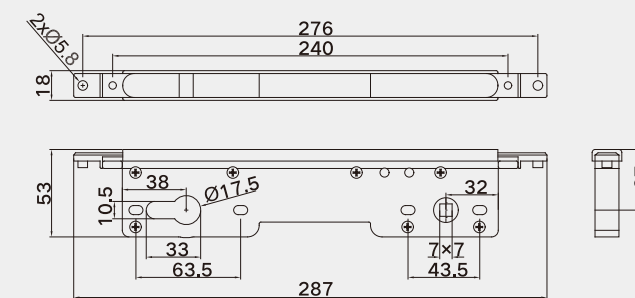


TB-CDG01

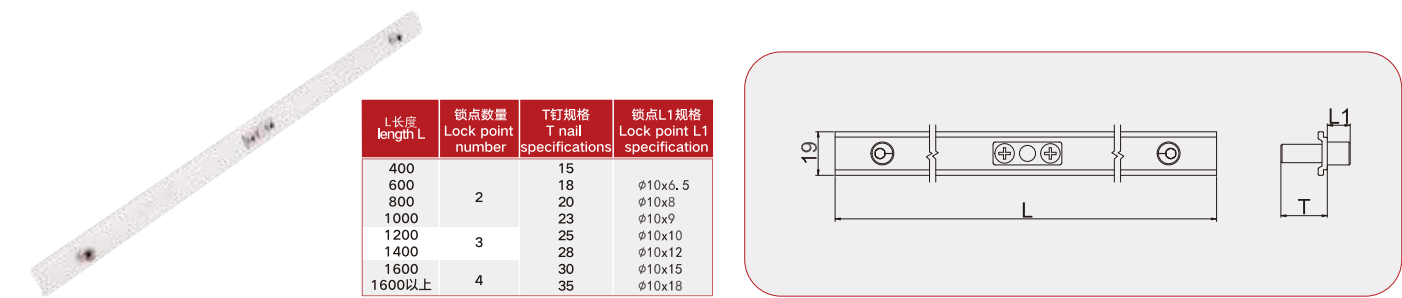


TB-CDG02

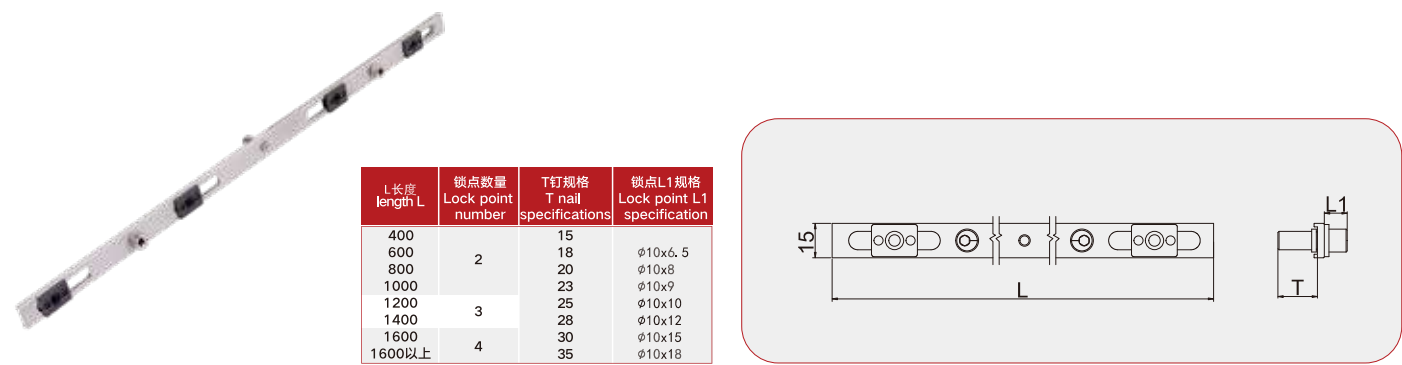


TB-CDG04A/CDG04B

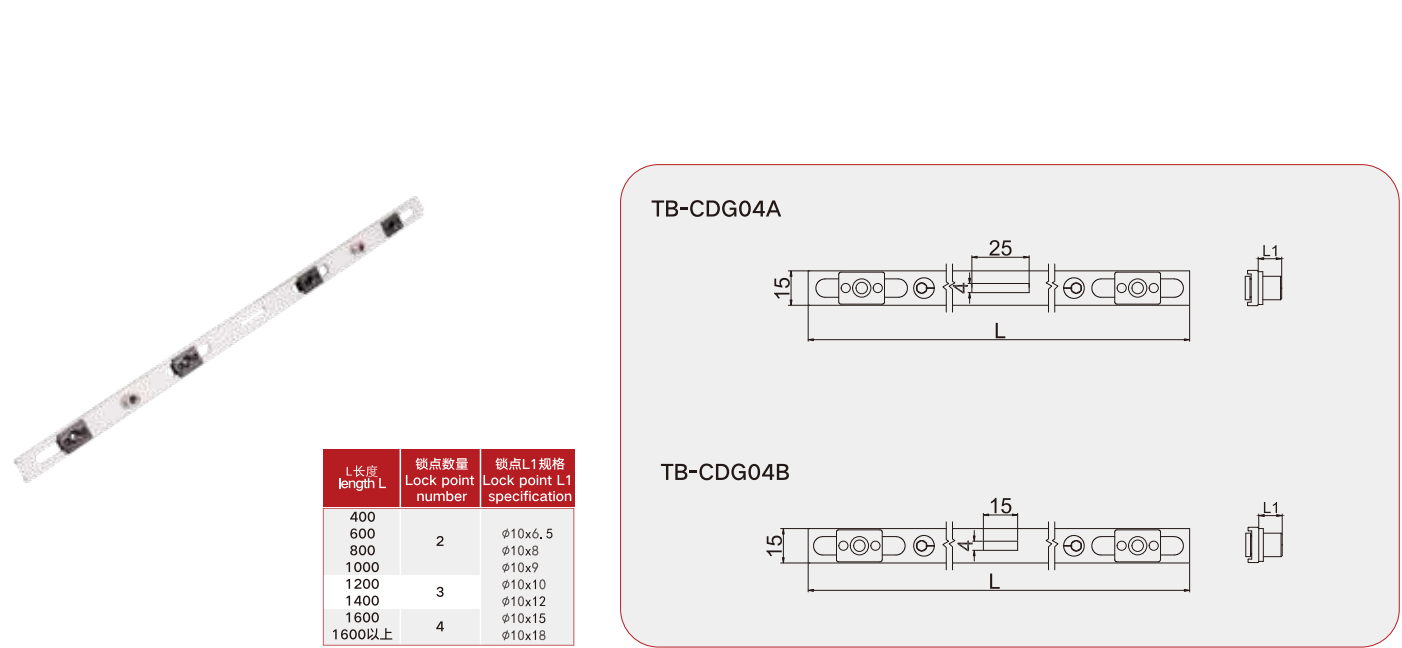

TB-CDG05A/CDG05B/CDG05C

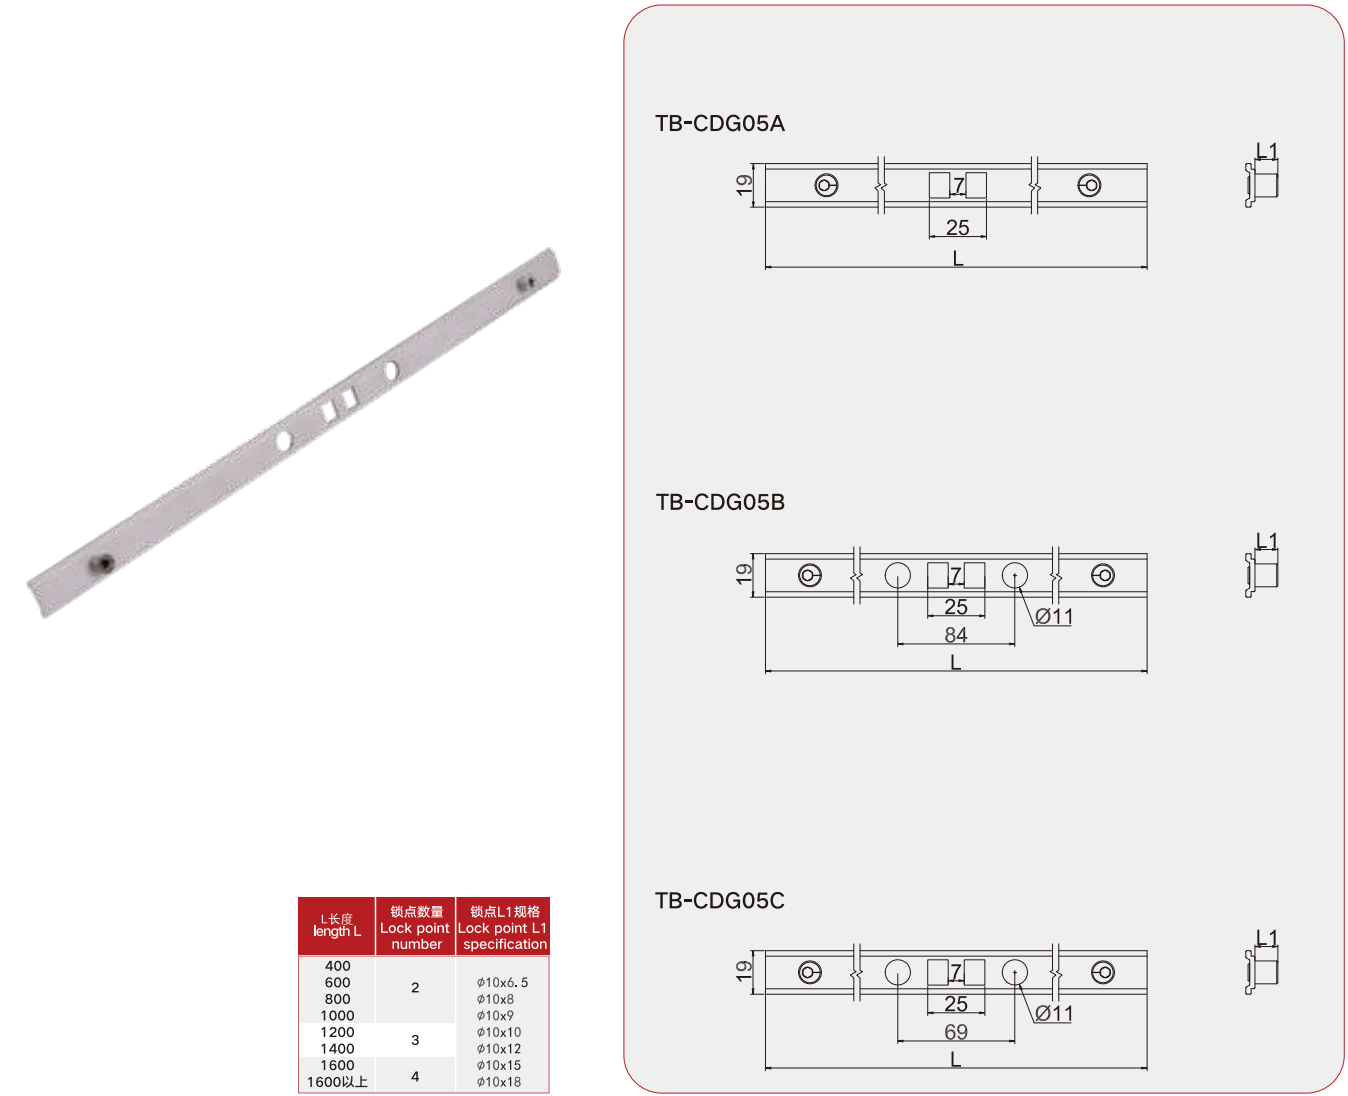


TB-CDG12

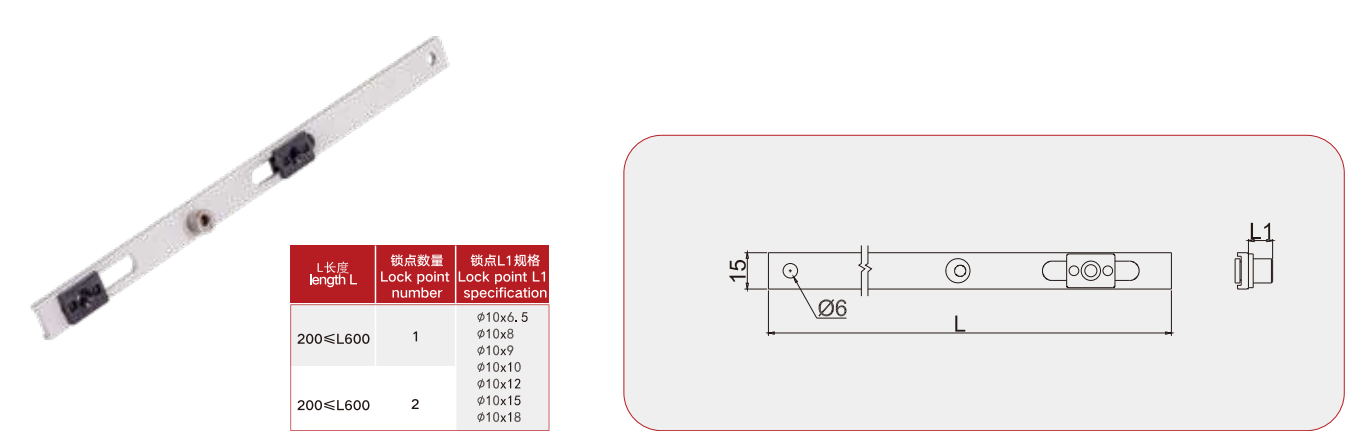

TB-CDG12T




L长度 length L	锁点数量 Lock point number	锁点L1规格 Lock point L1 specification
200≤L<600	1	φ8x6.5 φ8x10 φ8x12 φ8x15 φ8x18 φ8x22
600≤L≤800	2	

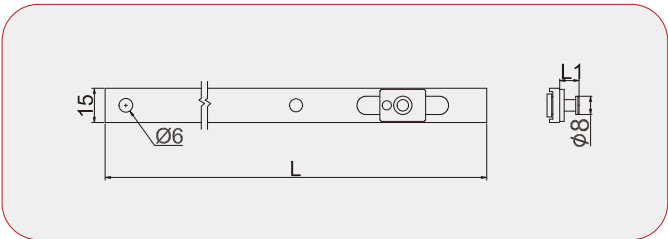

TB-CDG13




L长度 length L	锁点数量 Lock point number	锁点L1规格 Lock point L1 specification
200≤L<600	1	φ10x6.5 φ10x8 φ10x9 φ10x10 φ10x12 φ10x15 φ10x18
600≤L≤800	2	

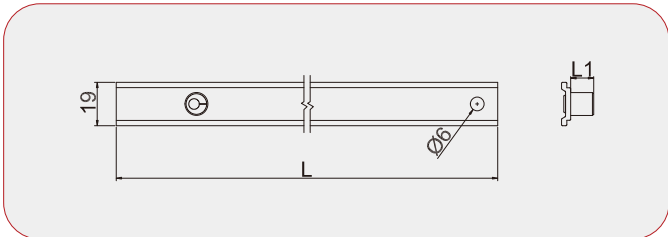

TB-CDG16




L长度 length L	锁点数量 Lock point number	锁点L1规格 Lock point L1 specification
400 600 800 1000	2	φ10x6.5 φ10x8 φ10x9 φ10x10 φ10x12 φ10x15 φ10x18
1200 1400 1600	3	
1600以上	4	

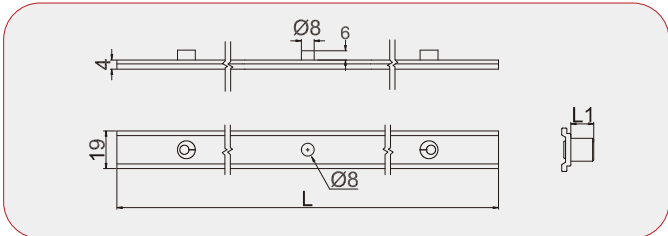

TB-CDG17T




L长度 length L	锁点数量 Lock point number	T钉规格 T nail specifications	锁点L1规格 Lock point L1 specification
400 600 800 1000	2	15 18 20 23	φ8x6.5 φ8x10 φ8x12 φ8x15 φ8x18 φ8x22
1200 1400 1600	3	25 28 30	
1600以上	4	35	

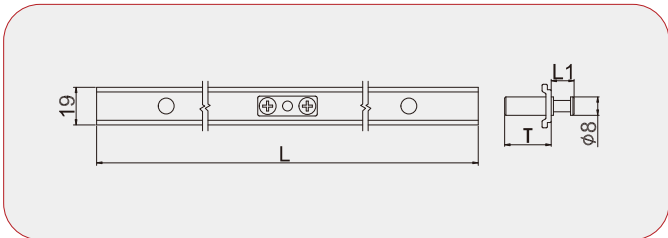

TB-CD26
单柱锁钉块
Single column lock block




锁点L规格 Lock point L specification
φ10x6.5 φ10x8 φ10x9 φ10x10 φ10x12 φ10x15 φ10x18

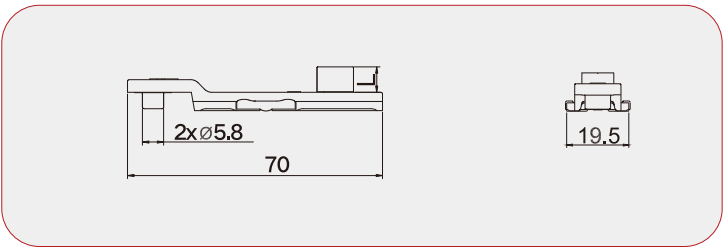


TB-CD28
双柱锁钉块
Double column lock block




锁点L规格 Lock point L specification
φ10x6.5 φ10x8 φ10x9 φ10x10 φ10x12 φ10x15 φ10x18

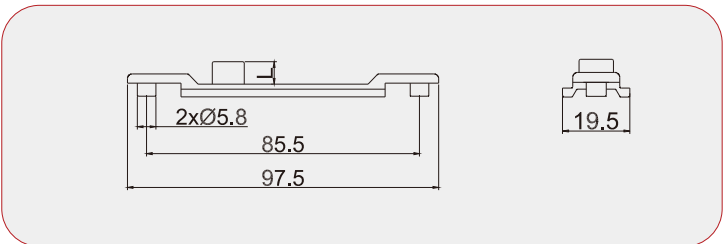

TB-CD29
上悬连接器
Top hung connector

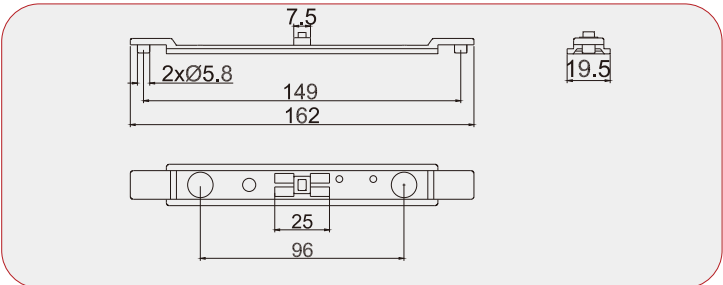


TB-CD30
内开连接器
Inward open connector

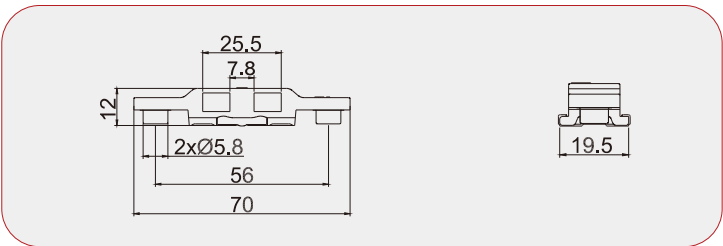


TB-CD03A
外开连接器
Outward open connector



T钉规格 T nail specifications
15 18 20 23 25 28 30 35

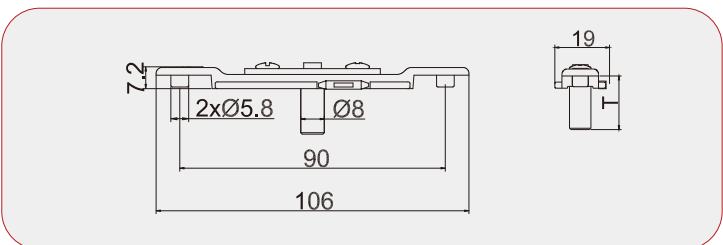

TB-SZ17A

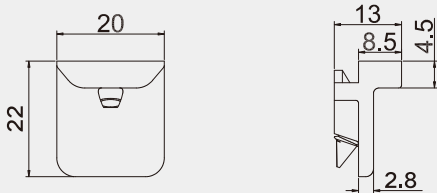


TB-SD41A


活动锁点
Activity lock



L活动锁点高度 (mm) L active lock height

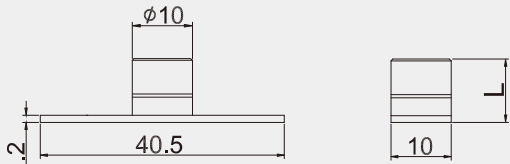


TB-SZ17B

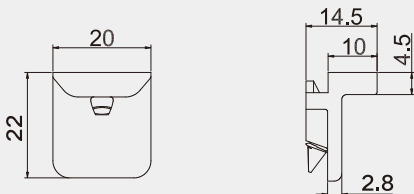


TB-SZ45/SZ45A/SZ45B



- ◆ SZ45高L为9mm
- ◆ SZ45A高L为10.8mm、SZ45B高L为14mm
- The height of SZ45 L is 9mm, and the height of SZ45A L is 10.8mm, the height of SZ45B L is 14mm.

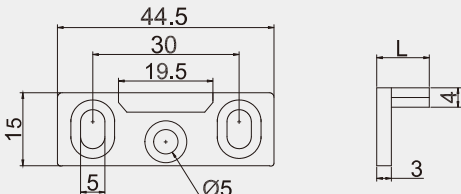


TB-SZ17C

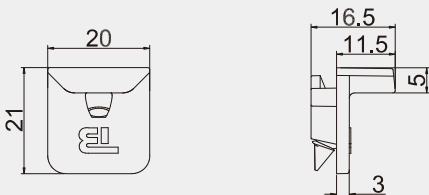


TB-SZ88/SZ88A




- ◆ SZ88高L为9mm，SZ88A高L为11.5mm
- The height of SZ88 L is 9mm, and the height of SZ88A L is 11.5mm.

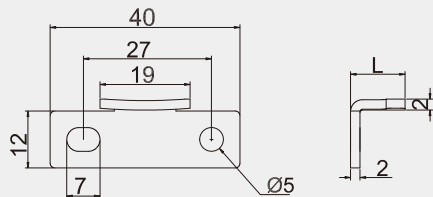

TB-SZ18

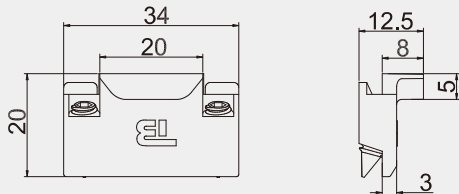


TB-SZ91

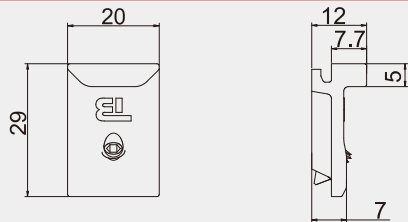


TB-SZ19A


可调锁座
Adjustable lock plate

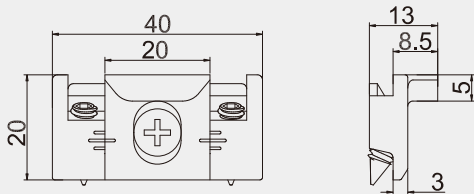


TB-SZ93

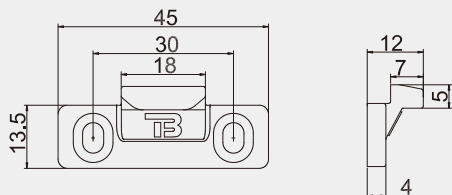


TB-SZ33

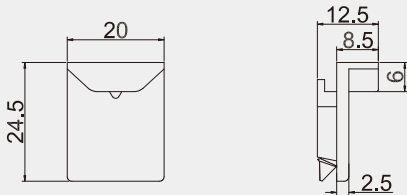


TB-SZ94

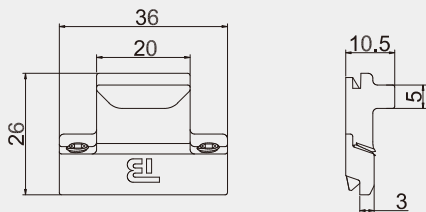


TB-TSK01

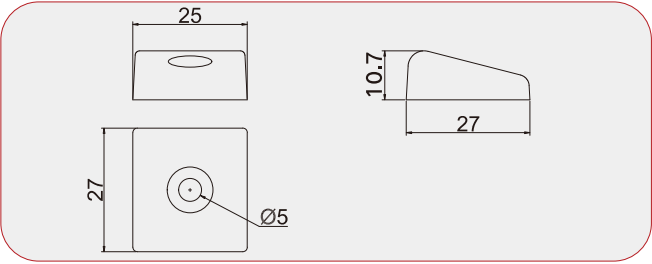


TB-TSK02

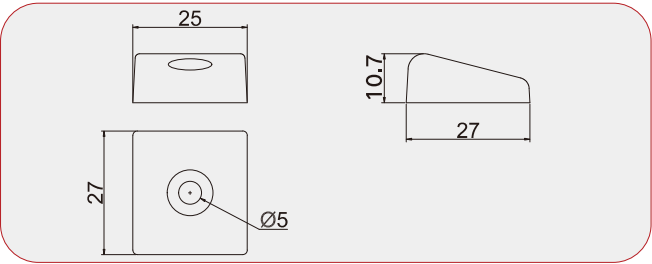


TB-TSK03

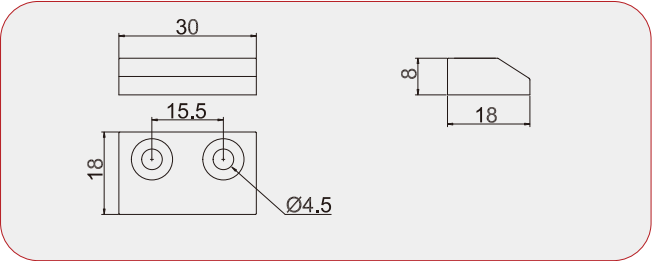



TB-TSK04

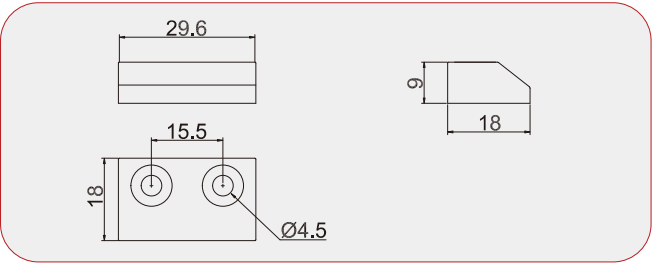


TB-TSK14

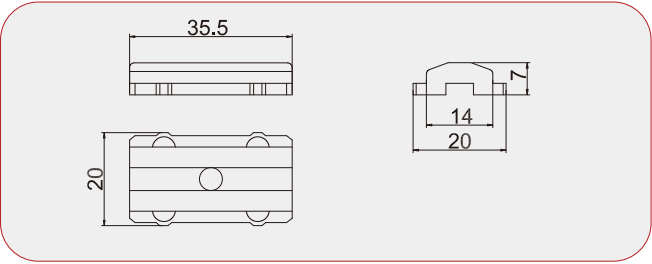


TB-TSK27

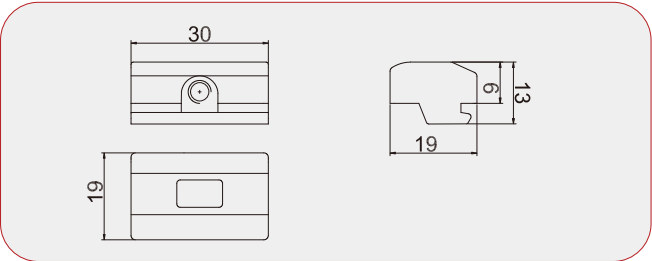


TB-ZSZ01

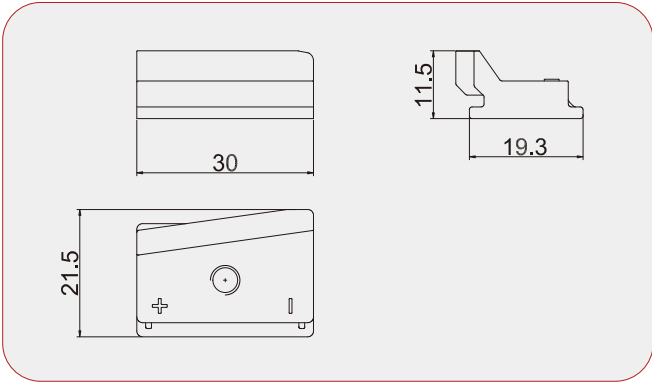


TB-ZSZ02

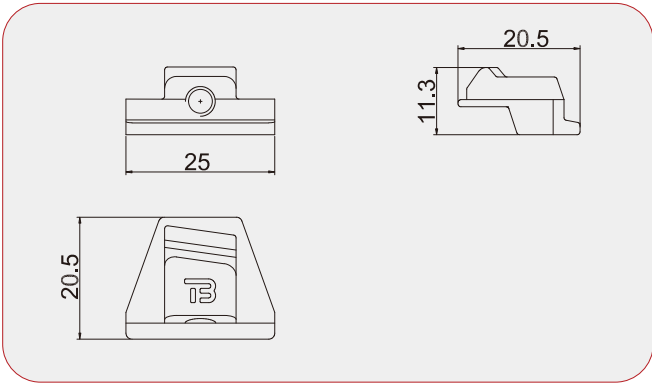


TB-ZSZ03

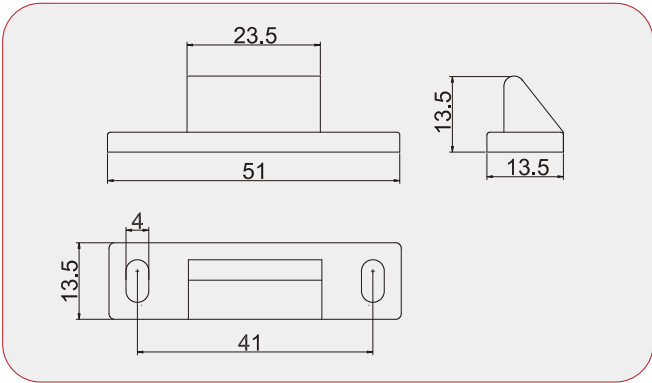

TB-ZSZ04

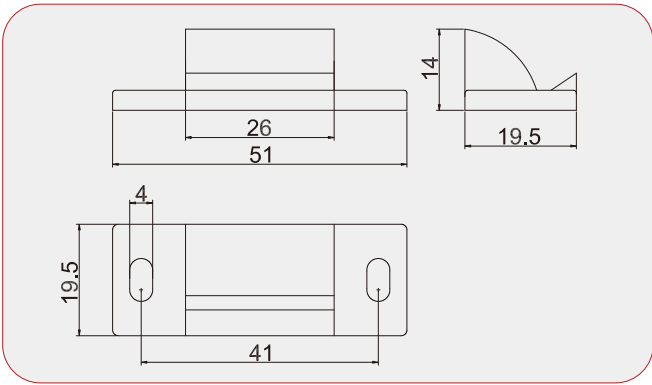


TB-CX13

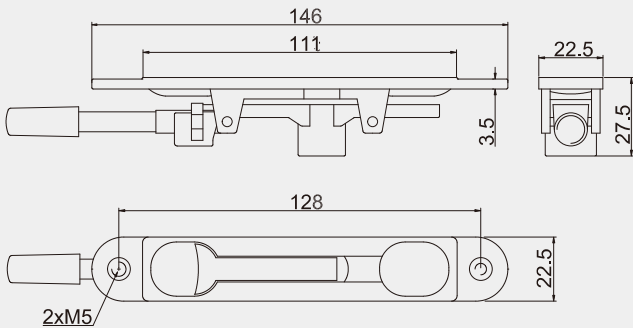


TB-AQS01



- ◆ 材质304不锈钢
- Material is 304 stainless steel.

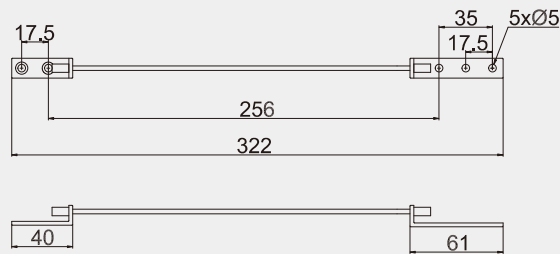


TB-CX22

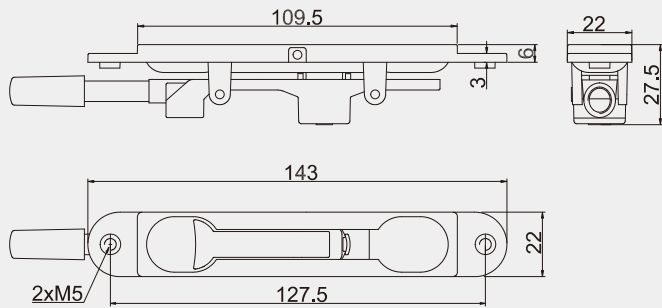


TB-AQS02



- ◆ 适用于无槽
- Applicable to no slot.

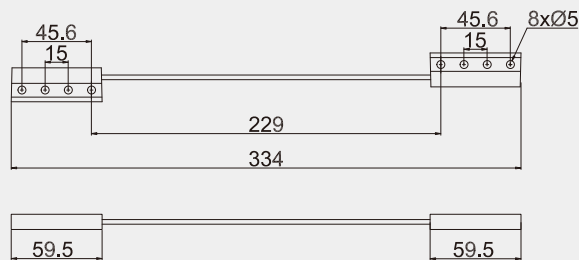

TB-CX28

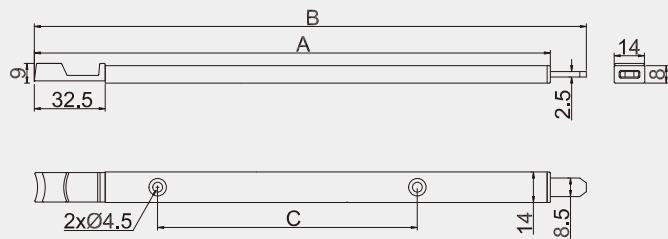


- ◆ 可做160、240、600、1000mm等长度
- Can do 160, 240, 600, 1000mm length.


TB-AQS03



- ◆ 适用于欧标20槽
- Applicable to euro standard 20 slot.

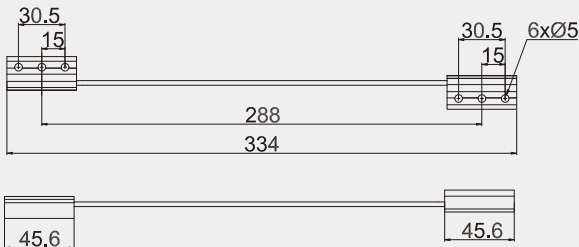


TB-CX29

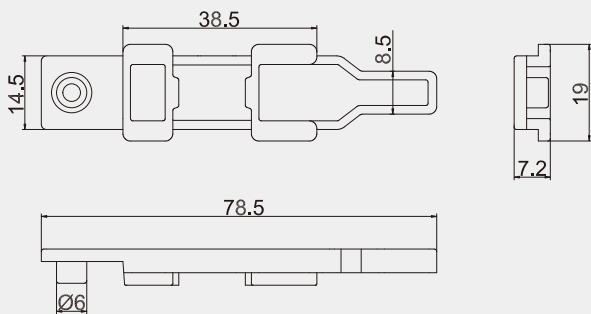

TB-AQS04




- ◆ 适用于一边欧标20槽，一边无槽
- It is suitable for one side standard 20 slot and the other side without slot.

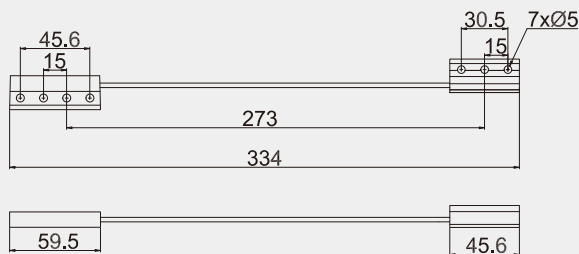

TB-TS02




- ◆ 直钩30.8mm、35.5mm、42mm
- ◆ 曲钩30.8mm、35mm、42mm
- Straight hook 30.8mm, 35.5mm, 42mm,
- Hook is 30.8mm, 35mm and 42mm,

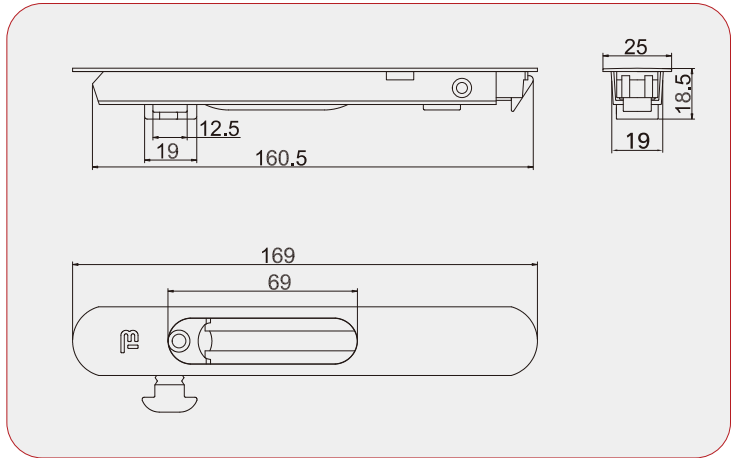

TB-TS18




- ◆ 直钩30.8mm、35.5mm、42mm
- ◆ 曲钩30.8mm、35mm、42mm
- Straight hook 30.8mm, 35.5mm, 42mm,
- Hook is 30.8mm, 35mm and 42mm,

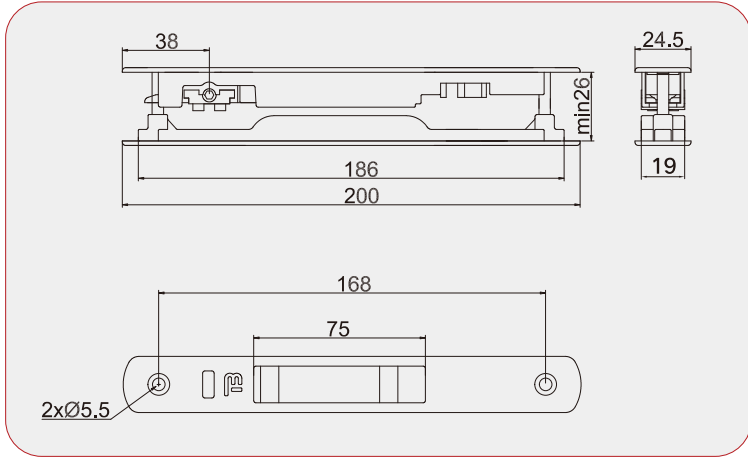

TB-TS17A




- ◆ 直钩30.8mm、35.5mm、42mm
- ◆ 曲钩30.8mm、35mm、42mm
- Straight hook 30.8mm, 35.5mm, 42mm,
- Hook is 30.8mm, 35mm and 42mm,

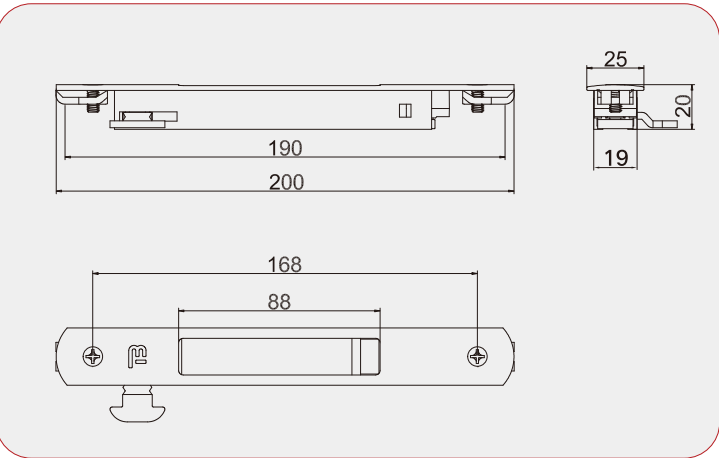

TB-TS18A




- ◆ 直钩30.8mm、35.5mm、42mm
- ◆ 曲钩30.8mm、35mm、42mm
- Straight hook 30.8mm, 35.5mm, 42mm,
- Hook is 30.8mm, 35mm and 42mm,

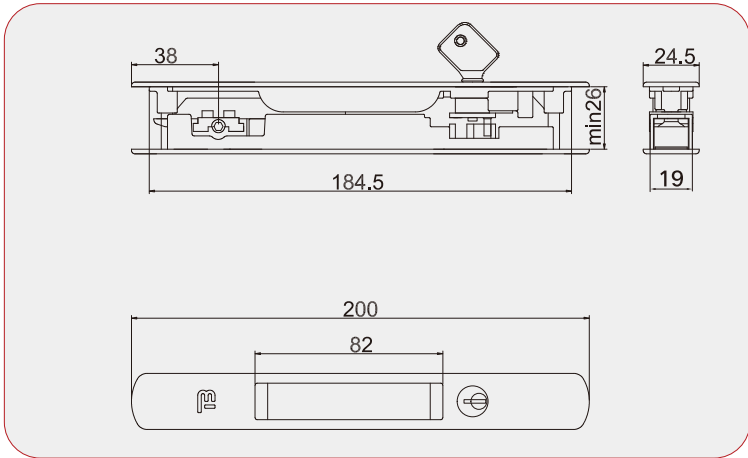


TB-TS17B




- ◆ 直钩30.8mm、35.5mm、42mm
- ◆ 曲钩30.8mm、35mm、42mm
- Straight hook 30.8mm, 35.5mm, 42mm,
- Hook is 30.8mm, 35mm and 42mm,

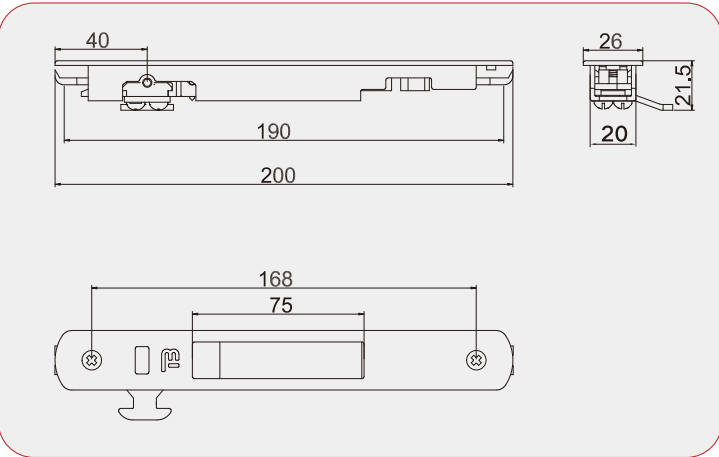


TB-TS18B

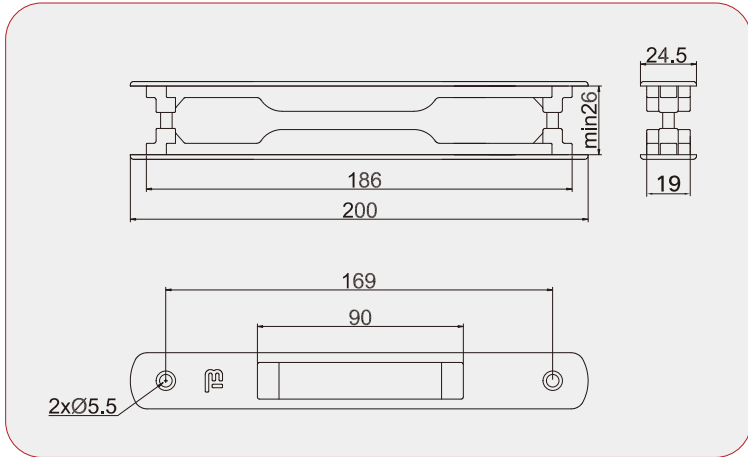

TB-TS41

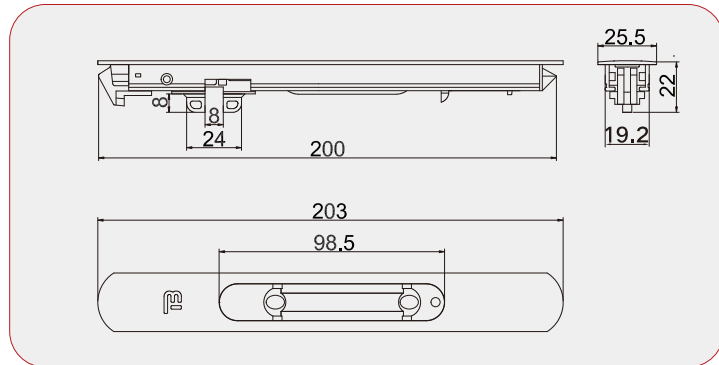


TB-TS25

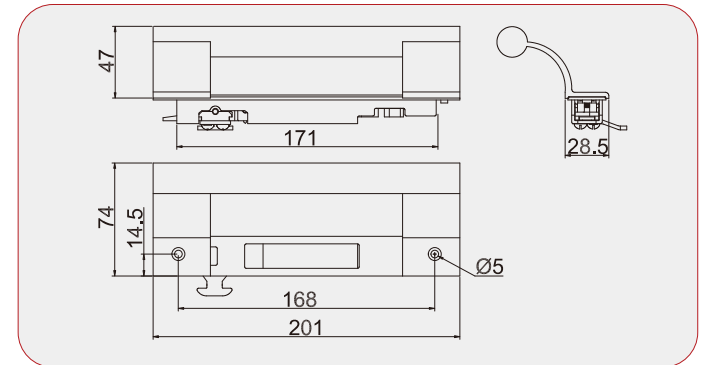


- ◆ 直钩30.8mm、35.5mm、42mm
- ◆ 曲钩30.8mm、35.5mm、42mm
- Straight hook 30.8mm, 35.5mm, 42mm.
- Hook is 30.8mm, 35.5mm and 42mm.

TB-TS42

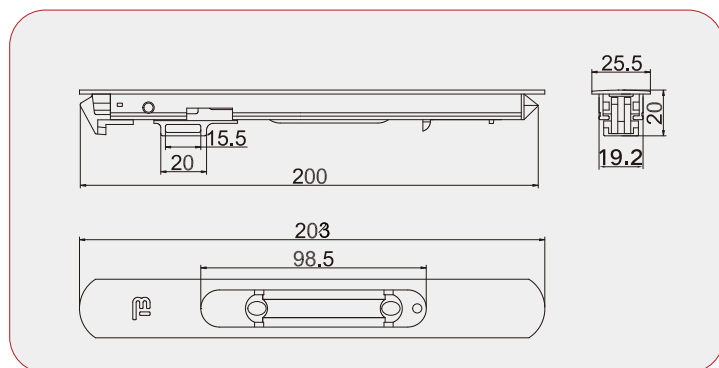


- ◆ 直钩30.8mm、35.5mm、42mm
- ◆ 曲钩30.8mm、35.5mm、42mm
- Straight hook 30.8mm, 35.5mm, 42mm.
- Hook is 30.8mm, 35.5mm and 42mm.


TB-TLS25

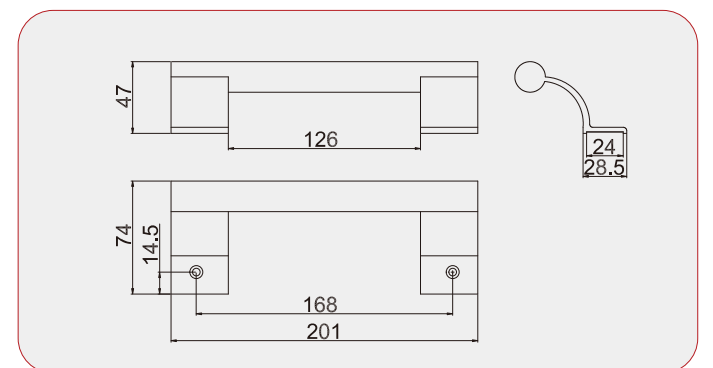


TB-TS43

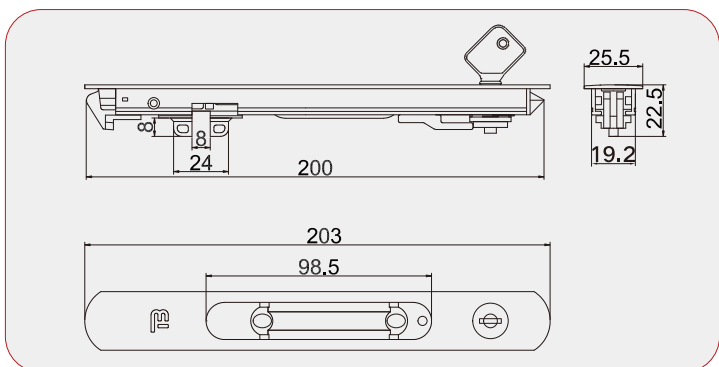

TB-TLS30

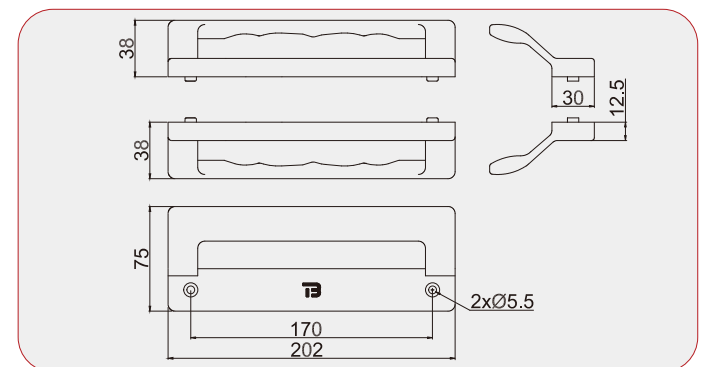


TB-TS44

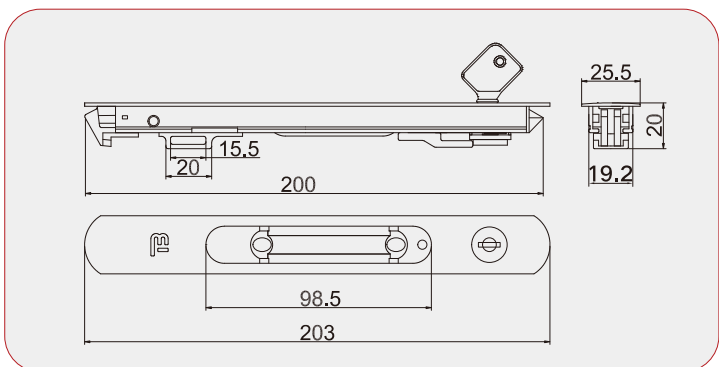


- ◆ 直钩30.8mm、35.5mm、42mm
- ◆ 曲钩30.8mm、35.5mm、42mm
- Straight hook 30.8mm, 35.5mm, 42mm.
- Hook is 30.8mm, 35.5mm and 42mm.

TB-TLS30A

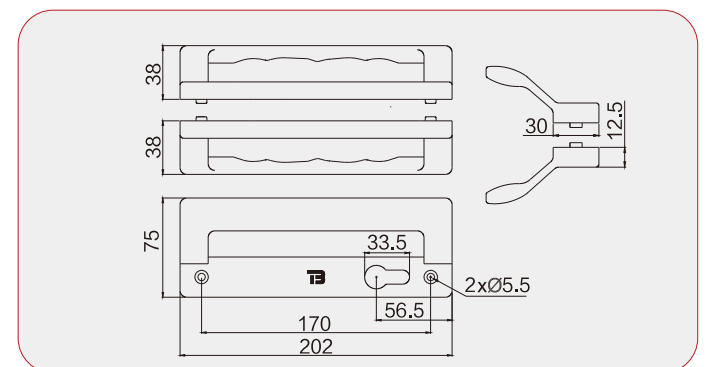


- ◆ 分左右
- Left or right optional.

TB-SZ63/SZ63A/SZ63B

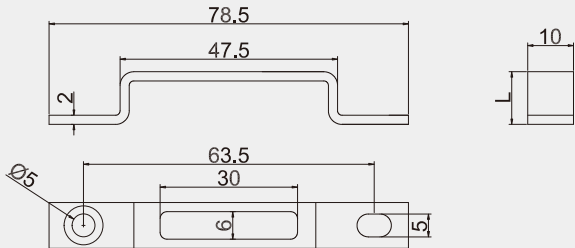


◆ SZ63高L为9.5mm、SZ63A高L为10.5mm、SZ63B高L为11.5mm
● The height of SZ63 L is 9.5mm, the height of SZ63A L is 10.5mm, and the height of SZ63B L is 11.5mm.


TB-SZ65L

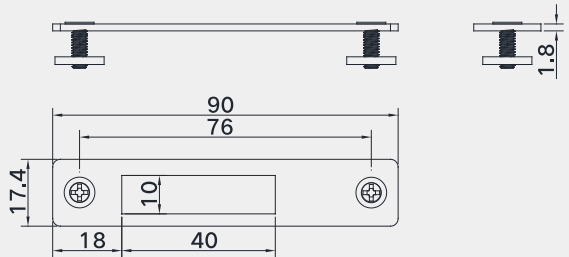


TB-SZ66

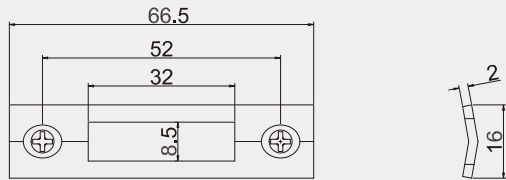

TB-SZ66A

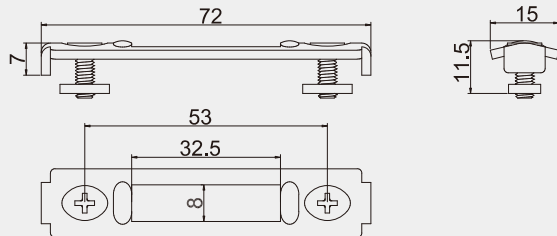


TB-SZ67

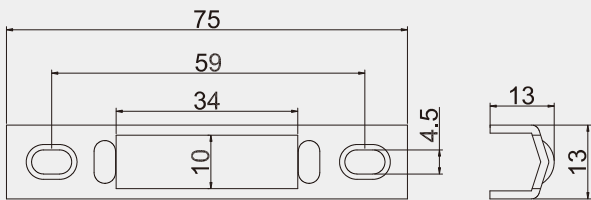

TB-SZ67A/SZ67B/SZ67C




◆ SZ67A高L为12mm、SZ67B高L为10mm、SZ67C高L为8mm
● The height L of SZ67A is 12mm, the height L of SZ67B is 10mm, and the height L of SZ67C is 8mm.

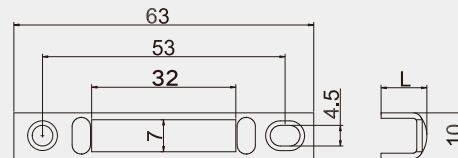


TB-SZ75/SZ75A




◆ SZ75高L为12mm、SZ75A高L为8mm
● The height of SZ75 L is 12mm, and the height of SZ75A L is 8mm.

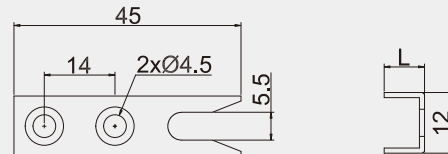

TB-SZ77

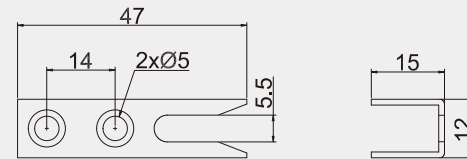


TB-SZ86

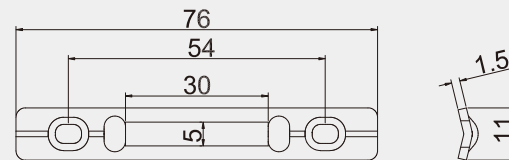


TB-SZ89



◆ 与门插销配套使用
● Use with door bolt.

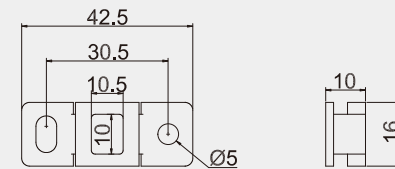


TB-SZ90A

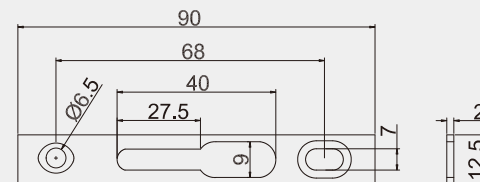

TB-YS01




- ◆ 分左右
- Left or right for option.

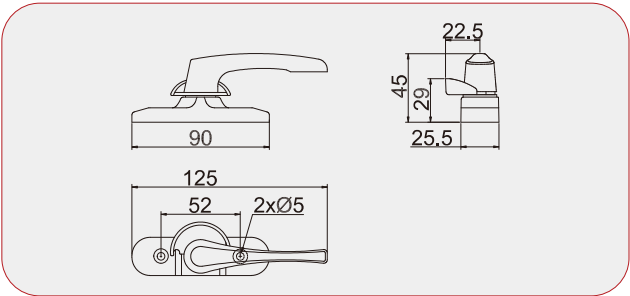

TB-YG03/YG03A




- ◆ YG03钩长L为53mm
- ◆ YG03A钩长L为60mm
- YG03 hook length L is 53mm,YG03A hook length L is 60mm.

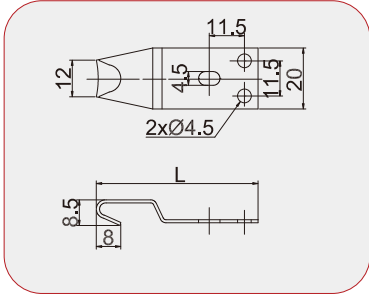


TB-YG14



- ◆ L钩长范围43mm~47mm
- L hook length range is 43mm~47mm.

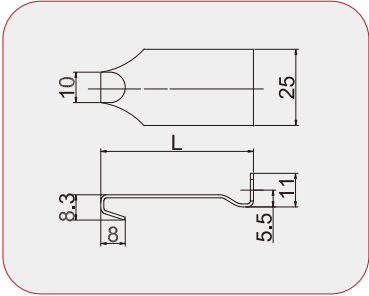


TB-YS51

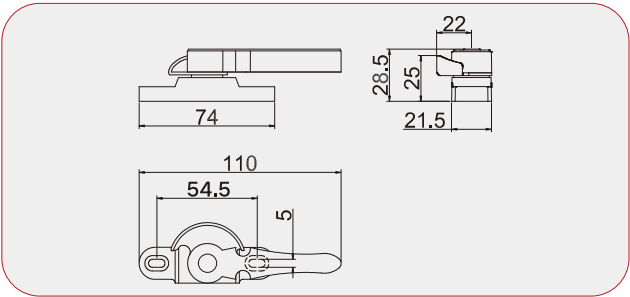

TB-YG15




- ◆ L钩长范围38mm~64mm
- L hook length range is 38mm~64mm.

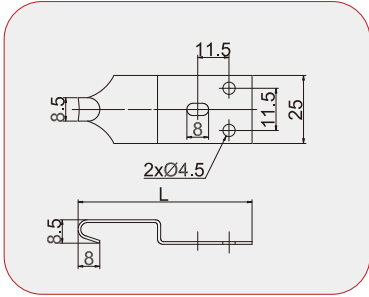


TB-YG16



- ◆ L钩长范围41mm~47mm
- L hook length range is 41mm~47mm.

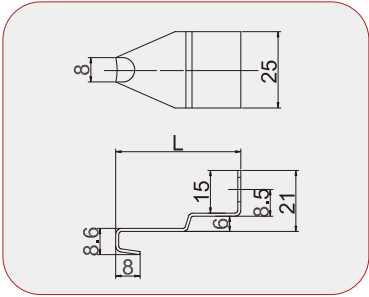


TB-YS52

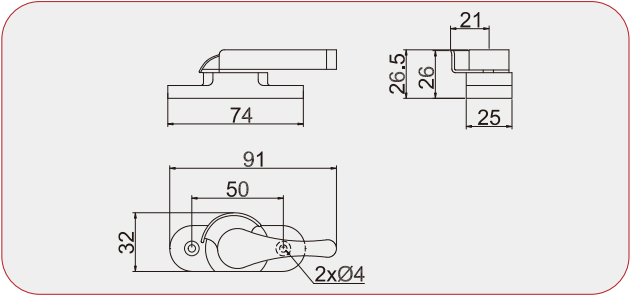

TB-YG20




- ◆ L钩长范围30mm~61mm
- L hook length range is 30mm~61mm.

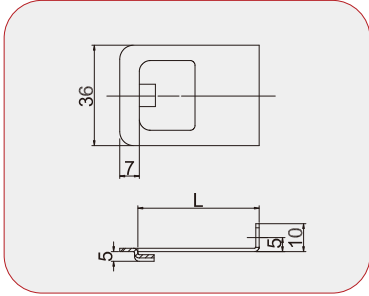


TB-YG21



- ◆ L钩长范围30mm~61mm
- L hook length range is 30mm~61mm.

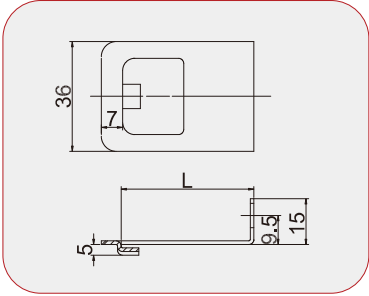


TB-YS60

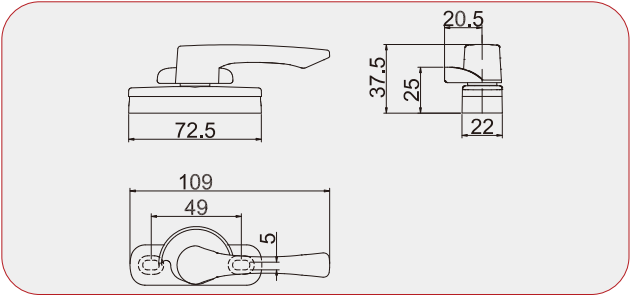

TB-YG21A




- ◆ L钩长范围30mm~61mm
- L hook length range is 30mm~61mm.

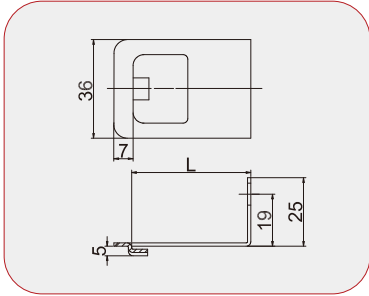


TB-YG21B



- ◆ L钩长范围30mm~61mm
- L hook length range is 30mm~61mm.

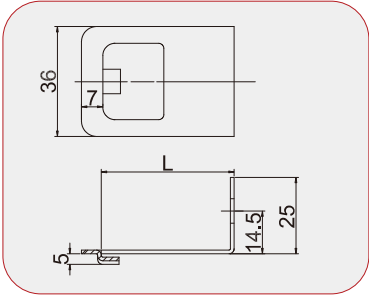


TB-YS61

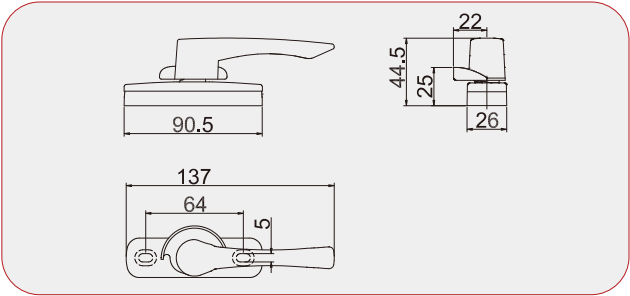

TB-YG22



- ◆ L钩长范围45mm~60mm
- L hook length range is 45mm~60mm.



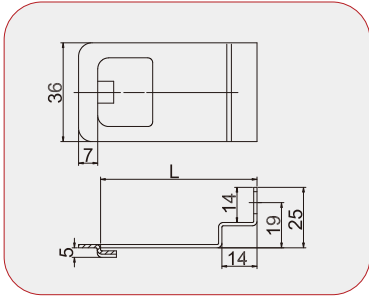


- ◆ 分左右
- Left or right for option.

TB-HLD02



滑轮外壳尺寸 Pulley housing size	
K	G
20	33,5
21	33
22	32,5
23	32
24	31,5





- ◆ 滑轮最大承重为40kg/组
- ◆ 上下可调节为±3.5mm
- The maximum bearing capacity of pulley is 40kg/ group.
- Upper and lower can be adjusted to ±3.5mm.

TB-HLS21



滑轮外壳尺寸 Pulley housing size	
K	G
22,5	23
23,5	22,5
24,5	22
25,5	21,5
26,5	21



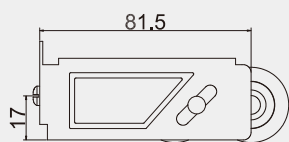


- ◆ 滑轮最大承重为80kg/组
- ◆ 上下可调节为±2mm
- The maximum bearing capacity of pulley is 80kg/ group.
- Upper and lower can be adjusted to ±2 mm.

TB-HLD03



滑轮外壳尺寸 Pulley housing size	
K	G
20,5	29,5
21,5	29
22,5	28,5
23,5	28
24,5	27,5






- ◆ 滑轮最大承重为40kg/组
- ◆ 上下可调节为±8mm
- The maximum bearing capacity of pulley is 40kg/ group.
- Upper and lower can be adjusted to ±8 mm.

TB-HLS85



滑轮外壳尺寸 Pulley housing size	
K	G
24,5	24
25,5	23,5
26,5	23
27,5	22,5
28,5	22

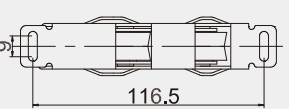

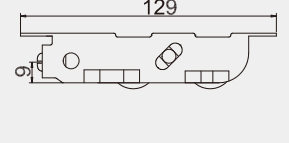


- ◆ 滑轮最大承重为80kg/组
- ◆ 上下可调节为±2mm
- The maximum bearing capacity of pulley is 80kg/ group.
- Upper and lower can be adjusted to ±2 mm.

TB-HLD21



滑轮外壳尺寸 Pulley housing size	
K	G
22	23,5
23	23
24	22,5
25	22
26	21,5






- ◆ 滑轮最大承重为40kg/组
- ◆ 上下可调节为±3.5mm
- The maximum bearing capacity of pulley is 40kg/ group.
- Upper and lower can be adjusted to ±3.5mm.

TB-HLS95



滑轮外壳尺寸 Pulley housing size	
K	G
30	25,5
31	25
32	24,5
33	24
34	23,5

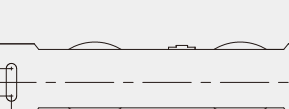

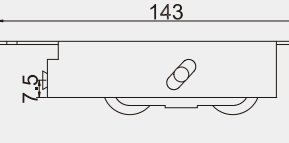


- ◆ 滑轮最大承重为80kg/组
- ◆ 上下可调节为±3.5mm
- The maximum bearing capacity of pulley is 80kg/ group.
- Upper and lower can be adjusted to ±3.5mm.

TB-HLS02






滑轮外壳尺寸 Pulley housing size	
K	G
20	33,5
21	33
22	32,5
23	32
24	31,5

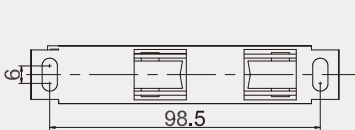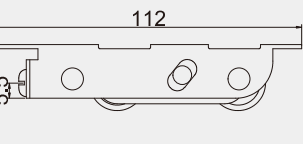

- ◆ 滑轮最大承重为80kg/组
- ◆ 上下可调节为±4 mm
- The maximum bearing capacity of pulley is 80kg/ group.
- Upper and lower can be adjusted to ±4 mm.

TB-HLS81-4



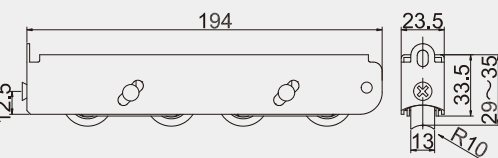


- ◆ 滑轮最大承重为150kg/组
- ◆ 上下可调节为±2.5 mm
- The maximum bearing capacity of pulley is 150kg/ group.
- Upper and lower can be adjusted to ±2.5mm.

TB-HLS03






滑轮外壳尺寸 Pulley housing size	
K	G
19,5	29,5
20,5	29
21,5	28,5
22,5	28
23,5	27,5

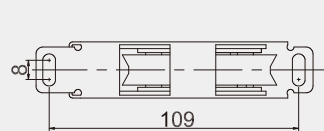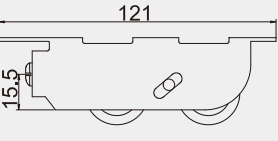

- ◆ 滑轮最大承重为80kg/组
- ◆ 上下可调节为±3.5mm
- The maximum bearing capacity of pulley is 80kg/ group.
- Upper and lower can be adjusted to ±3.5mm.

TB-HLS82-4

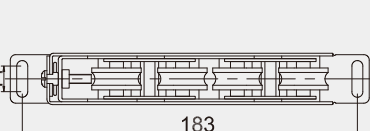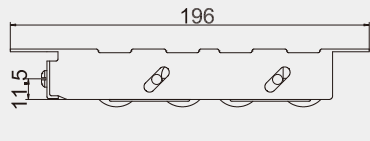

- ◆ 滑轮最大承重为150kg/组
- ◆ 上下可调节为±2.5mm
- The maximum bearing capacity of pulley is 150kg/ group.
- Upper and lower can be adjusted to ±2.5mm.

BRAND HISTORY

品牌历程

